


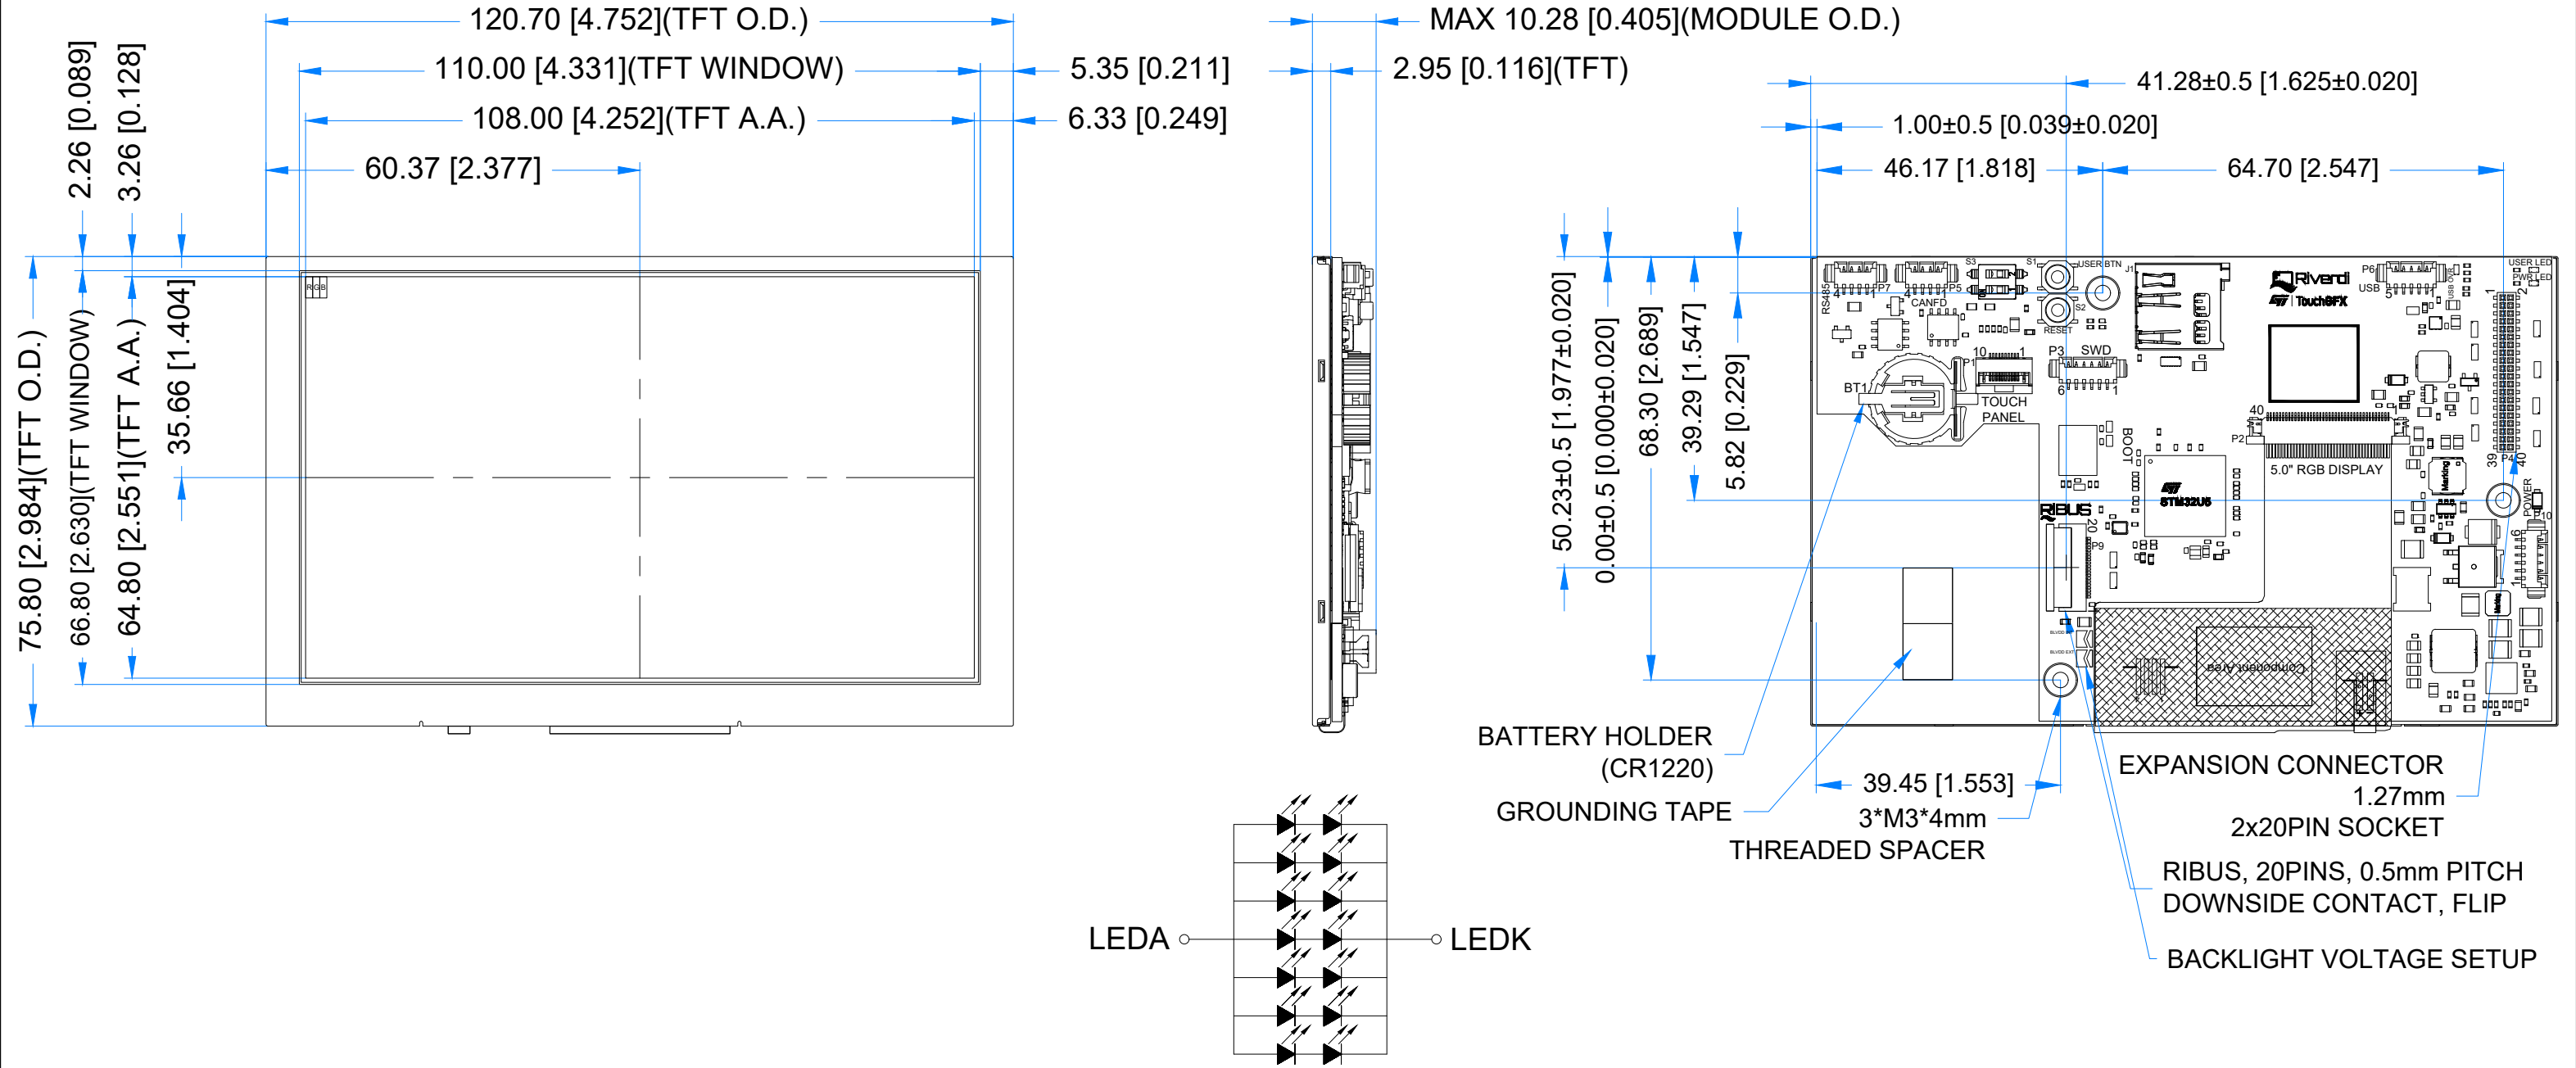

1.25 MM MOLEX CONNECTORS					
NO.	TYPE	MATE WITH			
P3 (SWD)	53261-0671	51021-0600			
P5 (CAN)	53261-0471	51021-0400			
P6 (USB)	53261-0571	51021-0500			
P7 (RS485)	53261-0471	51021-0400			
P10 (POWER)	53261-0671	51021-0600			
			1.27MM PIN HEADER		
NO.	TYPE	MATE WITH	NO.	TYPE	MATE WITH
			P4	CBC1402M100-2P	CH51402M100-0P OR CH51402V100
TFT NOTES: 1. DISPLAY TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS 2. RESOLUTION: 800x480 3. VIEWING ANGLE: FREE 4. SURFACE LUMINANCE: 1000 cd/m^2 5. MCU ON THE BOARD: STM32U5G9NJH6Q 6. EXTERNAL FLASH MEMORY SIZE: 512Mbit 7. SUPPLY VOLTAGE FOR MODULE: 6.0V - 48.0V			GENERAL NOTES: 1. OPERATING TEMPERATURE: -20°C ~ 70°C 2. STORAGE TEMPERATURE: -30°C ~ 80°C 3. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm[0.012inch] 4. TOLERANCE OF PCB PLACEMENT: ±0.5mm[0.020inch] 5. RoHS3 COMPLIANT		
			PN: RVT50HQSNNW01 SN: DRAWN: M.Natywa2024.07.121:1.00 CHECKED: M.Wierzbowski2024.07.12[mm] APPR: T.Soldat2024.07.12ISO A3P. 1 of 1		