

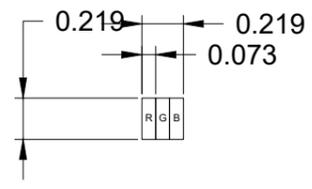
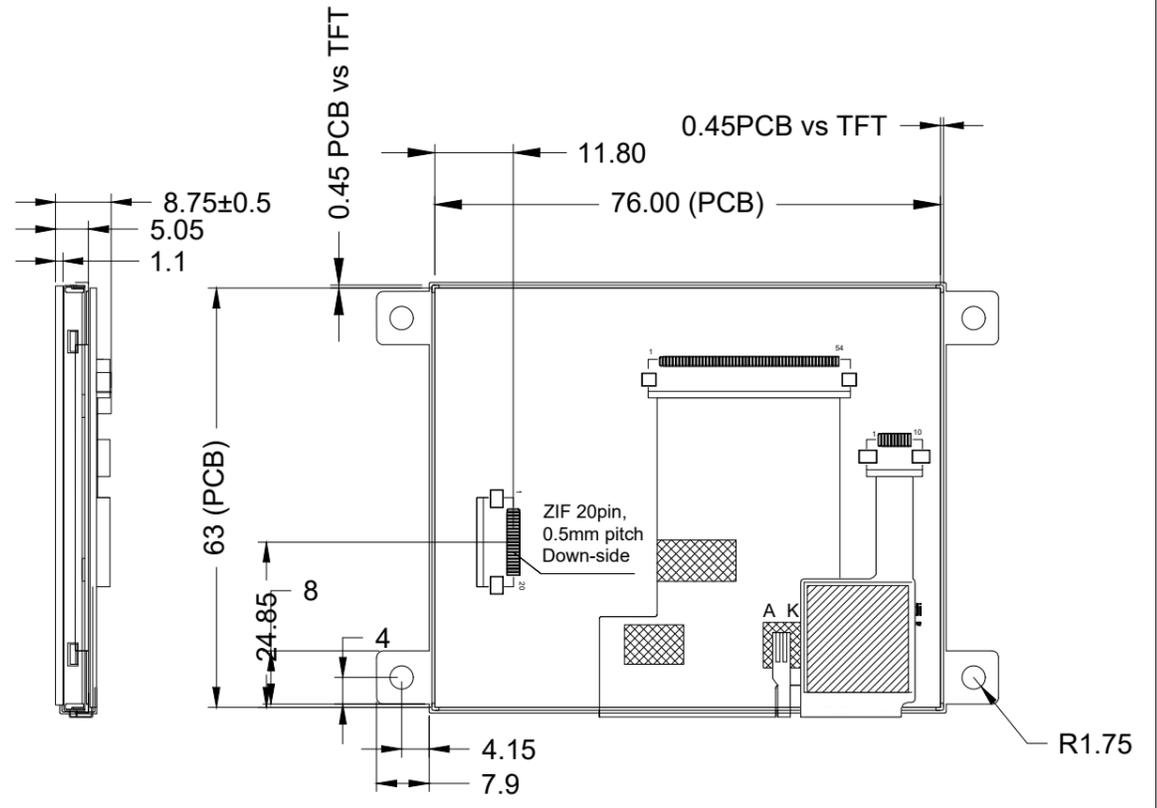


PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

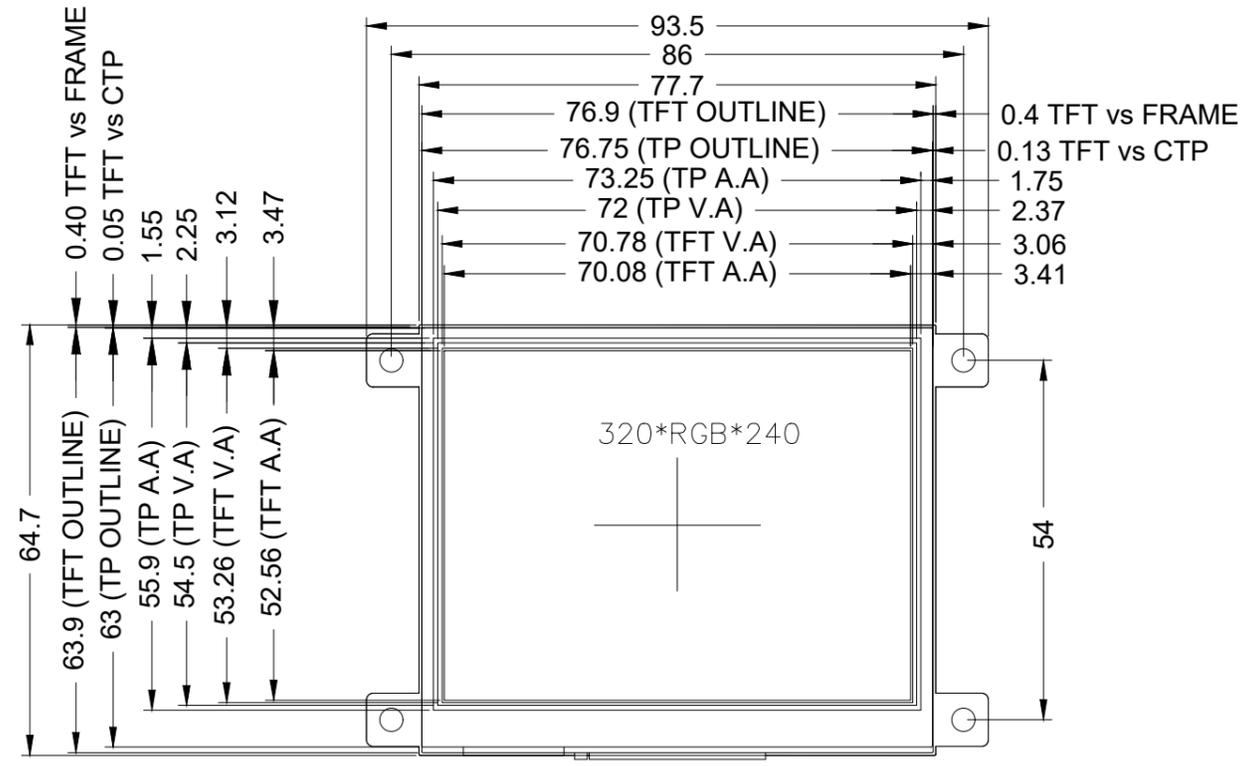

INTERNAL BACKLIGHT LED CONNECTION

- NOTES:
- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
 - OPERATION VOLTAGE: VDD=3.3V
 - VIEWING DIRECTION: 12 O'CLOCK
 - IC CONTROLLER: FT801
 - OPERATING TEMP.: -20°C ~ 70°C
 - STORAGE TEMP.: -30°C ~ 80°C
 - LED BACKLIGHT: 6-LED WHITE, BUILT-IN INVERTER
 - SURFACE LUMINANCE: 480 cd/m²
 - GENERAL TOLERANCE: ±0.2
 - RoHS COMPLIANT

Ver.	DESCRIPTION	DATE
1.1	Dimension overhaul	2018.10.22
1.0	Initial case	2014.12.23

CUSTOMER		DATE	2018.10.22	
DRAWN		SCALE	TITLE	
DFTG CHK		UNIT	RVT3.5B320240CFWC81	
ENGR CHK		mm	MODEL	
APPROVAL			DWG NO	
RIVERDI		Rev. 1.1		PAGE
				1/1