
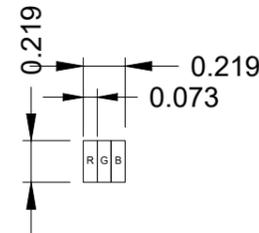
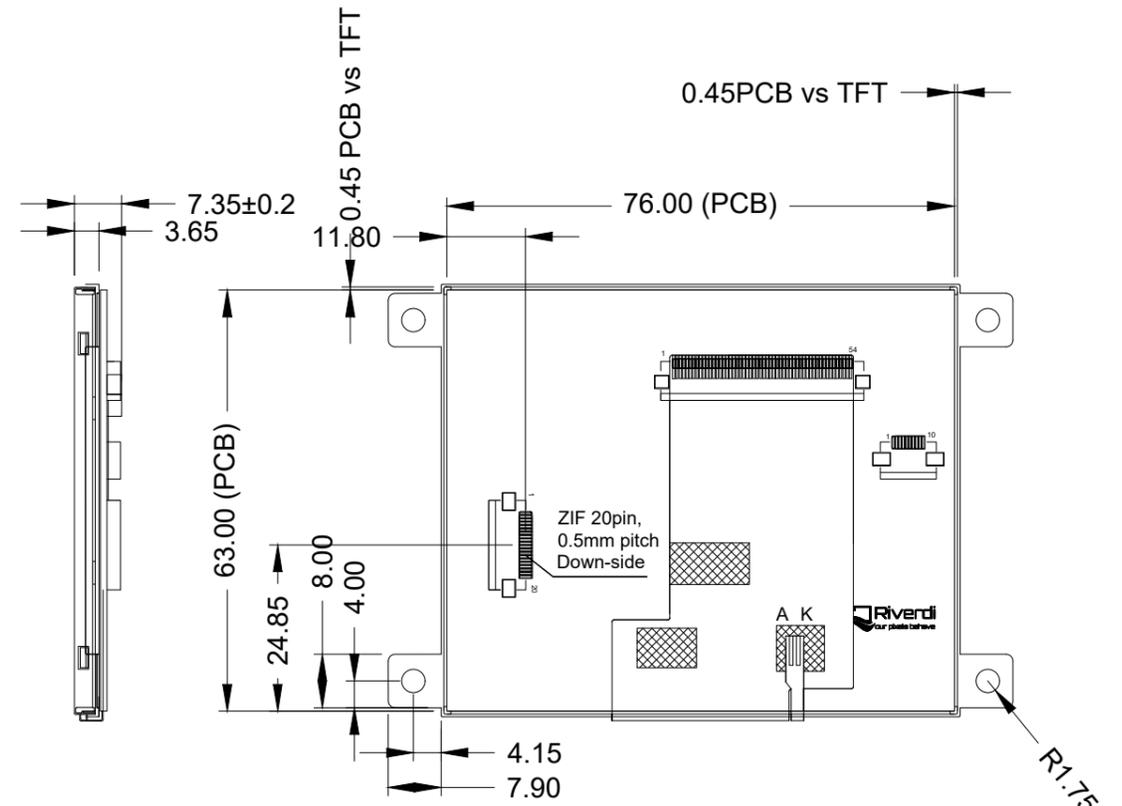


PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

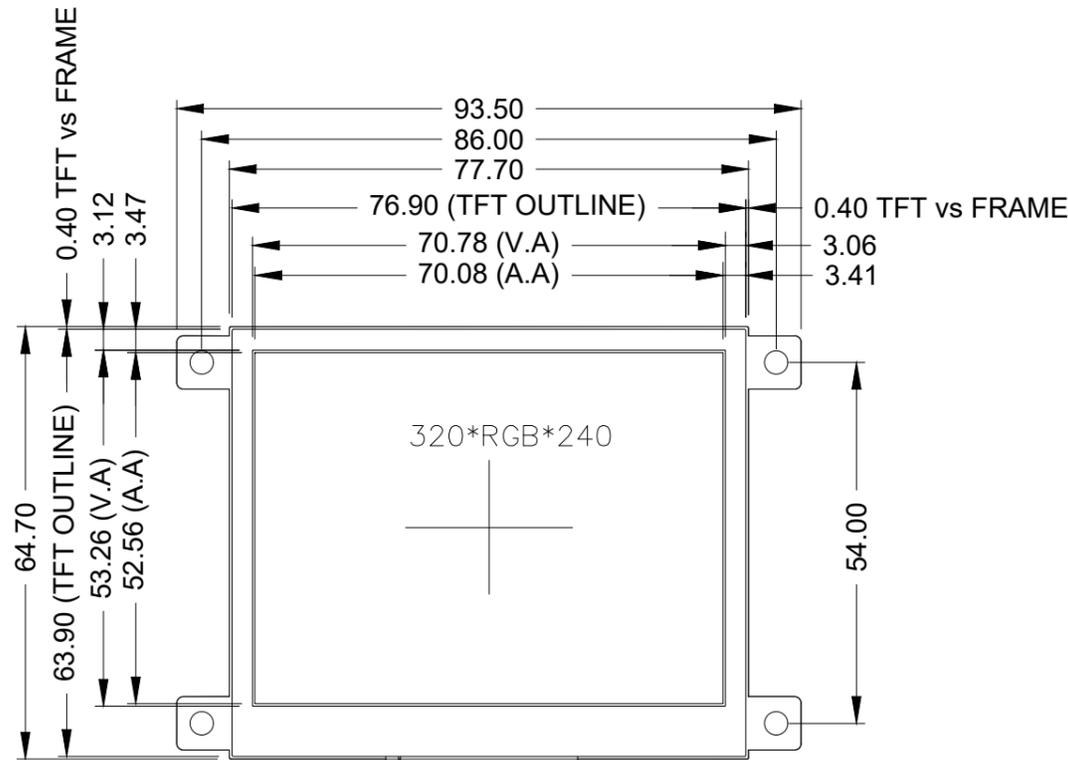

INTERNAL BACKLIGHT LED CONNECTION

NOTES:

- |                       |                                   |
|-----------------------|-----------------------------------|
| 1. DISPLAY TYPE:      | TFT, TRANSMISSIVE, NORMALLY WHITE |
| 2. OPERATION VOLTAGE: | VDD=3.3V                          |
| 3. VIEWING DIRECTION: | 12 O'CLOCK                        |
| 4. IC CONTROLLER:     | FT800                             |
| 5. OPERATING TEMP.:   | -20°C ~ 70°C                      |
| 6. STORAGE TEMP.:     | -30°C ~ 80°C                      |
| 7. LED BACKLIGHT:     | 6-LED WHITE, BUILT-IN INVERTER    |
| 8. SURFACE LUMINANCE: | 500 cd/m <sup>2</sup>             |
| 9. GENERAL TOLERANCE: | ±0.2                              |
| 10. RoHS COMPLIANT    |                                   |

1.1	Dimension overhaul	2018.10.22
1.0	Initial case	2014.12.23
Ver.	DESCRIPTION	DATE

CUSTOMER APVL		DATE	2018.10.31
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	RVT3.5B320240CFWN00	
ENGR CHK	mm	MODEL	
APPROVAL		DWG NO	
<b>Riverdi</b>		Rev. 1.1	PAGE
			1/1