
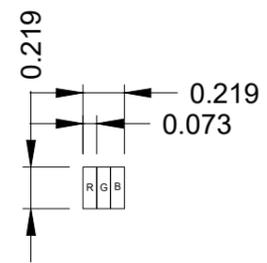
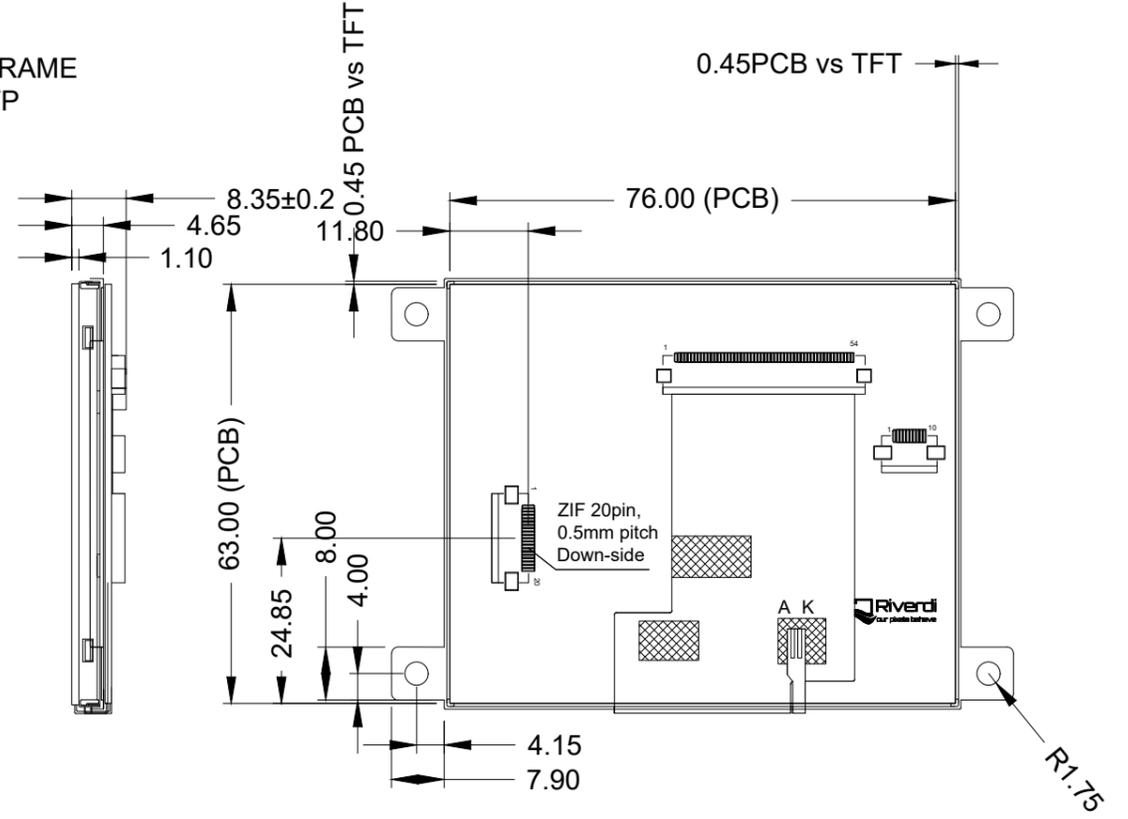


PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

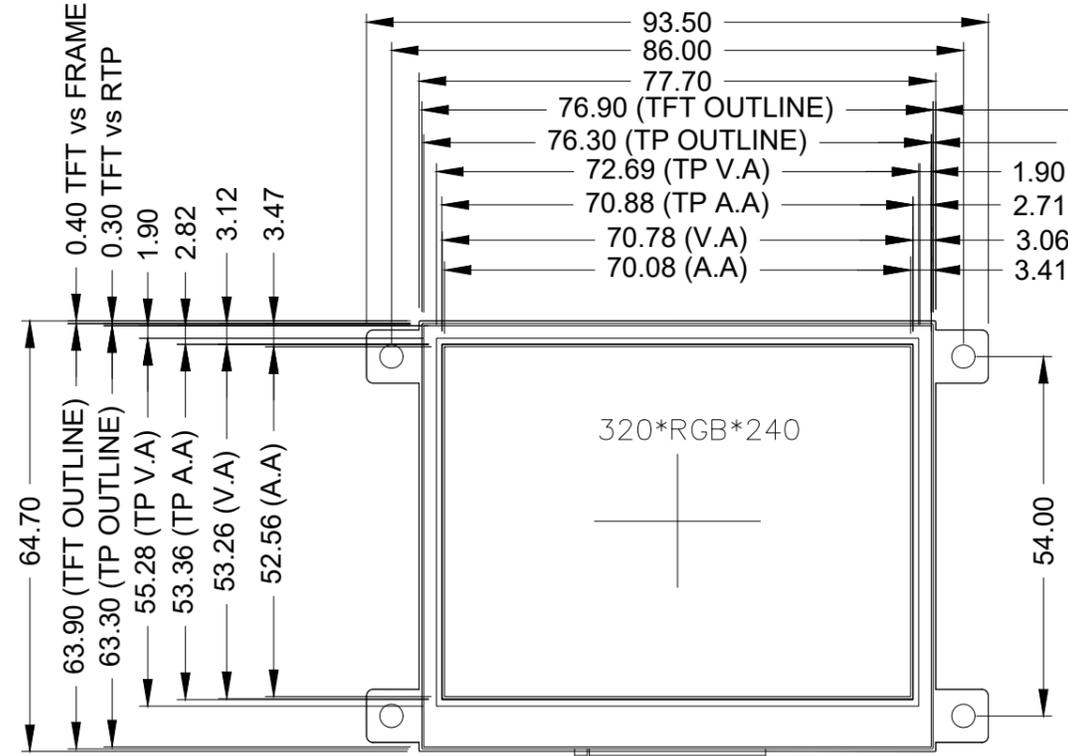

- NOTES:
- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
  - OPERATING VOLTAGE: VDD=3.3V
  - VIEWING DIRECTION: 12 O'CLOCK
  - IC CONTROLLER: FT800
  - OPERATING TEMP.: -20°C ~ 70°C
  - STORAGE TEMP.: -30°C ~ 80°C
  - LED BACKLIGHT: 6-LED WHITE, BUILT-IN INVERTER
  - SURFACE LUMINANCE: 450 cd/m<sup>2</sup>
  - GENERAL TOLERANCE: ±0.2
  - RoHS COMPLIANT

1.1	Dimension overhaul	2018.10.22
1.0	Initial case	2015.01.05
Ver.	DESCRIPTION	DATE

CUSTOMER		DATE	2018.10.22
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	RVT3.5B320240CFWR00	
ENGR CHK	mm	MODEL	
APPROVAL		DWG NO	
RIVERDI		Rev. 1.1	PAGE
			1/1