




PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

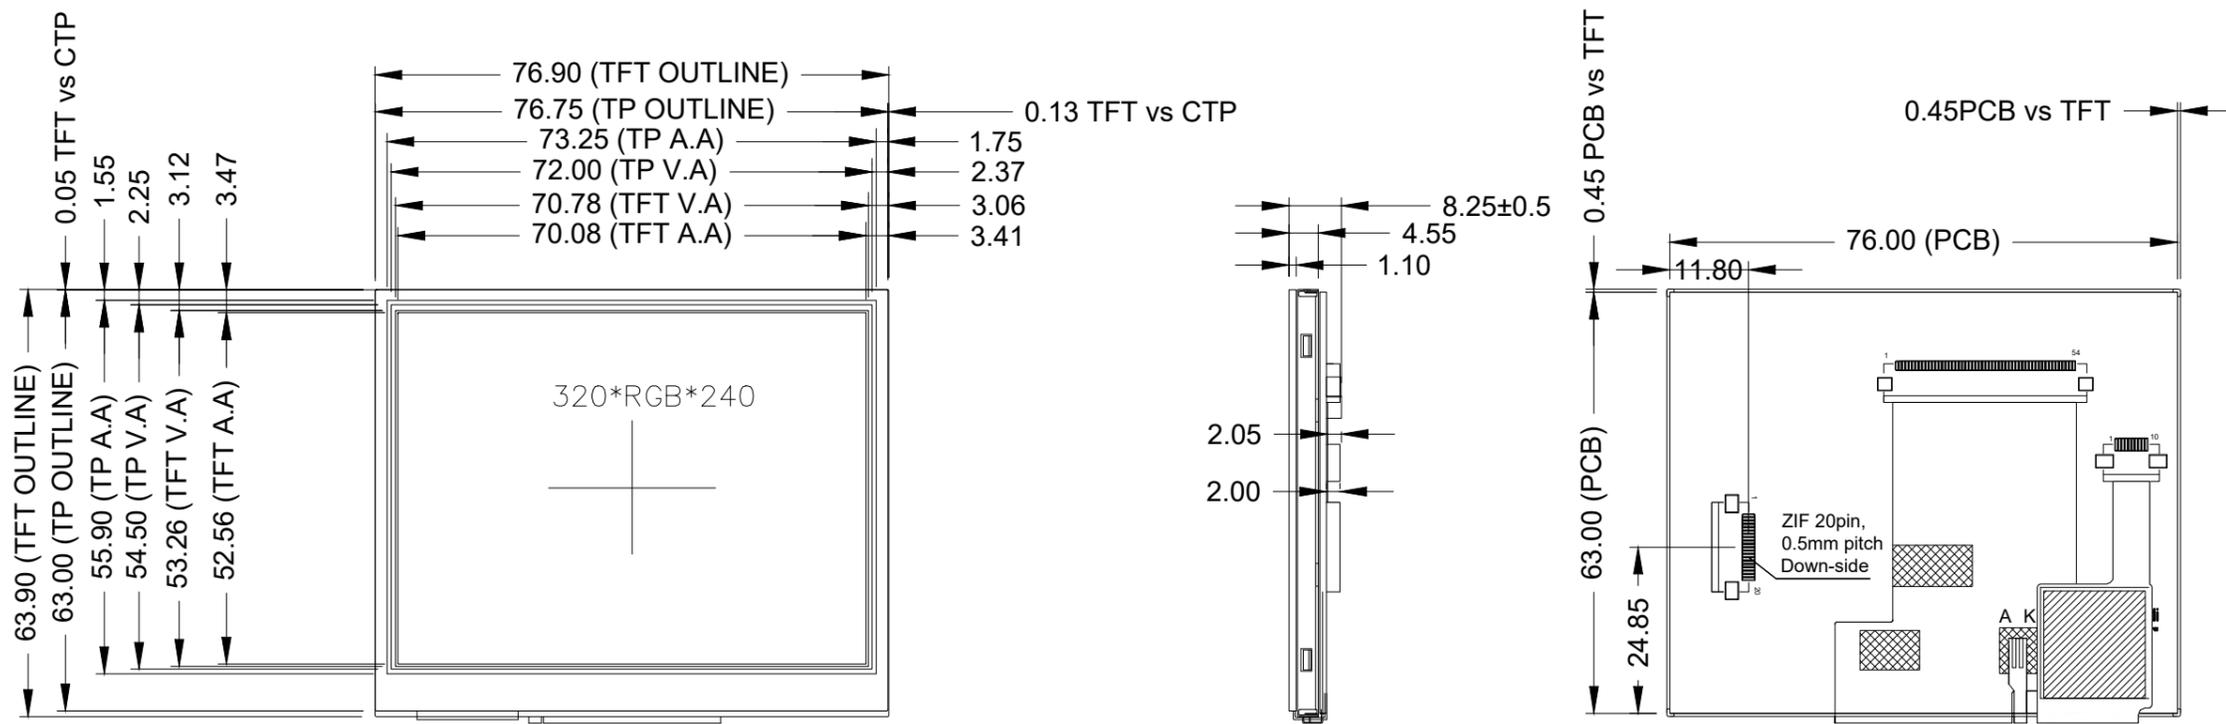

INTERNAL BACKLIGHT LED CONNECTION

- NOTES:
- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
 - OPERATING VOLTAGE: VDD=3.3V
 - VIEWING DIRECTION: 12 O'CLOCK
 - IC CONTROLLER: FT801
 - OPERATING TEMP.: -20°C ~ 70°C
 - STORAGE TEMP.: -30°C ~ 80°C
 - LED BACKLIGHT: 6-LED WHITE, BUILT-IN INVERTER
 - SURFACE LUMINANCE: 480 cd/m²
 - GENERAL TOLERANCE: ±0.2
 - RoHS COMPLIANT

1.1	Dimension overhaul	2018.10.22
1.0	Initial case	2014.12.23
Ver.	DESCRIPTION	DATE

CUSTOMER		DATE	2018.10.22
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	RVT3.5B320240CNWC81	
ENGR CHK	mm	MODEL	
APPROVAL		MODEL	
RIVERDI		DWG NO	PAGE
		Rev. 1.1	1/1