



PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

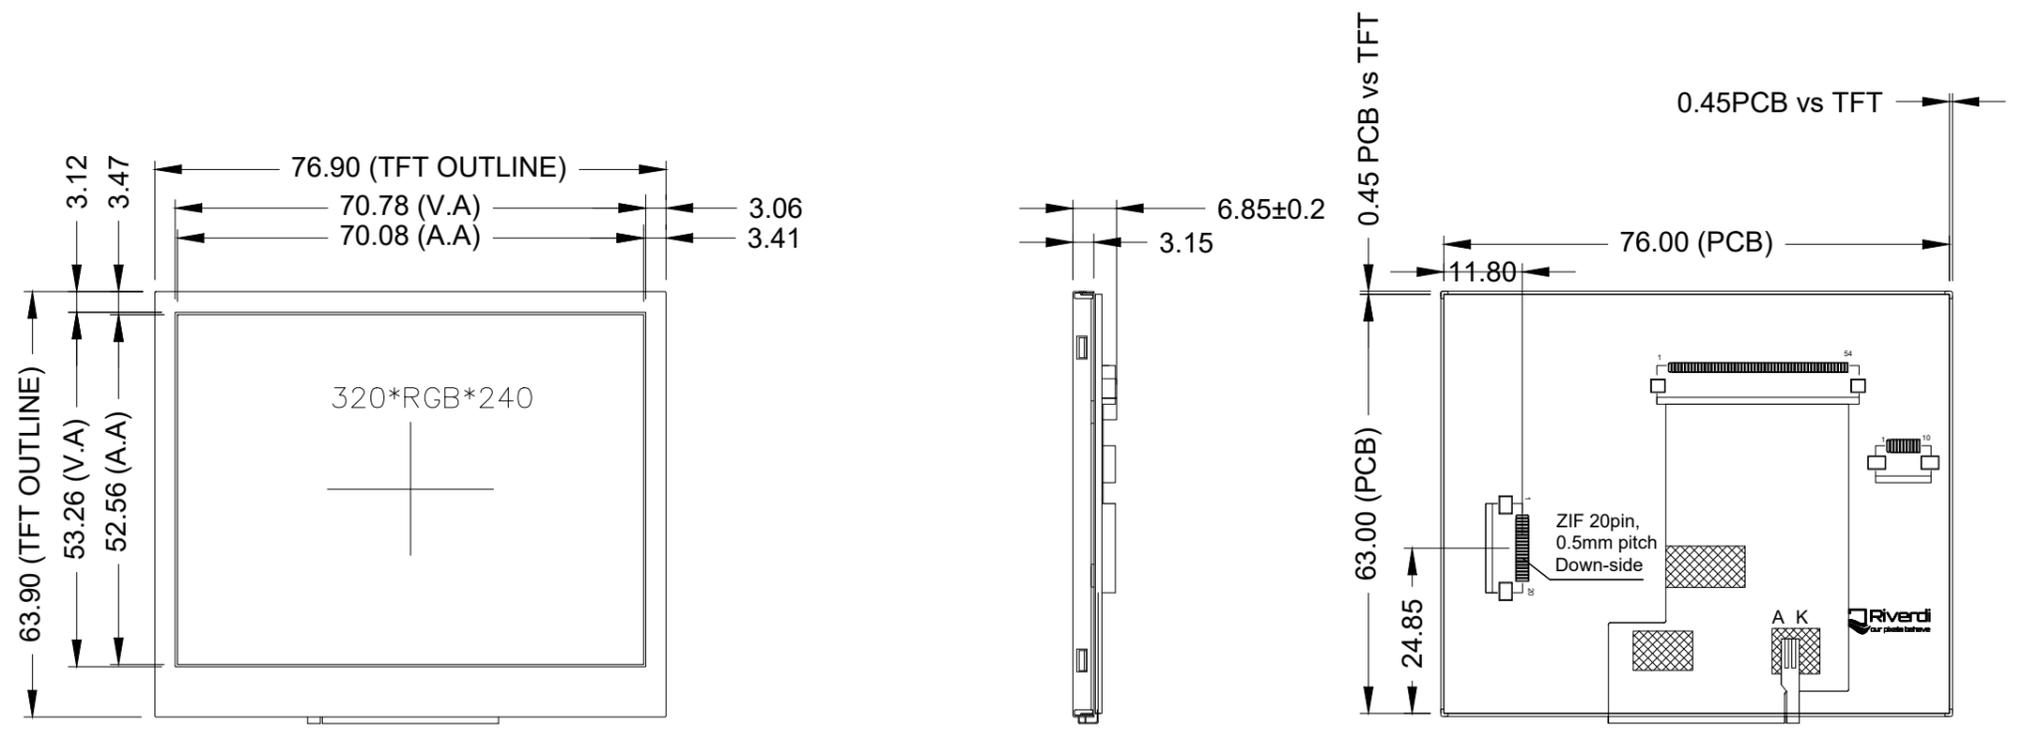

INTERNAL BACKLIGHT LED CONNECTION

- NOTES:
- 1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
  - 2. OPERATING VOLTAGE: VDD=3.3V
  - 3. VIEWING DIRECTION: 12 O'CLOCK
  - 4. IC CONTROLLER: FT800
  - 5. OPERATING TEMP.: -20°C ~ 70°C
  - 6. STORAGE TEMP.: -30°C ~ 80°C
  - 7. LED BACKLIGHT: 6-LED WHITE, BUILT-IN INVERTER
  - 8. SURFACE LUMINANCE: 500 cd/m<sup>2</sup>
  - 9. GENERAL TOLERANCE: ±0.2
  - 10. RoHS COMPLIANT

1.1	Dimension overhaul	2018.10.22
1.0	Initial case	2014.12.23
Ver.	DESCRIPTION	DATE

CUSTOMER		DATE	2018.10.22
DRAWN		SCALE	TITLE
DFTG CHK		UNIT	RVT3.5B320240CNWN00
ENGR CHK		mm	MODEL
APPROVAL			
<b>RIVERDI</b>			DWG NO
			Rev. 1.1
		PAGE	1/1