
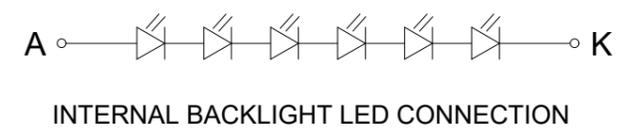
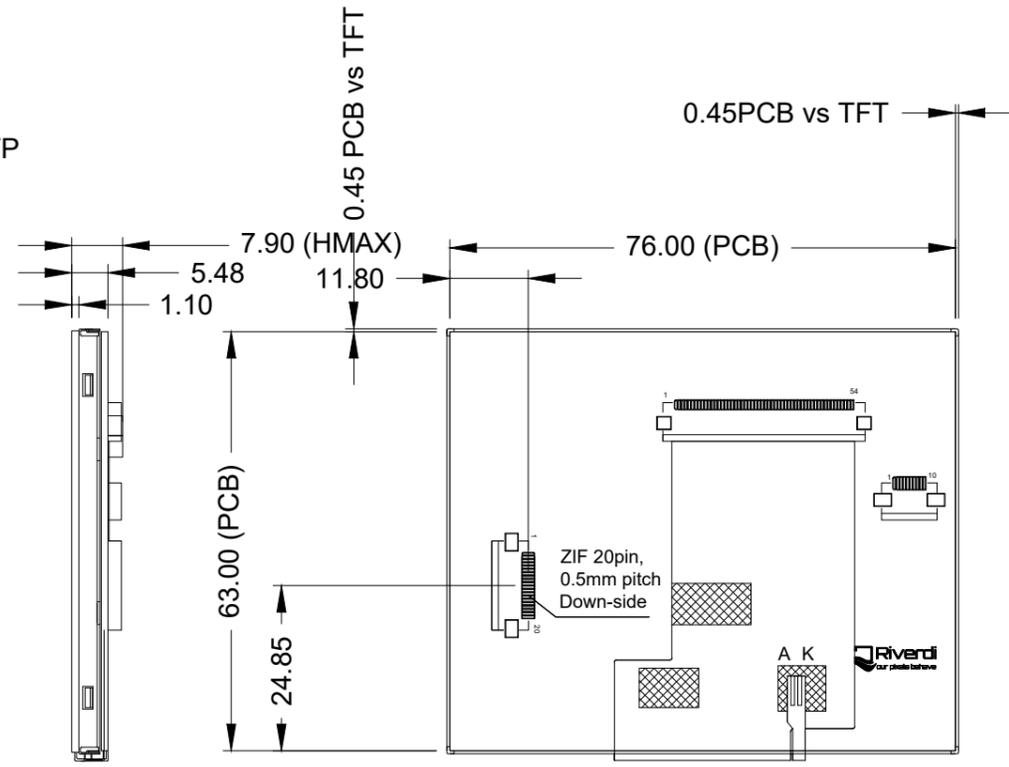


PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

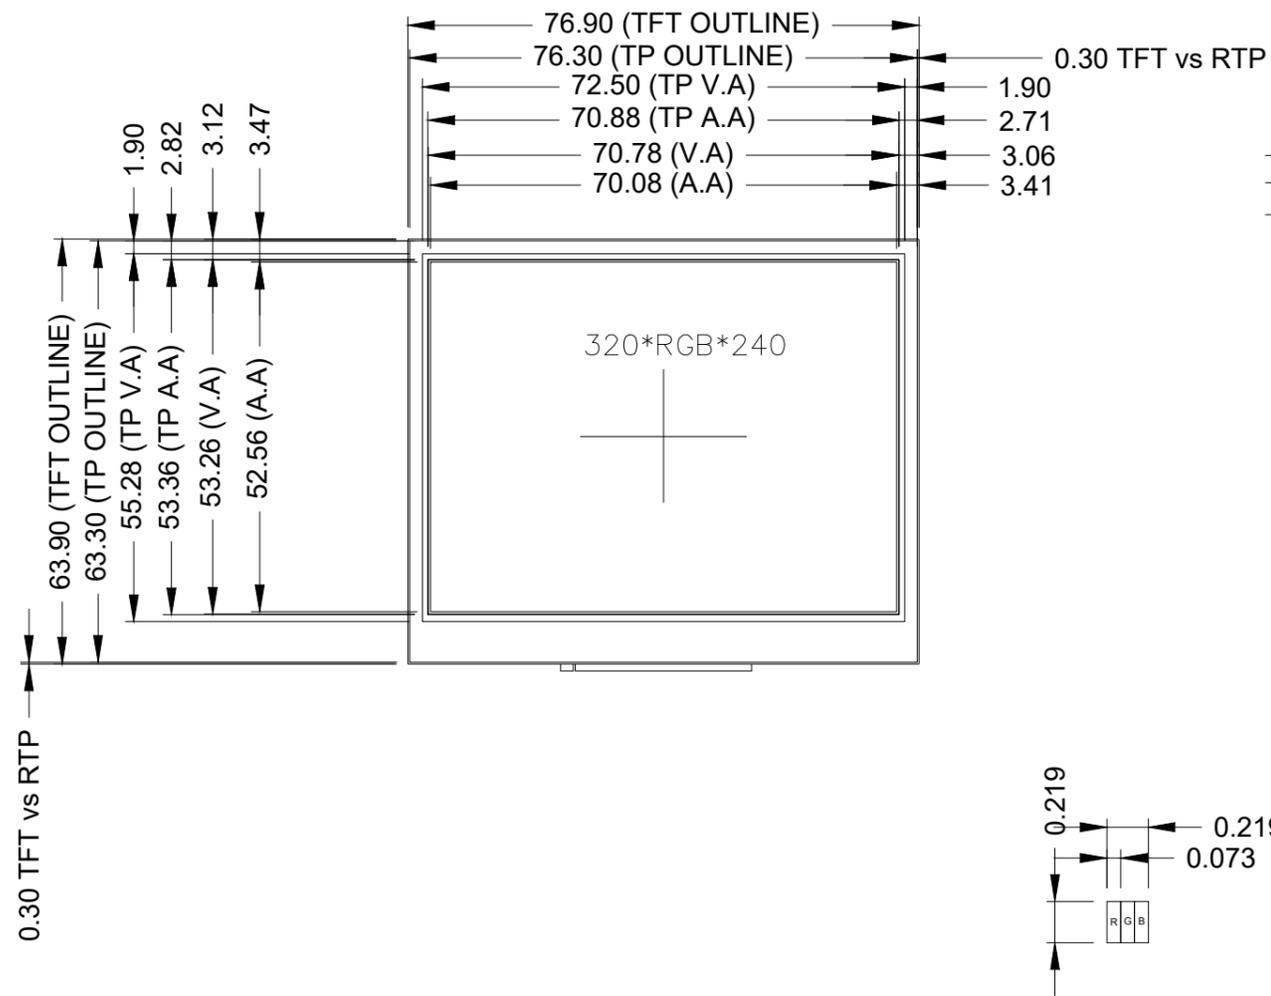

- NOTES:**
- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
 - OPERATION VOLTAGE: VDD=3.3V
 - VIEWING DIRECTION: 12 O'CLOCK
 - IC CONTROLLER: FT800
 - OPERATING TEMP.: -20°C ~ 70°C
 - STORAGE TEMP.: -30°C ~ 80°C
 - LED BACKLIGHT: 6-LED WHITE, BUILT-IN INVERTER
 - SURFACE LUMINANCE: 450 cd/m²
 - GENERAL TOLERANCE: ±0.2
 - RoHS COMPLIANT
 - BLGND internally connected to GND

CUSTOMER APVL		DATE	2015-01-05
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	RVT3.5B320240CNWR00	
ENGR CHK	mm	MODEL	
APPROVAL		MODEL	
		DWG NO	PAGE
			1/1