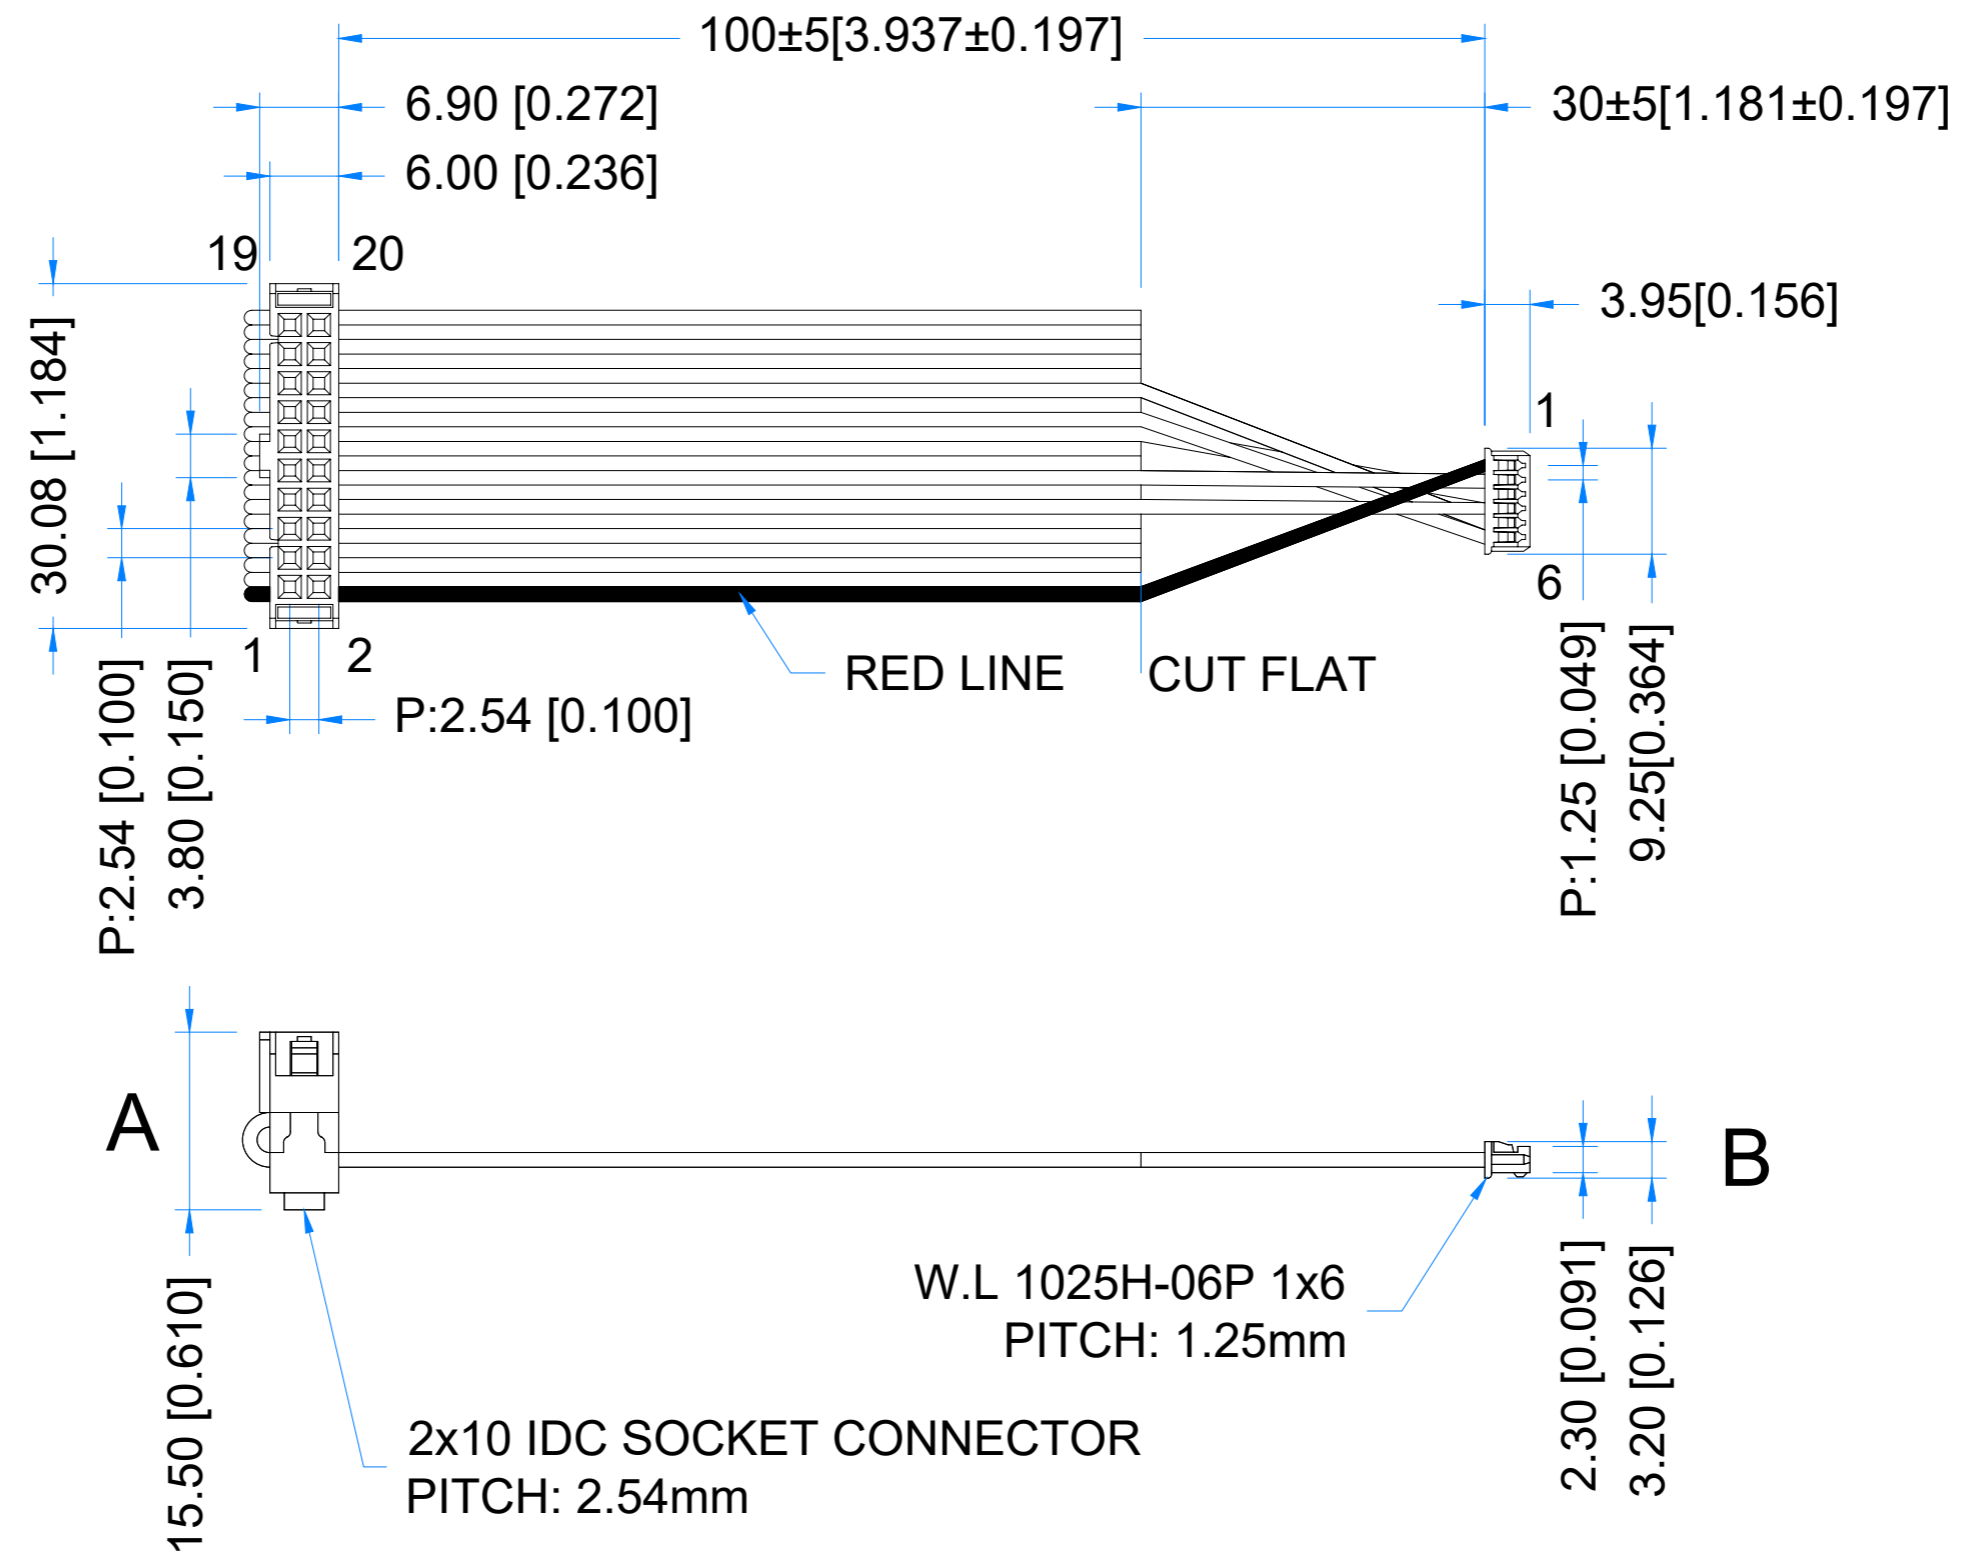




Revision:	Changes:	Date:
1.0	Initial Case	2023.06.05



PINOUT ON THE 2ND PAGE

- GENERAL NOTES:**
- Connector A: 2x10pins, 2.54mm pitch, female, IDC socket
  - Connector B: 1x6 pins, 1.25mm pitch, female, Molex connector  
PN of Connector B: 51021-0600 or alternative
  - Ribbon Cable: UL2651 28AWG, 1.27mm pitch, 20 core

PN: RVA-SWD-06M-C100_V2			
SN:			
DRAWN: M.Natywa	2023.06.05	1:0.66	
CHECKED: Carol Gao	2023.06.06	[mm]	
APPR:		ISO A3	



PIN ASSIGNMENT			
Connector A	Pin Function	Connector B	Note
1	VCC_3.3V	1	RED
2	/		CUT FLAT
3	/		
4	/		
5	/		
6	/		
7	SW_DIO	4	GRAY
8	/		CUT FLAT
9	SW_CLK	2	GRAY
10	/		CUT FLAT
11	/		
12	GND	3	GRAY
13	SWO	6	GRAY
14	/		CUT FLAT
15	RST	5	GRAY
16	/		CUT FLAT
17	/		
18	/		
19	/		
20	/		