
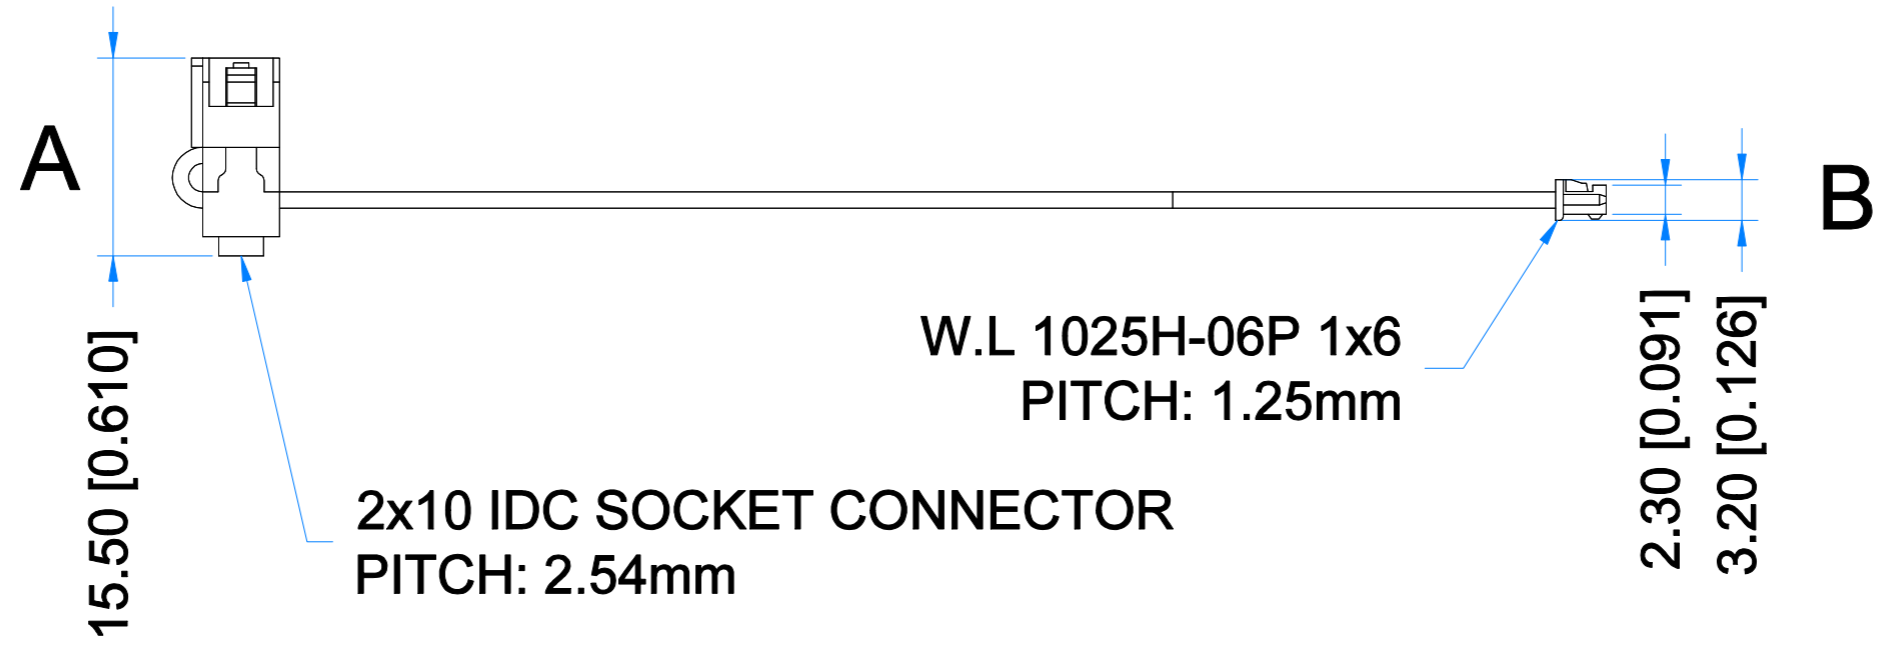



Revision:	Changes:	Date:
1.0	Initial Case	2022.03.10

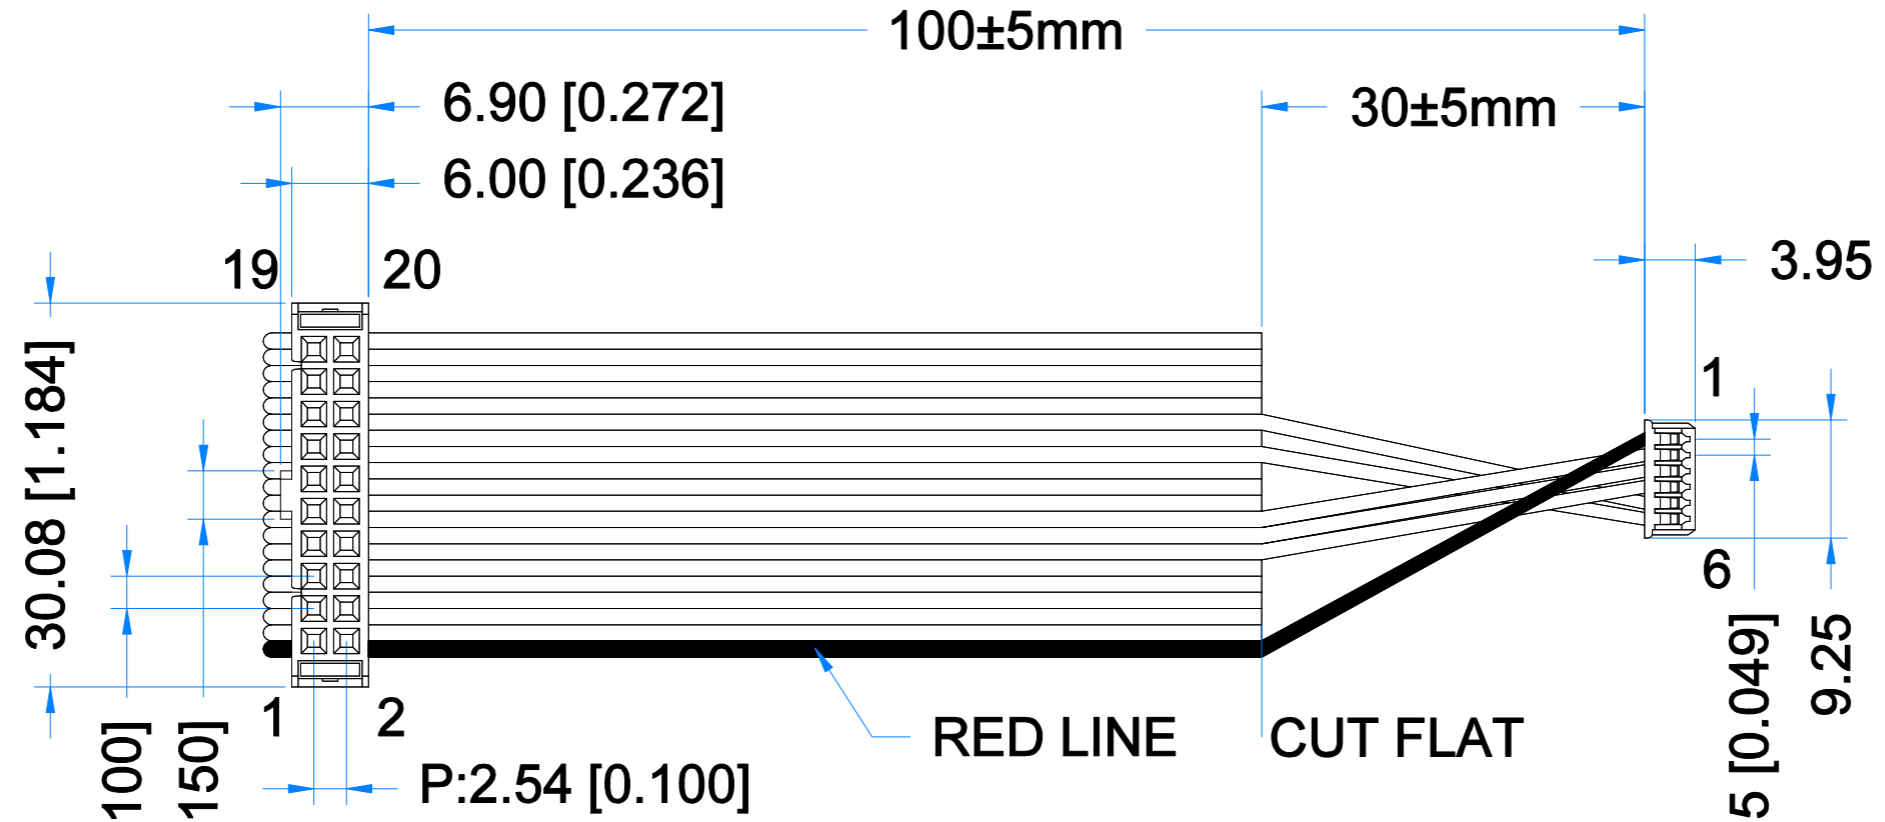

PINOUT ON THE 2ND PAGE

- GENERAL NOTES:**
- Connector A: 2x10pins, 2.54mm pitch, female, IDC socket
 - Connector B: 1x6 pins, 1.25mm pitch, female, Molex connector
PN of Connector B: 51021-0600 or alternative
 - Ribbon Cable: UL2651 28AWG, 1.27mm pitch, 20 core

PN: RVA-SWD-06M-C100		
SN:		
DRAWN: M.Natywa	2022.03.01	1:0.59
CHECKED: Carol Gao	2022.03.10	[mm]
APPR: Carol Gao	2022.03.10	ISO A3
		P. 1 of 1



PIN ASSIGNMENT			
Connector A	Pin Function	Connector B	Note
1	VCC_3.3V	1	RED
2	/		CUT FLAT
3	/		
4	/		
5	/		
6	/		
7	SW_DIO	4	GRAY
8	GND	3	GRAY
9	SW_CLK	2	GRAY
10	/		CUT FLAT
11	/		
12	/		
13	SWO	6	GRAY
14	/		CUT FLAT
15	RST	5	GRAY
16	/		CUT FLAT
17	/		
18	/		
19	/		
20	/		