
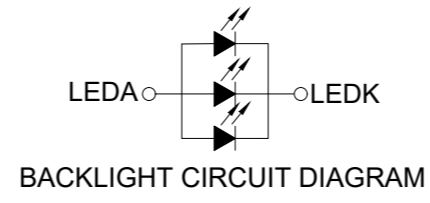
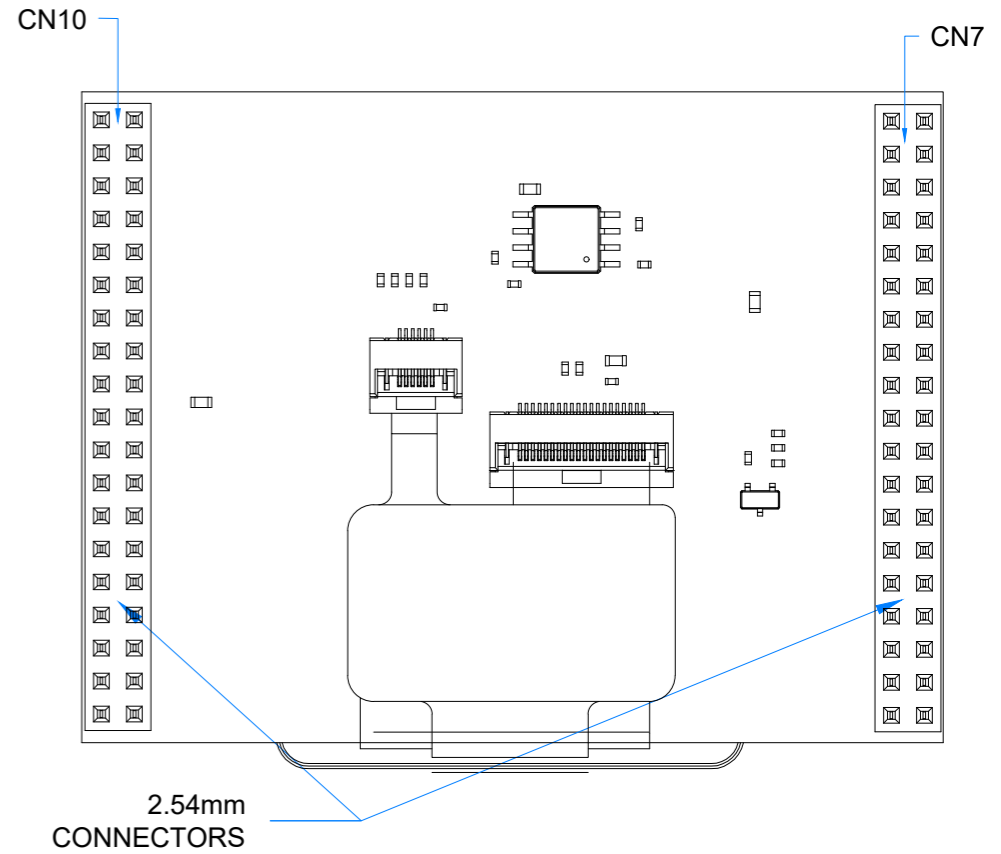
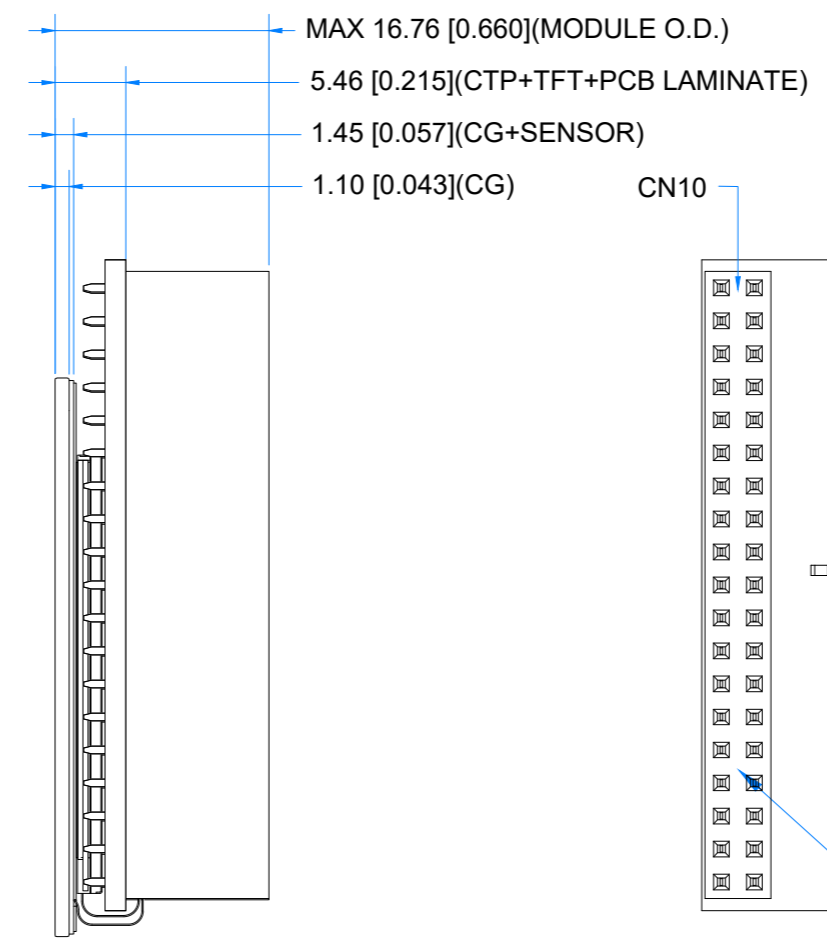


Revision:	Changes:	Date:
1.0	Initial Case	2026.05.26

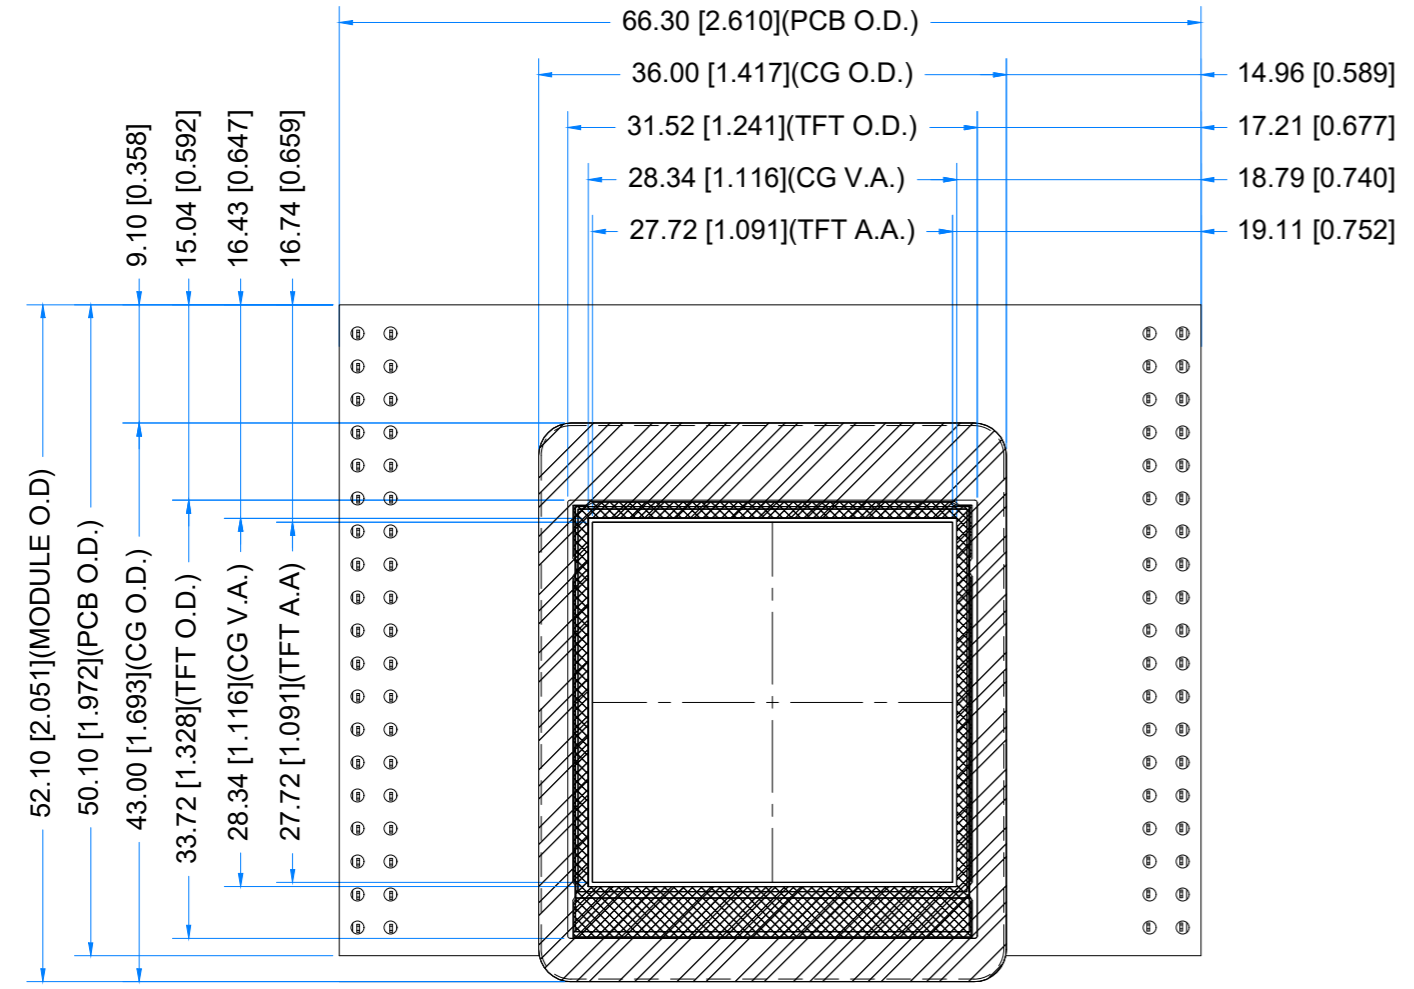

TFT NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. RESOLUTION: 240*240
3. VIEWING ANGLE: FREE
4. DRIVER IC: ST7789P3
5. OPERATING VOLTAGE: $V_{DD}=2.8V$
6. SURFACE LUMINANCE: $750cd/m^2$
7. BACKLIGHT: 3 WHITE LEDS, $V_f=2.9V$, $I_f=60mA$

TP NOTES:

1. TP STRUCTURE: GFF
2. CG THICKNESS: 1.10mm
3. DRIVER IC: ILI2130
4. SURFACE HARDNESS: $\geq 6H$
5. TRANSMITTANCE: $>85\%$

GENERAL NOTES:

1. OPERATING TEMPERATURE: $-20^{\circ}C \sim 70^{\circ}C$
2. STORAGE TEMPERATURE: $-30^{\circ}C \sim 80^{\circ}C$
3. WITHOUT INDIVIDUAL TOLERANCE: $\pm 0.2mm$
4. RoHS COMPLIANT

PN: RVA15MD-NUC64A V2			
SN:			
DRAWN: M.Stabinski	2026.05.26	1:0.58	
CHECKED: K. Szymanski	2026.05.26	[mm]	
APPR: A. Demko-Karolczuk	2026.05.26	ISO A3	