
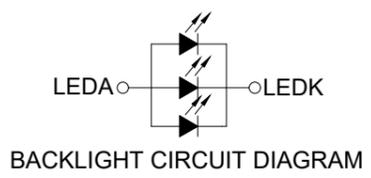
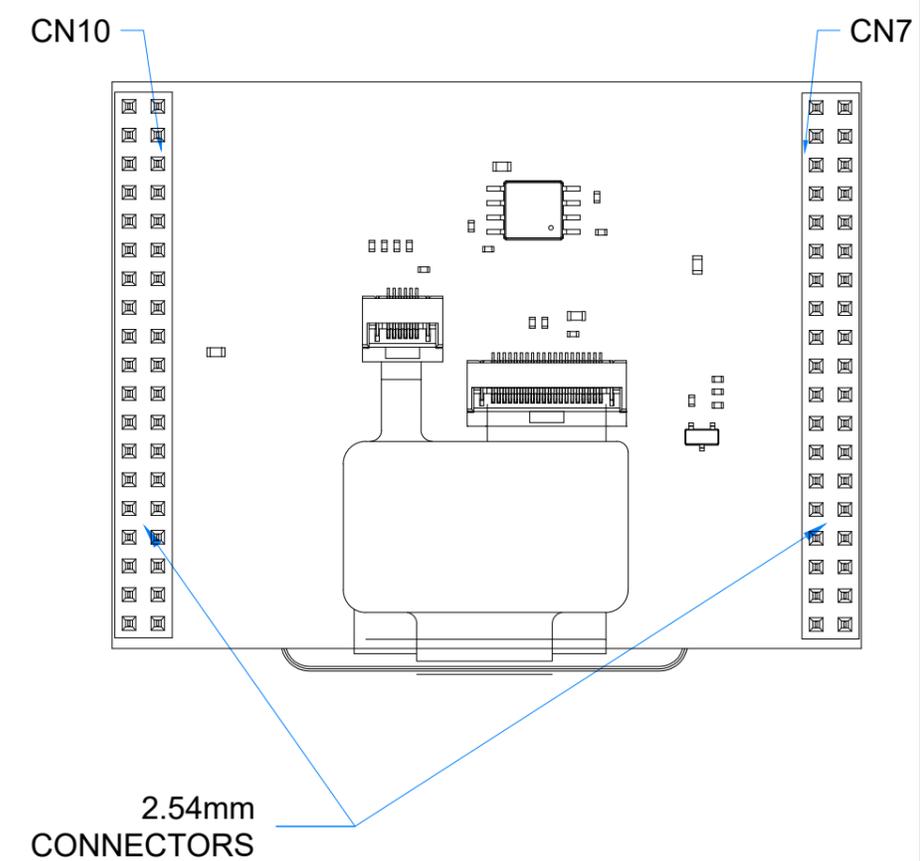
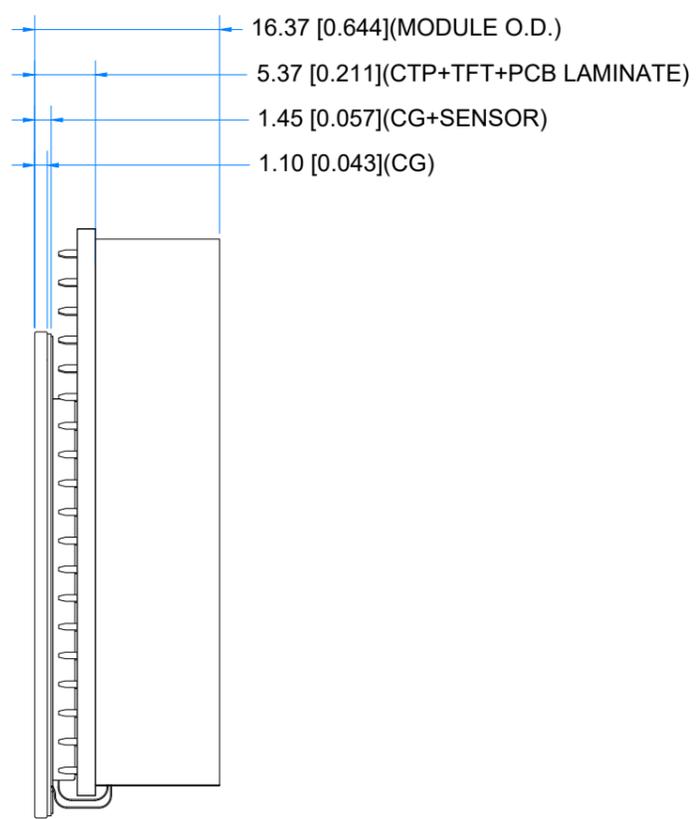


Revision:	Changes:	Date:
1.0	Initial Case	2024.10.21
1.1	Part Number Update	2025.01.14
1.2	Changed Pin Headers, PCBA Changes	2025.10.10

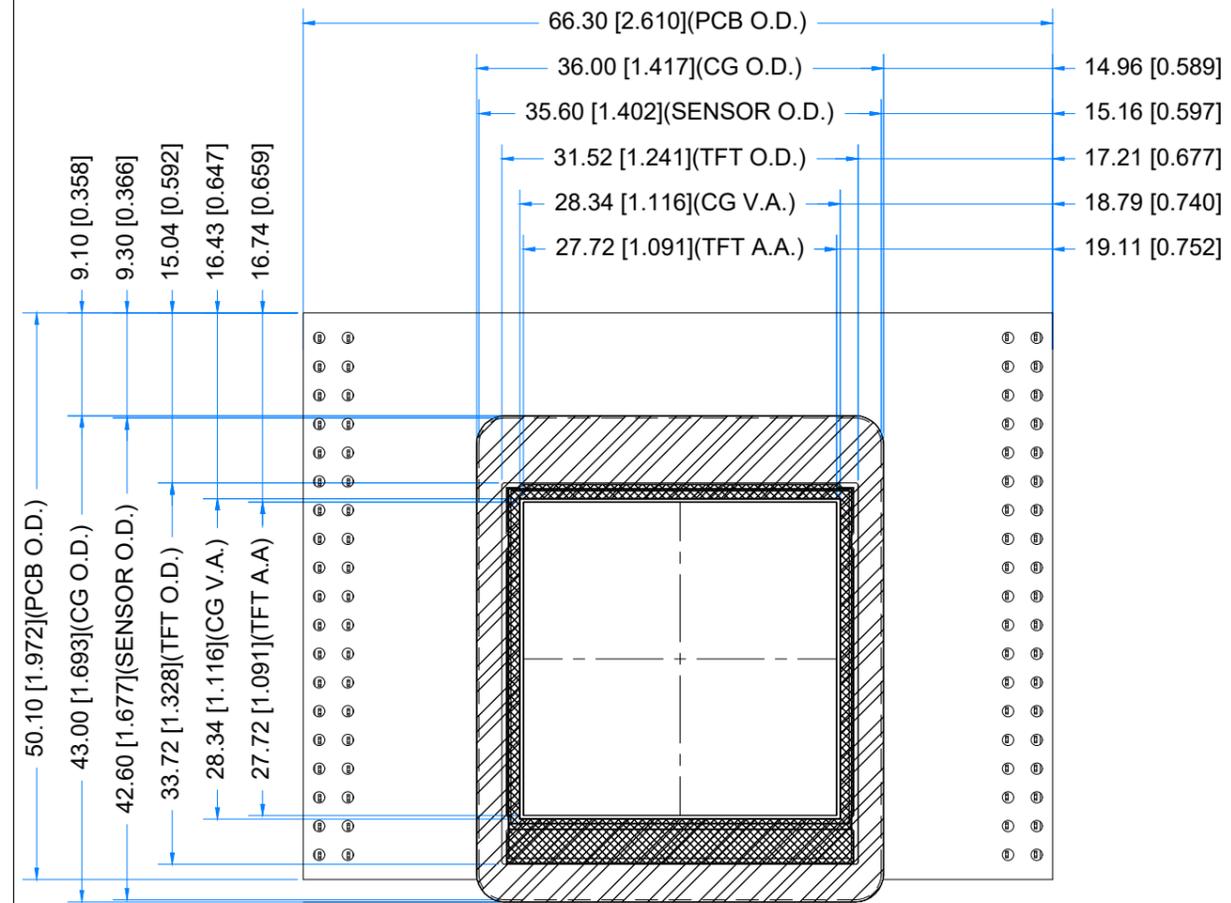

TFT NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. RESOLUTION: 240*240
3. VIEWING ANGLE: FREE
4. DRIVER IC: ST7789
5. OPERATING VOLTAGE: V_{cc}=2.8V
6. SURFACE LUMINANCE: 500cd/m²
7. BACKLIGHT: 3LEDS, V_f=3.2V, I_f=60mA

TP NOTES:

1. TP STRUCTURE: G+G
2. DRIVER IC: ILI2130
3. SURFACE HARDNESS: ≥6H
4. TRANSMITTANCE: >85%

GENERAL NOTES:

1. OPERATING TEMPERATURE: -20°C ~ 70°C
2. STORAGE TEMPERATURE: -30°C ~ 80°C
3. WITHOUT INDIVIDUAL TOLERANCE: ±0.2mm
4. RoHS COMPLIANT

PN: RVA15MD-NUC64A

SN:

DRAWN: M.Stabinski 2025.10.10 1:0.63

CHECKED: M.Wierzbowski 2025.10.13 [mm]

APPR:

ISO A3 P. 1 of 1