


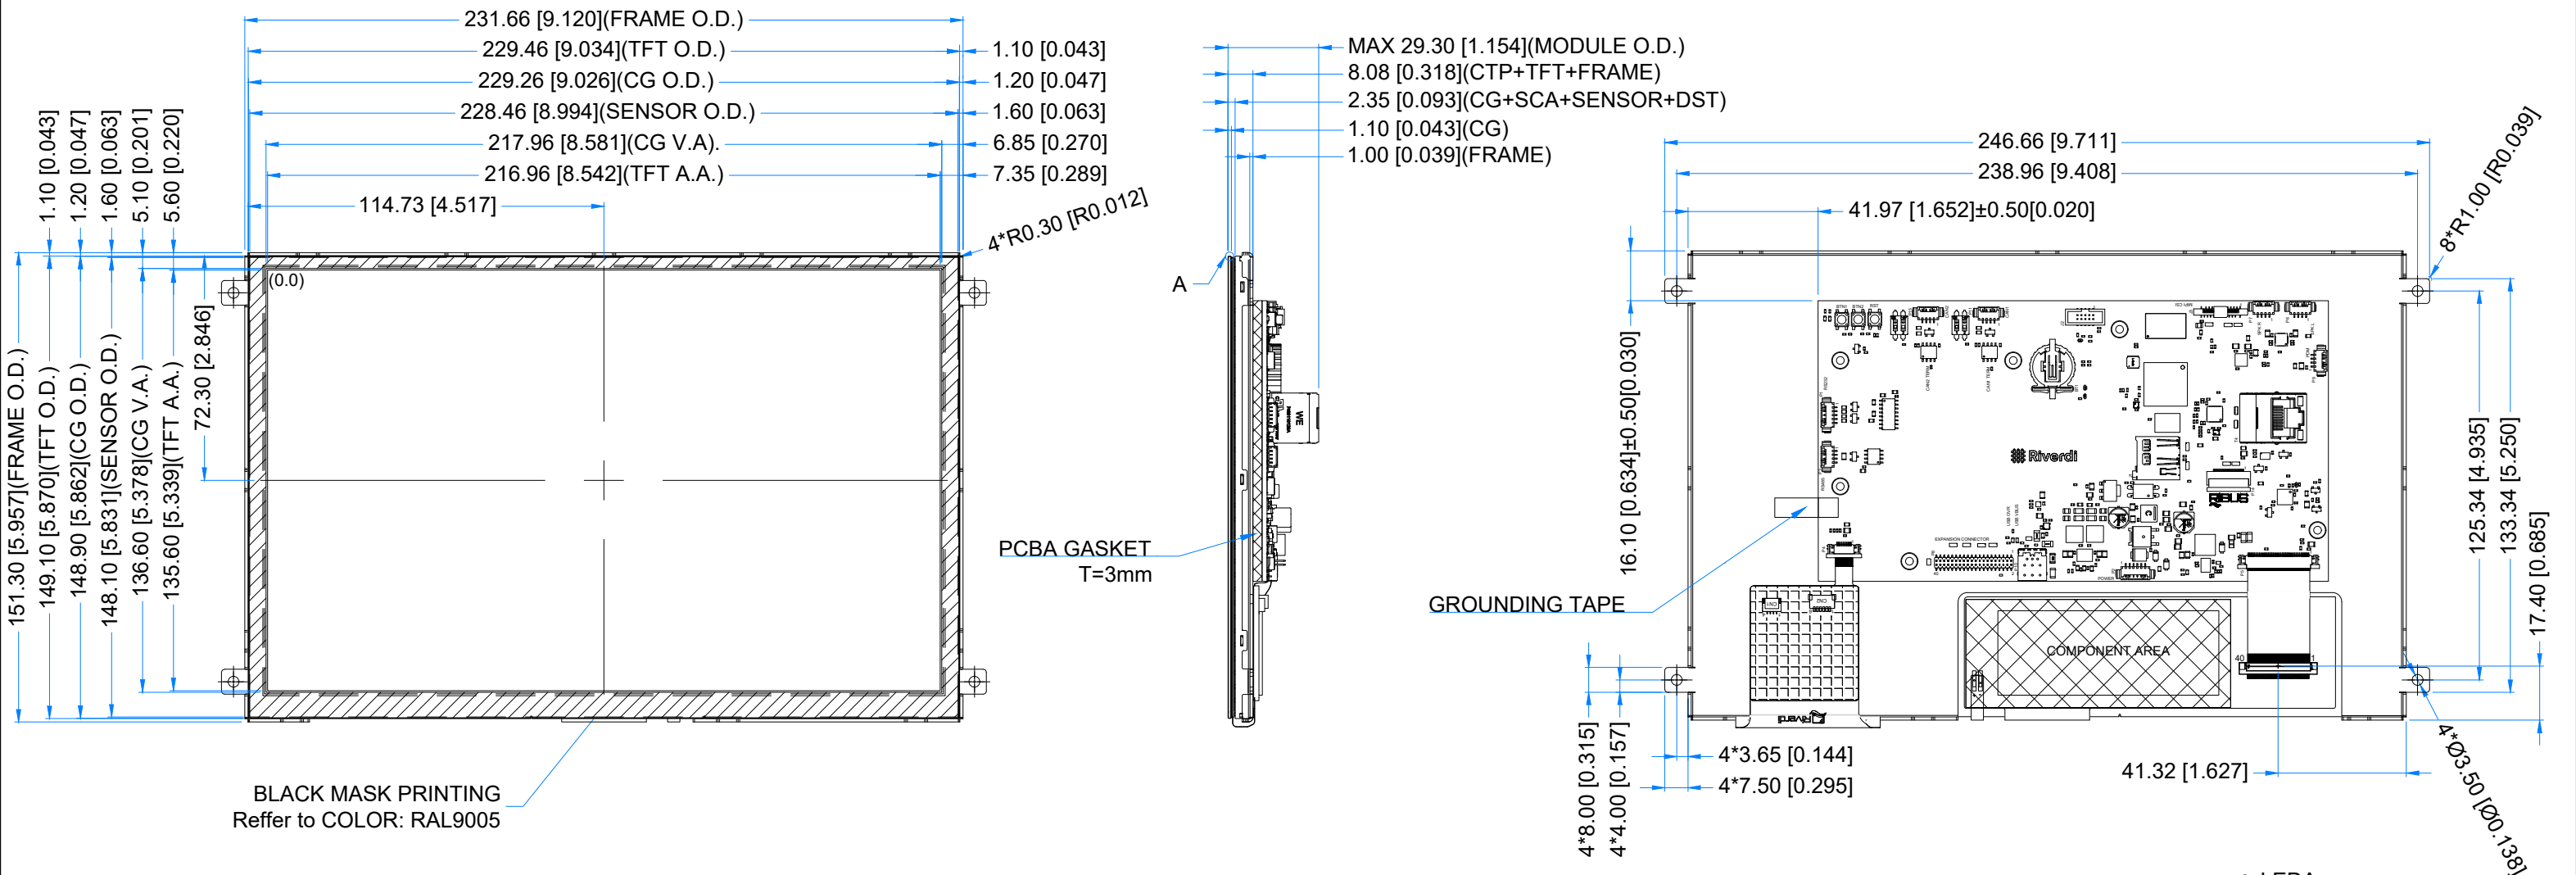

1.25 MM MOLEX CONNECTORS		
NO.	TYPE	MATE WITH
P9 (PDM)	53261-0471	51021-0400
P6 (SPK L)	53261-0471	51021-0400
P7 (SPK R)	53261-0471	51021-0400
P11 (CAN1)	53261-0471	51021-0400
P15 (CAN2)	53261-0471	51021-0400
P1 (RS232)	53261-0571	51021-0500
P3 (RS485)	53261-0471	51021-0400
P2 (POWER)	53261-0671	51021-0600

1.27 MM PIN HEADER AND SOCKET		
NO.	TYPE	MATE WITH
P8 (EXPANSION)	CH51402M100-0P	CBC1402D100 OR CBC1402M100-2P
J2 (JTAG)	20021521-00010T4LF	20021444-00010T4LF

LCD NOTES:

- 1. LCD TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS
- 2. RESOLUTION: 1280x800
- 3. VIEWING ANGLE: FREE
- 4. MCU ON THE BOARD: MIMXRT1176DVM
- 5. EXTERNAL SDRAM SIZE: 512 Mbit
- 6. EXTERNAL FLASH SIZE: 512 Mbit Octal Flash + 32 Mbit SPI Flash
- 7. SUPPLY VOLTAGE FOR MODULE: 6.5V - 36.0V

TP NOTES:

- 1. TP STRUCTURE: G+G
- 2. CG THICKNESS: 1.10mm[0.043inch]
- 3. SURFACE HARDNESS: 7H
- 4. DRIVER IC: ILI2132A
- 5. INTERFACE: CONNECTED TO MCU VIA I2C

GENERAL NOTES:

- 1. MODULE SURFACE LUMINANCE:800 cd/m^2
- 2. ZERO BAD PIXELS FOR TFT
- 3. OPERATING TEMPERATURE: -20°C ~ 70°C
- 4. STORAGE TEMPERATURE: -30°C ~ 80°C
- 5. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm
- 6. RoHS3 COMPLIANT

PN: RVT101HVNFWCA0

SN:

DRAWN: M.Stabinski2025.11.171:2.00

CHECKED: J.Teska-Adamiec2025.11.17[mm]

APPR: M.Wierzbowski2025.11.17ISO A3

P. 1 of 1