
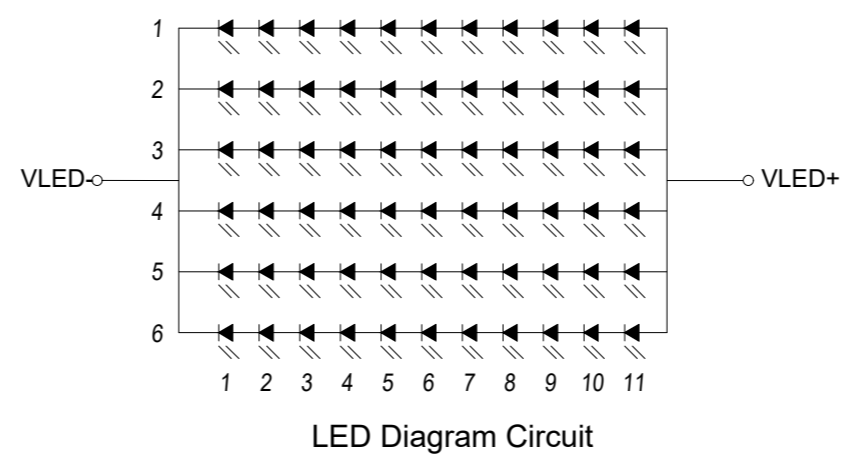
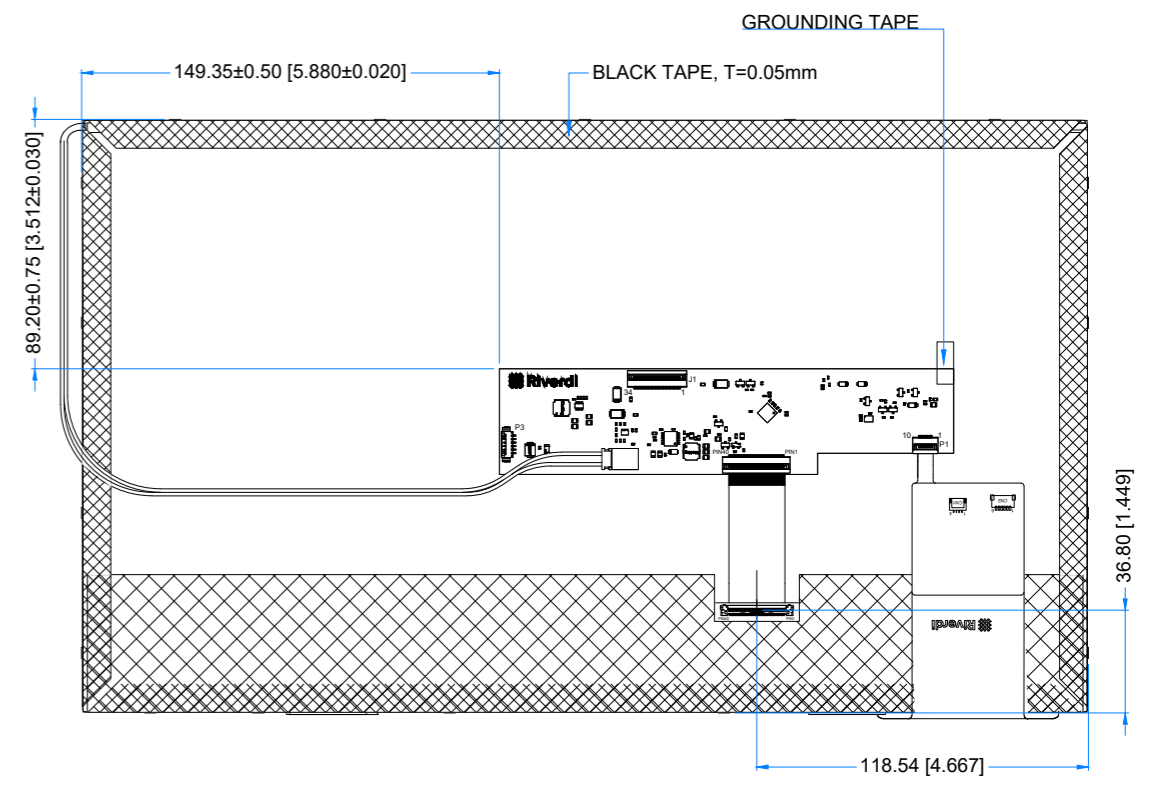
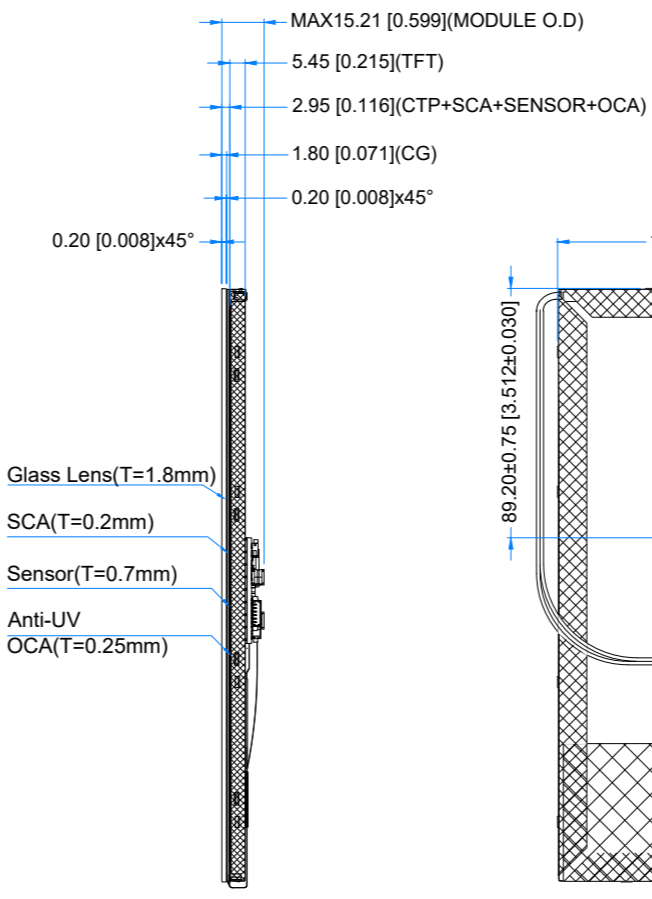


Revision:	Changes:	Date:
1.0	Initial Case	2025.06.27
1.1	Changed PCBA position	2025.09.15
1.2	PCBA Position & Tolerance Update	2026.02.02
1.3	Addition Of Grounding Tape	2026.05.06

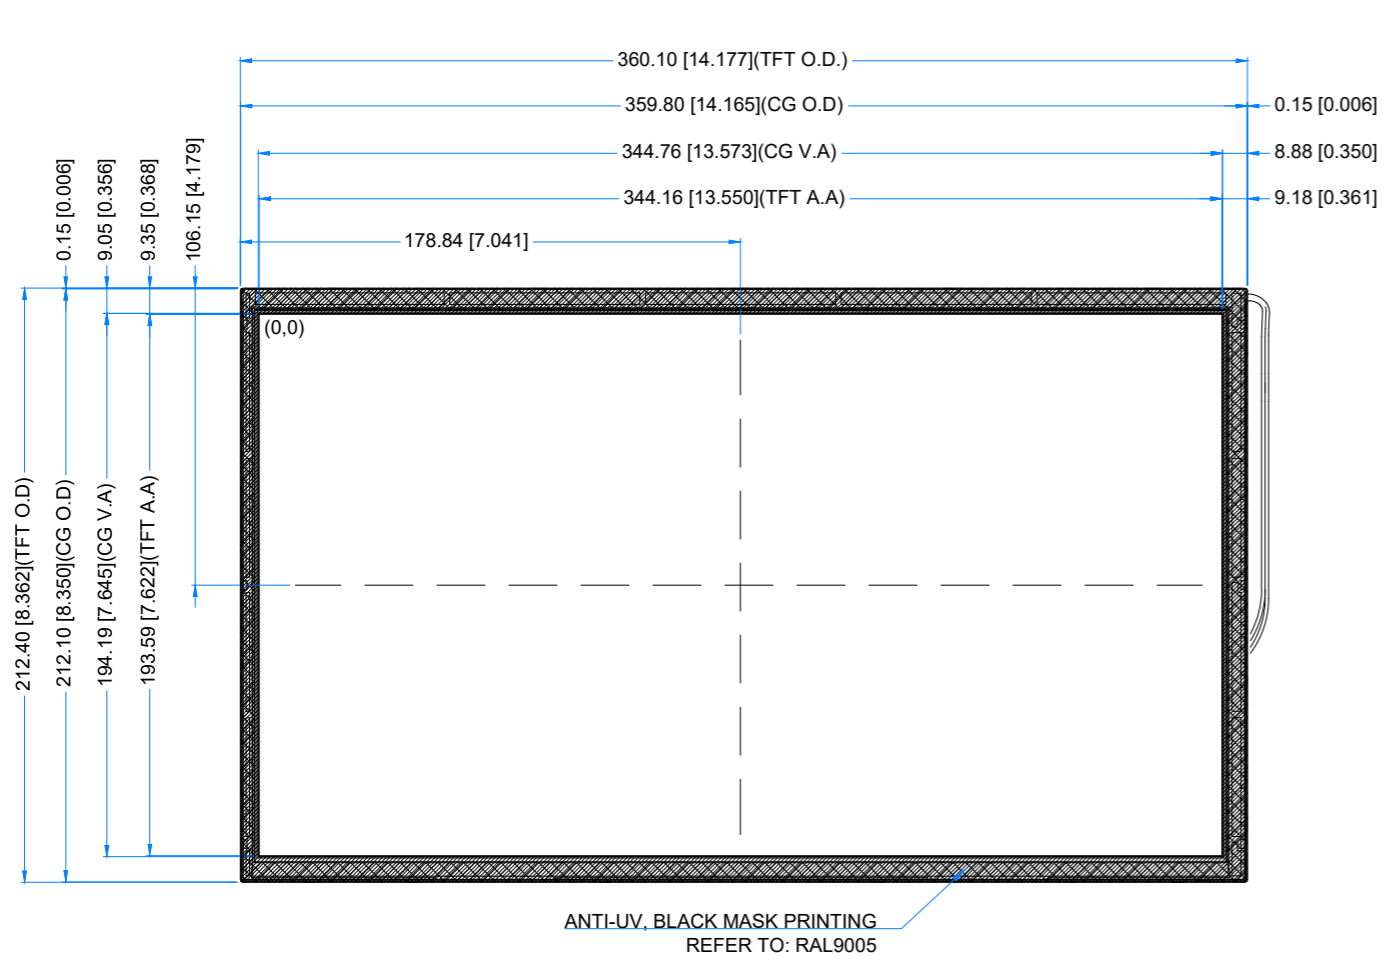

PINOUT ON THE 2ND PAGE

TFT NOTES:
 1. DISPLAY TYPE: TRANSMISSIVE, NORMALLY BLACK
 2. RESOLUTION: 1920 x 1080
 3. VIEWING ANGLE: FREE
 4. DRIVING IC ON THE BOARD: SN65DSI84ZXHR
 5. INTERFACE: MIPI DSI
 6. SUPPLY VOLTAGE FOR MODULE: 6.0V-18.0V

TP NOTES:
 1. TP STRUCTURE: G+G
 2. CG THICKNESS: 1.8mm
 3. DRIVER IC: ILI2510
 4. INTERFACE: USB, I2C
 5. OPERATING VOLTAGE: 3.3V(CTP_I2C); 5.0V (CTP_USB)

GENERAL NOTES:
 1. MODULE SURFACE LUMINANCE: 850 cd/m²
 2. OPTICAL BONDING
 3. OPERATING TEMPERATURE: -20°C ~ 70°C
 4. STORAGE TEMPERATURE: -30°C ~ 80°C
 5. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm
 6. RoHS COMPLIANT

PN: RVT156HKDNWCA0-B
 SN:
 DRAWN: M.Stabinski
 CHECKED: M.Wierzbowski
 APPR: M.Wierzbowski

2026.05.06 1:2.70
 2026.05.06 [mm]
 2026.05.06 ISO A3

P. 1 of 1



J1 CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	GND	18	PWM
2	D0_P	19	INT
3	D0_N	20	SCL
4	GND	21	SDA
5	D1_P	22	RST
6	D1_N	23	NC
7	GND	24	VREF
8	CLK_P	25	NC
9	CLK_N	26	5.0V
10	GND	27	5.0V
11	D2_P	28	5.0V
12	D2_N	29	5.0V
13	GND	30	GND
14	D3_P	31	NC
15	D3_N	32	NC
16	GND	33	NC
17	PWR_DN	34	NC

P3 CONNECTOR	
Pin No.	Desc.
1	VSUPPLY
2	VSUPPLY
3	VSUPPLY
4	VSUPPLY
5	GND
6	GND