
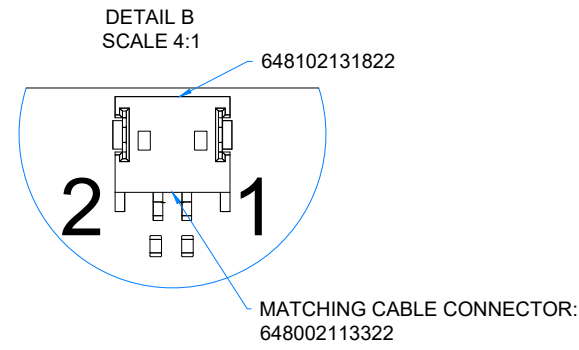
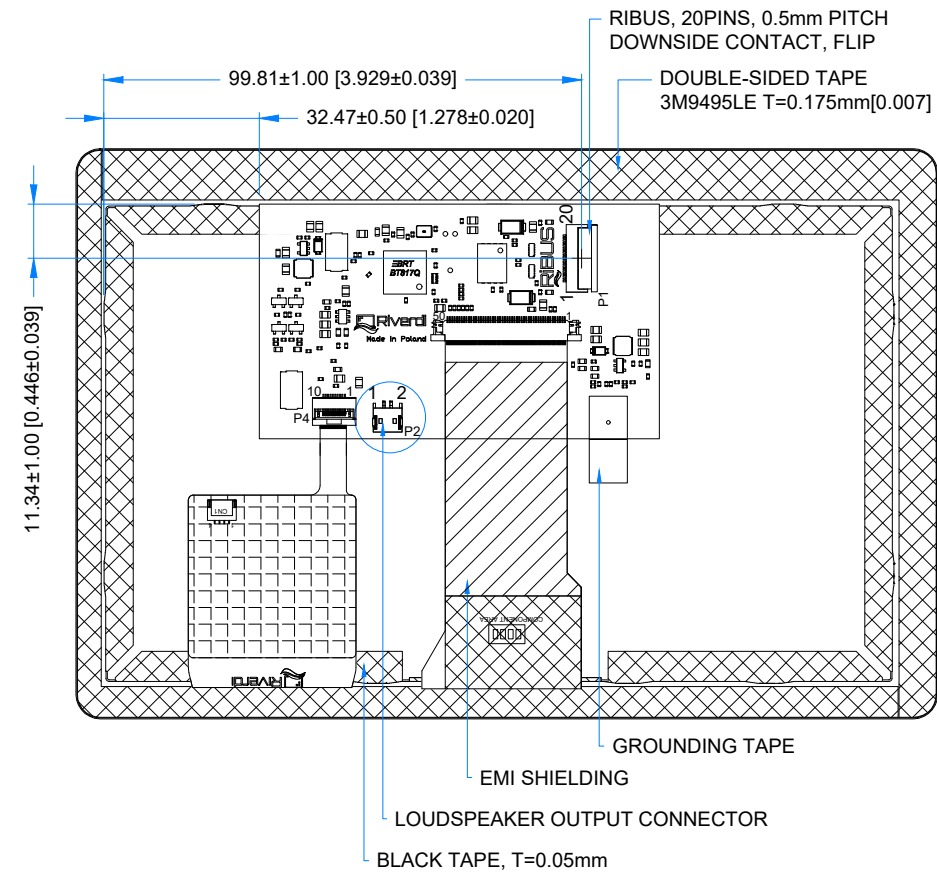
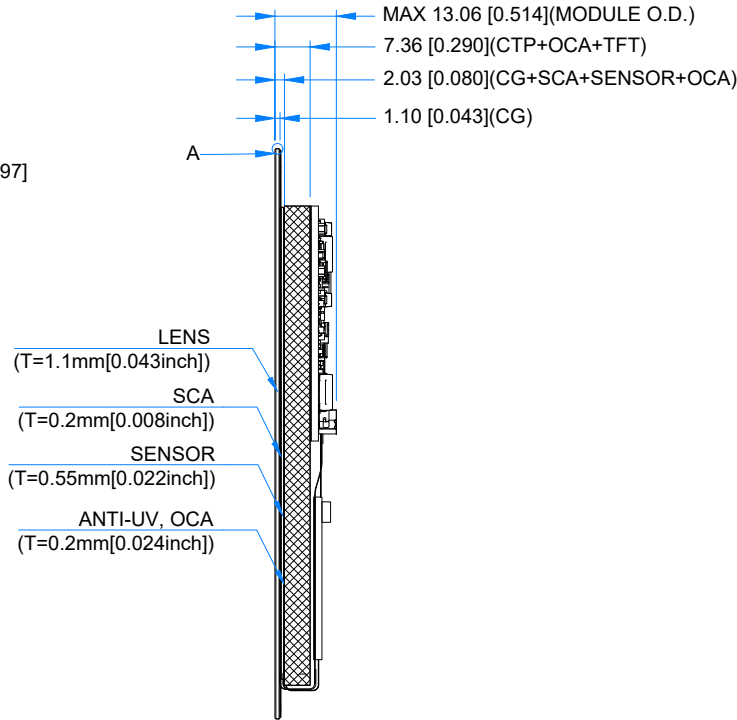


PINOUT ON THE 2ND PAGE

TFT NOTES: 1. DISPLAY TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS 2. RESOLUTION: 1024x600 3. VIEWING ANGLE: FREE 4. INTERFACE: SPI/QSPI 5. DRIVER IC ON BOARD: BT817Q 6. SUPPLY VOLTAGE FOR MODULE: 3.3V 7. SUPPLY VOLTAGE FOR BACKLIGHT: 5.0V(TYP.), BUILT-IN LED INVERTER	GENERAL NOTES: 1. TP STRUCTURE: G+G 2. CG THICKNESS: 1.10mm [0.043inch] 3. SURFACE HARDNESS: 7H 4. DRIVER IC: ILI2132A 5. INTERFACE: SPI/QSPI VIA RIBUS AND BT817Q	GENERAL NOTES: 1. OPERATING TEMPERATURE: -20°C ~ 70°C 2. STORAGE TEMPERATURE: -30°C ~ 80°C 3. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm 4. MODULE SURFACE LUMINANCE: 850cd/m² 5. RoHS COMPLIANT				
			PN: RVT70HSBNWC00-B V1.1A			
			SN:			
			DRAWN: M.Stabinski	2026.03.22	1:1.58	
			CHECKED: M.Wierzbowski	2026.03.22	[mm]	
APPR: M.Wierzbowski	2026.03.22	ISO A3	P. 1 of 1			

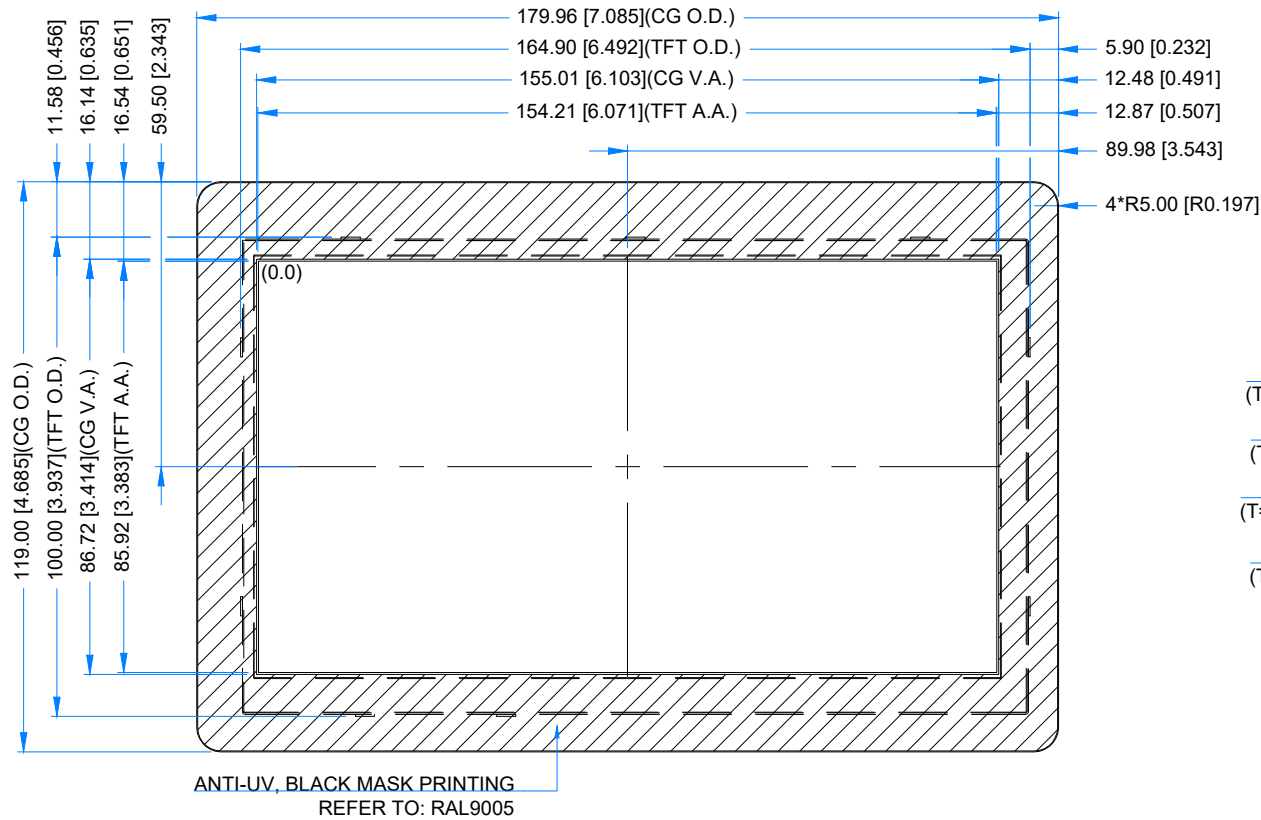

EXTERNAL KEYBOARD CONNECTOR - P6			
Pin No.	Desc.	Pin No.	Desc.
1	DOWN	2	UP
3	EXIT	4	MENU
5	PWR	6	LED_EN
7	GND	8	KEYBOARD VDD

BACKLIGHT PWM & POWER - P5			
Pin No.	Desc.	Pin No.	Desc.
1	GND	2	GND
3	EN	4	PWM
5	VDD	6	VDD