

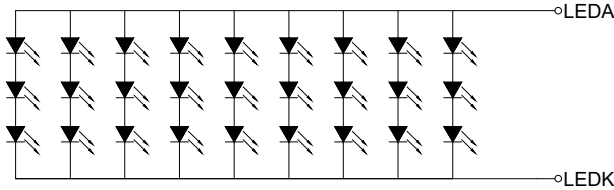
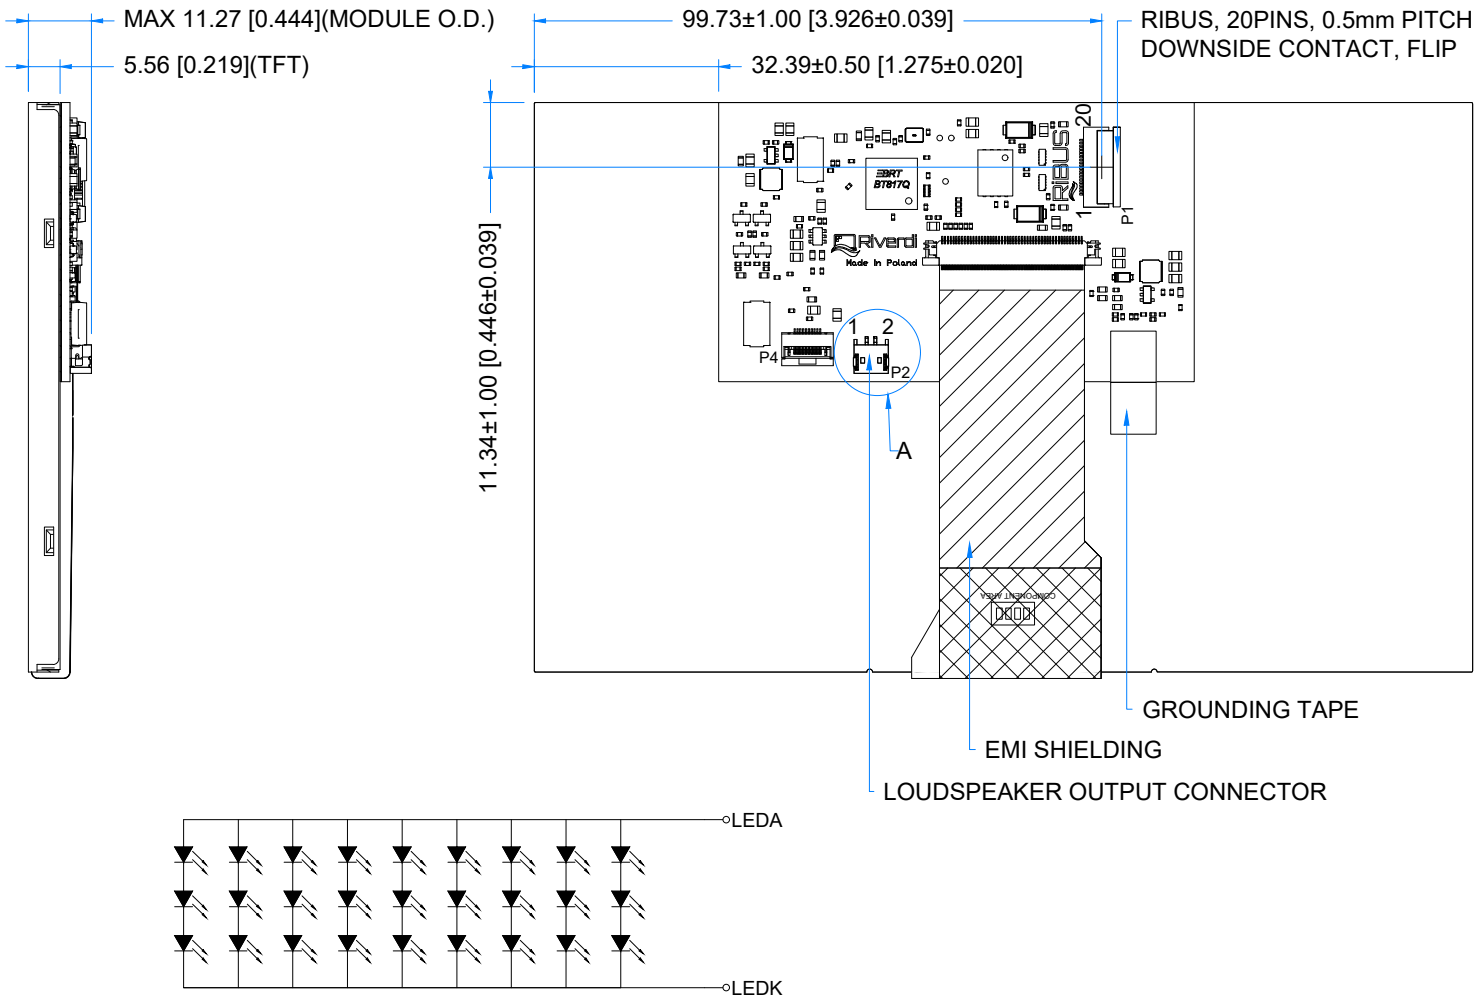
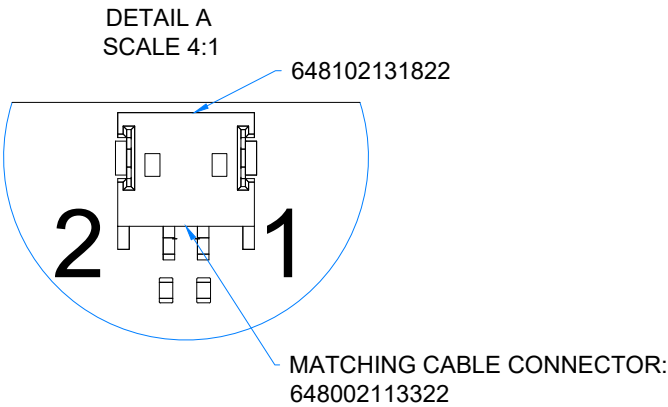


Revision:	Changes:	Date:
1.0	Initial Case	2026.03.22

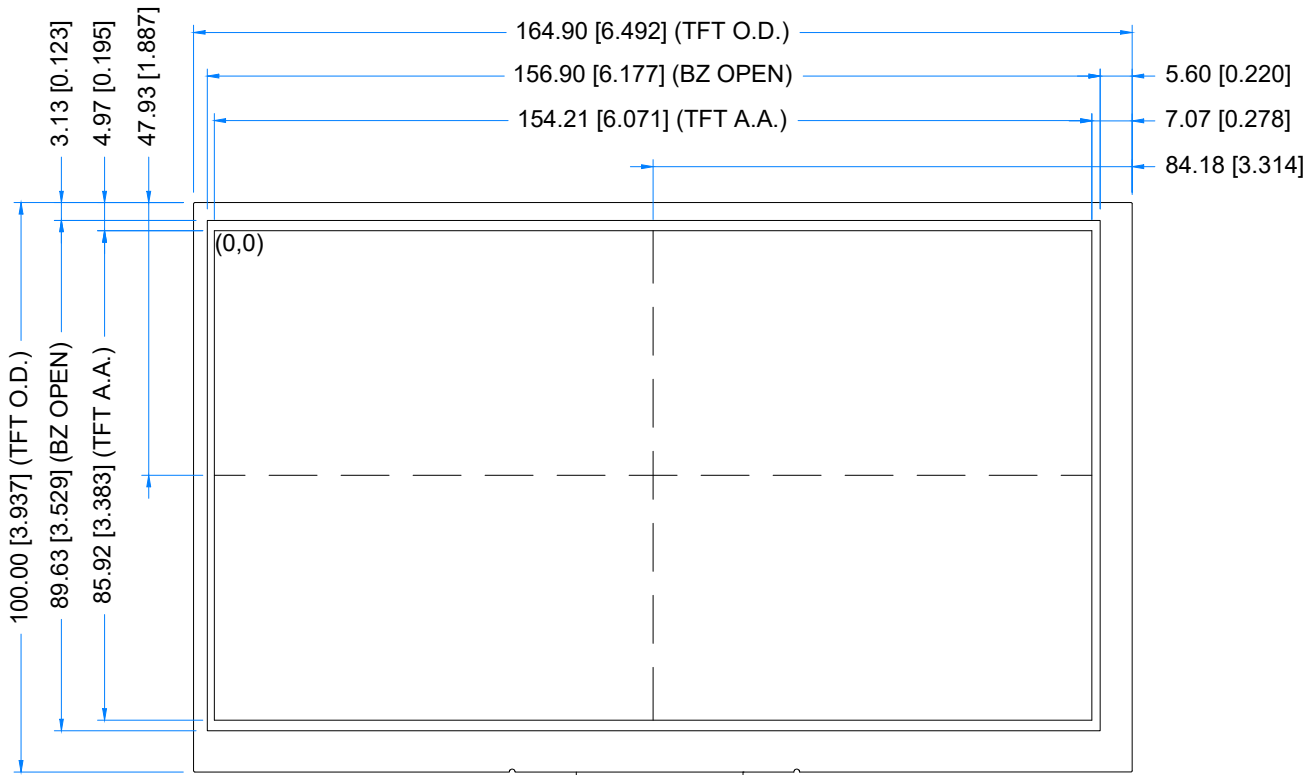

PINOUT ON THE 2ND PAGE

TFT NOTES: 1. DISPLAY TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS 2. RESOLUTION: 1024x600 3. VIEWING ANGLE: FREE 4. INTERFACE: SPI/QSPI 5. DRIVER IC ON BOARD: BT817Q 6. SUPPLY VOLTAGE FOR MODULE: 3.3V 7. SUPPLY VOLTAGE FOR BACKLIGHT: 5.0V(TYP.), BUILT-IN LED INVERTER		GENERAL NOTES: 1. MODULE SURFACE LUMINANCE: 1000cd/m ² 2. OPERATING TEMPERATURE: -20°C ~ 70°C 3. STORAGE TEMPERATURE: -30°C ~ 80°C 4. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm 5. RoHS COMPLIANT				
			PN: RVT70HSBNWN00 V1.1A			
			SN:			
			DRAWN: M.Stabinski	2026.03.22	1:1.33	
			CHECKED: M.Wierzbowski	2026.03.22	[mm]	
APPR: M.Wierzbowski		2026.03.22	ISO A3	P. 1 of 1		



P1-RIBUS CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	VDD	11	GPIO.1/IO.2
2	GND	12	GPIO.2/IO.3
3	SPI_SCLK	13	NC
4	MISO/IO.1	14	NC
5	MOSI/IO.0	15	NC
6	CS	16	NC
7	INT	17	BLVDD
8	RST/PD	18	BLVDD
9	GPIO.0	19	BLGND
10	DISP_AUDIO	20	BLGND

P2-LOUDSPEAKER OUTPUT CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	SPEAKER+	2	SPEAKER-