



TFT MODULE SPECIFICATION

RVT70HSHNWC00-B V1.1A

HB, IPS 7.0" HDMI LCD TFT DATASHEET
Rev. 1.0
2026-10-01

Riverdi Sp. z o.o.

Nowy Swiat 36
80-299 Gdansk, Poland
VAT ID: PL5842767153
Registration number (KRS): 0000923967

+48 587 703 116

Office hours: 9:00 to 17:30 CET (Mon-Fri)

contact@riverdi.com

riverdi.com

ITEM	CONTENTS	UNIT
LCD Type	TFT/Transmissive/Normally Black/IPS	/
Size	7.0	Inch
Viewing Direction	Free	/
Outside Dimensions (W x H x D)	179.96 x 119.00 x 24.26	mm
Active Area (W x H)	154.21 x 85.92	mm
Pixel Pitch (W x H)	0.1506 x 0.1432	mm
Resolution	1024 (RGB) x 600	/
Brightness	850	cd/m ²
Color Depth	16.7 M	/
Pixel Arrangement	RGB Vertical Stripe	/
Controller of the Main Board	RTD2660H	/
Video Interface	HDMI	/
With/Without Touch	With Projected Capacitive Touch Panel	/
CTP Driver	ILI2132A	/
Touch Panel Interface	USB-C	/
Power Supply	Power Jack (DC 7.0V - 30.0 V), USB-C	V
Bonding Technology	Optical Bonding	/
Weight	TBD	g

Note 1. RoHS3 compliant

Note 2. LCM weight tolerance: $\pm 5\%$.

1. REVISION RECORD

REV NO.	REV DATE	CONTENTS	REMARKS
1.0	2026-01-10	Initial Release	

2. CONTENTS

1.	REVISION RECORD	3
2.	CONTENTS	4
3.	MODULE CLASSIFICATION INFORMATION	5
4.	ASSEMBLY	6
4.1	uxTouch Assembly	6
5.	MODULE DRAWING	7
6.	ABSOLUTE MAXIMUM RATINGS	8
7.	ELECTRICAL CHARACTERISTICS	8
8.	BACKLIGHT ELECTRICAL CHARACTERISTICS	9
9.	ELECTRO-OPTICAL CHARACTERISTICS	10
10.	INTERFACE DESCRIPTION	13
10.1	PCB overview	13
10.2	Power connector -DC1	14
10.3	HDMI connector -JP5	15
10.4	Touch panel connector -USB-C	16
10.5	Light sensor connector - RT1	16
10.6	Backlight PWM &Power - J5	17
10.7	UART connector -J2	17
10.8	External Keyboard connector - J1	18
11.	DISPLAY SPECIFICATION	18
12.	INSPECTION	18
13.	RELIABILITY TEST	19
14.	LEGAL INFORMATION	20
15.	CONTACT	21

3. MODULE CLASSIFICATION INFORMATION

RV	T	70	H	S	H	N	W	C	00	B	V1.1A
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.

NO.	PARAMETER	SYMBOL
1.	BRAND	RV – Riverdi
2.	PRODUCT TYPE	T – TFT Standard
3.	DISPLAY SIZE	70 – 7.0”
4.	MODEL SERIAL NO.	H – High Brightness, IPS
5.	RESOLUTION	S – 1024 x 600 px
6.	INTERFACE	H – HDMI
7.	FRAME	N – Without Mounting Metal Frame
8.	BACKLIGHT TYPE	W – LED White
9.	TOUCH PANEL	C – With Capacitive Touch Panel, uxTouch
10.	VERSION	00 – (00-99)
11.	BONDING TECHNOLOGY	B – Optical bonding
12.	MODULE REVISION	V1.1A

4. ASSEMBLY

4.1 uxTouch Assembly

uxTouch are LCD TFT displays with specially designed projected capacitive touch panels. uxTouch display can be mounted without any additional holes in the housing. Our standard uxTouch displays include double-sided adhesive tape (DST) to stick TFT easily to the housing.

uxTouch models with double-side adhesive tape can be mounted by fastening the glass to the housing.






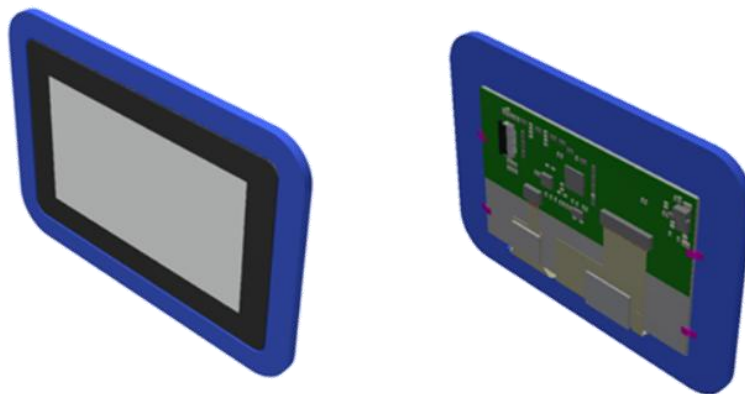


Figure 1. General view of the module

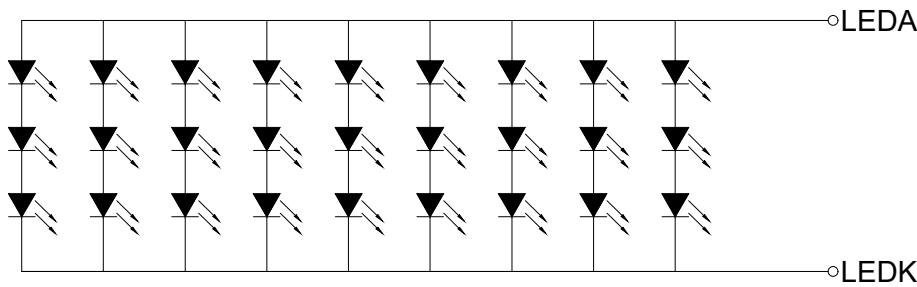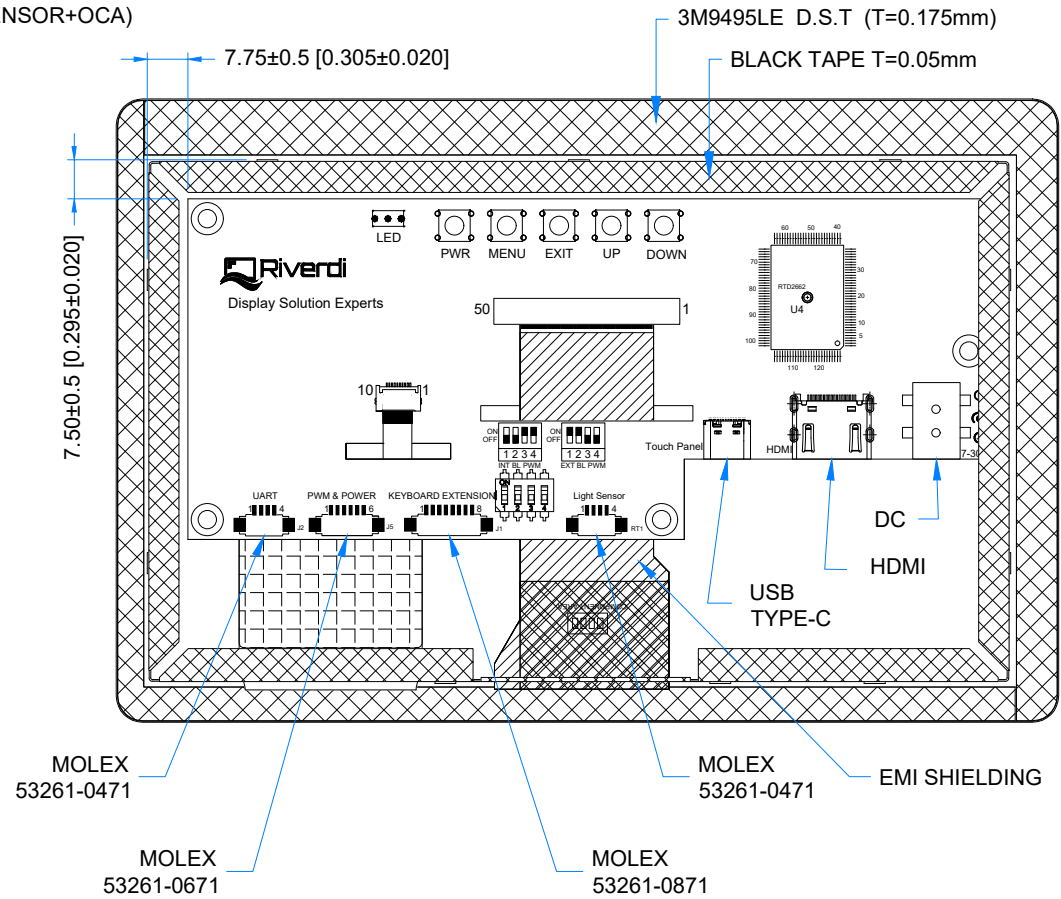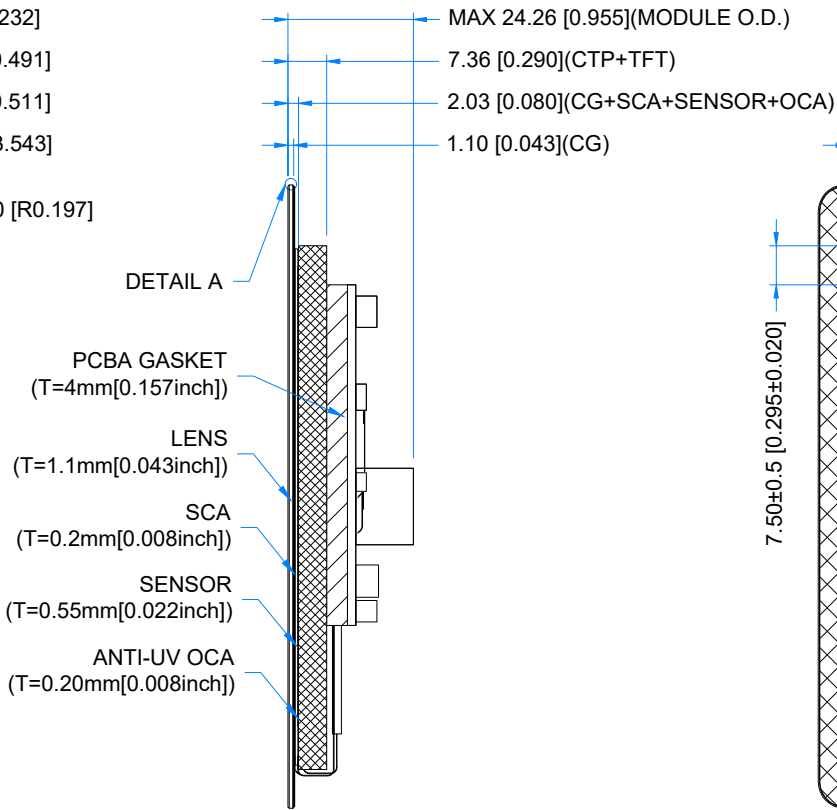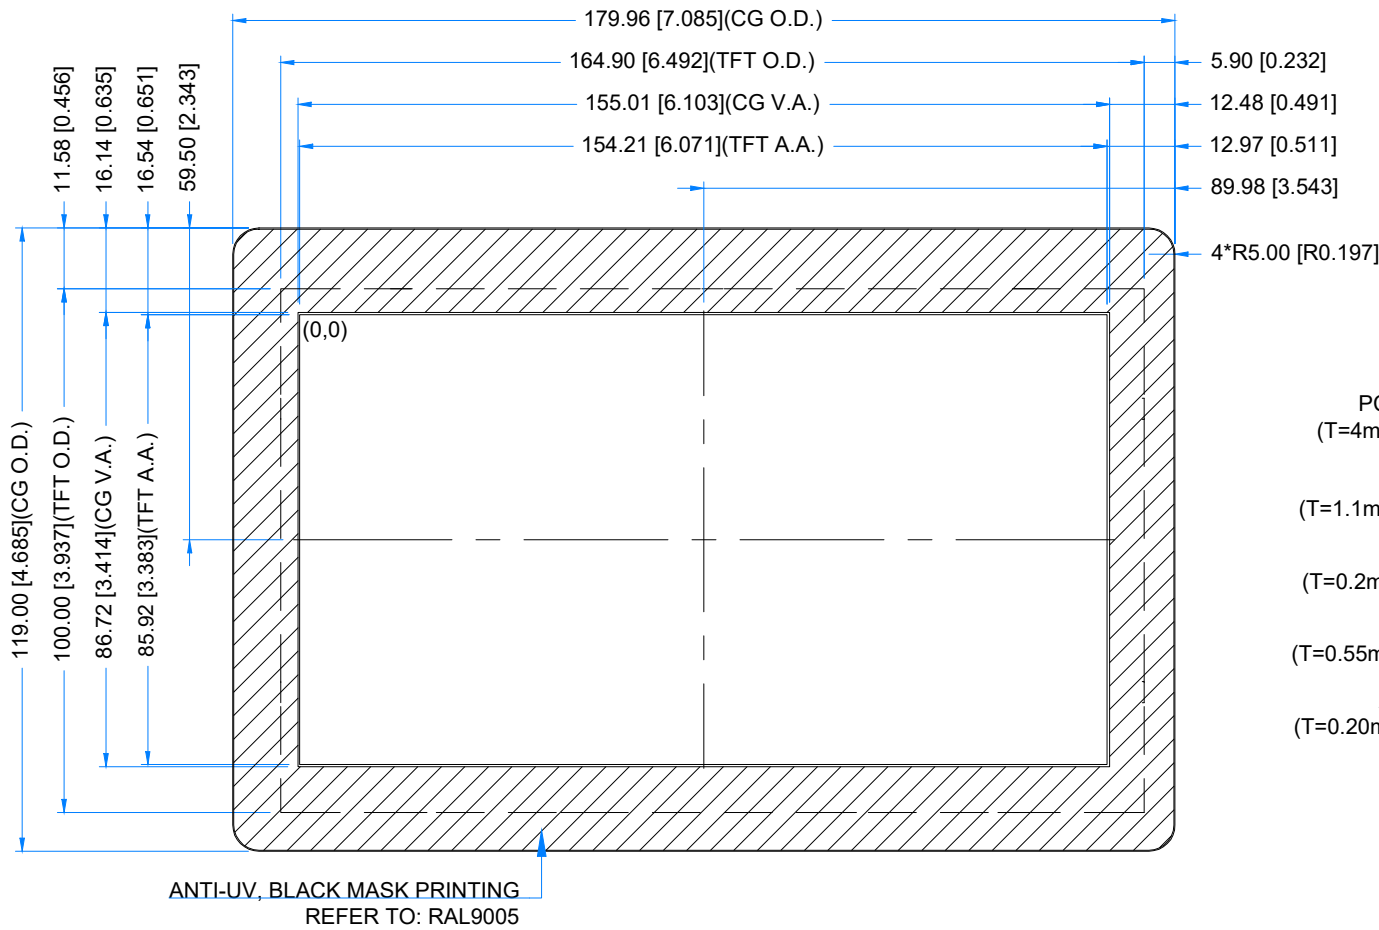

LCM NOTES: 1. LCD TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS 2. RESOLUTION: 1024x600 3. VIEWING ANGLE: FREE 4. MODULE SURFACE LUMINANCE: MAX. 850 cd/m ² 5. CONTROLLER IC OF MAIN BOARD: RTD2662 6. VIDEO INTERFACE: HDMI 7. POWER SUPPLY: POWER JACK (7.0-30.0V); USB-C.	TP NOTES: 1. TP STRUCTURE: G+G 2. CG THICKNESS: 1.10 mm 3. DRIVER IC: ILI2132A 4. TOUCH PANEL INTERFACE: USB-C	GENERAL NOTES: 1. OPATICAL BONDING 2. OPERATING TEMPERATURE: -20°C ~ 70°C 3. STORAGE TEMPERATURE: -30°C ~ 80°C 4. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm 5. RoHS3 COMPLIANT				
			PN: RVT70HSHNWC00-B V1.1A			
			SN:			
			DRAWN: M.Stabinski	2026.10.01	1:1.44	
			CHECKED: M.Wierzbowski	2026.10.01	[mm]	
APPR: M.Wierzbowski	2026.10.01	ISO A3	P. 1 of 1			

6. ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Supply Voltage for Module	VDD	7.0	30.0	V
Operating Temperature	T _{OP}	-20	70	°C
Storage Temperature	T _{ST}	-30	80	°C

Note. Exceeding maximum values may cause operation or damage to the unit.

7. ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Supply Voltage for Module	VDD	7.0	12.0	30.0	V	

PARAMETER	SYMBOL	BL 0%	BL 50%	BL 100%	UNIT	NOTE
Current Drawn from VDD@7.0V	I _{VDD}	315	545	815	mA	Note 1
Current Drawn from VDD@12.0V		180	305	450		
Current Drawn from VDD @24.0V		110	165	240		
Current Drawn from VDD @30.0V		90	130	190		
Current drawn from USB-C	I _{USB-C}	370	700	1160		Note 1, 2

Note 1. BL 0% Current was measured with BL brightness set to 0%,

BL 50% current was measured with BL brightness set to 50%,

BL 100% current was measured with BL brightness set to 100%.

Test condition: ambient temp 25 °C PCAP is on Active mode

Note 2. USB-C interface can be used as a sole power supply for all modules with or without touch panels. If DC1 power jack is used, the power from the USB-C connector is not drawn, as the onboard MOSFET key cuts it off.

8. BACKLIGHT ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Backlight Power Consumption	W_{BL}	-	2430	-	mW	
Lifetime	-	-	50,000	-	hours	Note

Note. Operating life means the period in which the LED brightness goes down to 50% of the initial brightness. Typical operating lifetime is the estimated parameter.

9. ELECTRO-OPTICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	RMK	NOTE
Response Time	Tr+Tf	$\theta=0^\circ$ $\phi=0^\circ$ Ta=25 °C	-	27	45	ms	FIG 2.	4, 7
Contrast Ratio	Cr		600	800	-	---	FIG 3.	1, 7
Surface Luminance	Lv		-	850	-	cd/m2		2, 7
Luminance Uniformity	δ WHITE		70	75	-	%		3
Viewing Angle Range	θ	$\phi = 90^\circ$	80	85	-	deg	FIG 4.	6
		$\phi = 270^\circ$	80	85	-	deg		
		$\phi = 0^\circ$	80	85	-	deg		
		$\phi = 180^\circ$	80	85	-	deg		
CIE (x, y) Chromaticity	Rx	$\theta=0^\circ$ $\phi=0^\circ$ Ta=25 °C	0.581	0.611	0.641	-	FIG 3.	5,7
	Ry		0.295	0.325	0.355	-		
	Gx		0.306	0.336	0.366	-		
	Gy		0.513	0.543	0.573	-		
	Bx		0.117	0.148	0.178	-		
	By		0.127	0.157	0.187	-		
	Wx		0.291	0.321	0.351	-		
	Wy		0.315	0.345	0.375	-		
NTSC ratio	-		40	47	-	%		

Note 1. Contrast Ratio (CR) is defined mathematically as below, for more information see Figure 3.

$$\text{Contrast Ratio} = \frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P3, P4, P5)}}$$

Note 2. Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see Figure 3.

L_v = Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)

Note 3. The uniformity in surface luminance δ WHITE is determined by measuring luminance at each test position 1 through 5 and then dividing the minimum luminance of 5 points luminance by maximum luminance of 5 points luminance. For more information see Figure 3.

$$\delta \text{ WHITE} = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}$$

Note 4. Response time is the time required for the display to transition from white to black (Rise Time, T_r) and from black to white (Decay Time, T_f). For additional information see Figure 2. The test equipment is BM-7A.

Note 5. CIE (x, y) chromaticity, the x, y value is determined by measuring luminance at each test position 1 through 5 and then make average value.

Note 6. For TFT module, viewing angle is the angle at which the contrast ratio is greater 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to LCD surface. For more information see Figure 4.

Note 7. Viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80). For response time testing, the testing data is based on BM-7A. Instruments for Contrast Ratio, Surface Luminance, Luminance Uniformity, Chromaticity the test data is based on SR-3A.

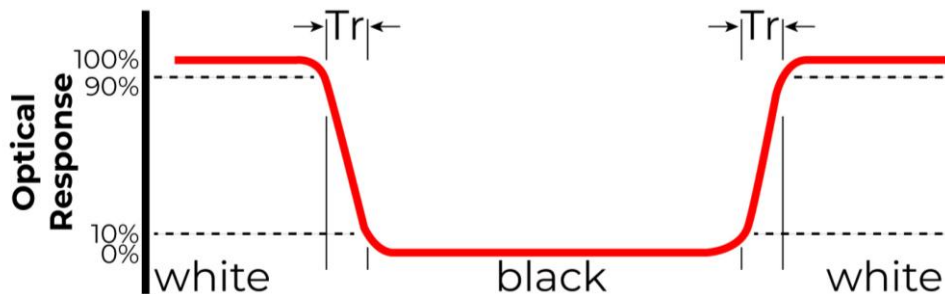


Figure 2. The definition of response time

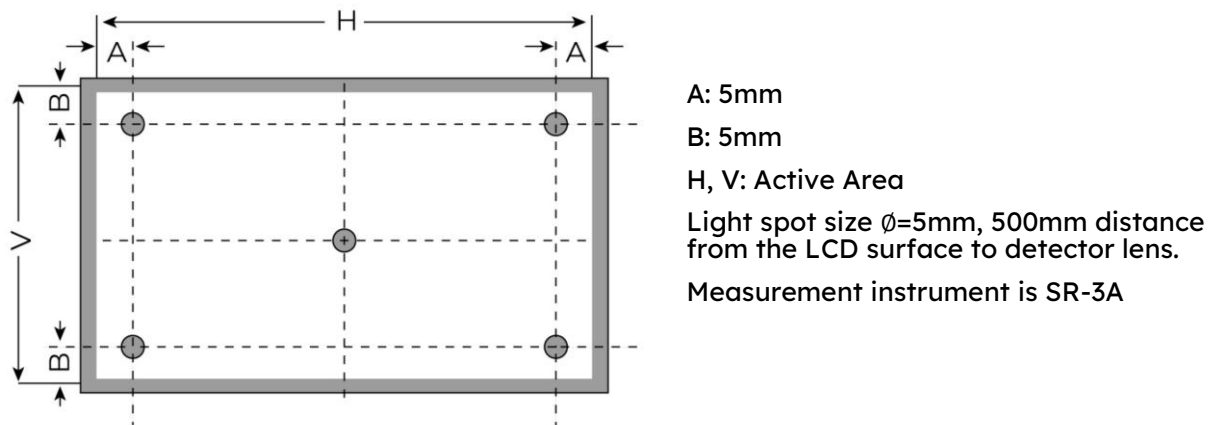


Figure 3. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity


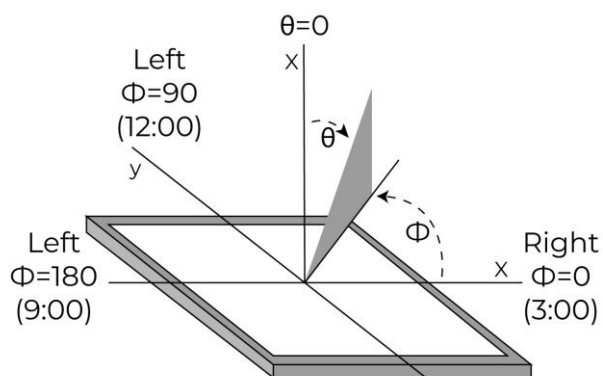


Figure 4. The definition of viewing angle

10. INTERFACE DESCRIPTION

10.1 PCB overview

Picture below shows the connectors exact placement and their descriptions.

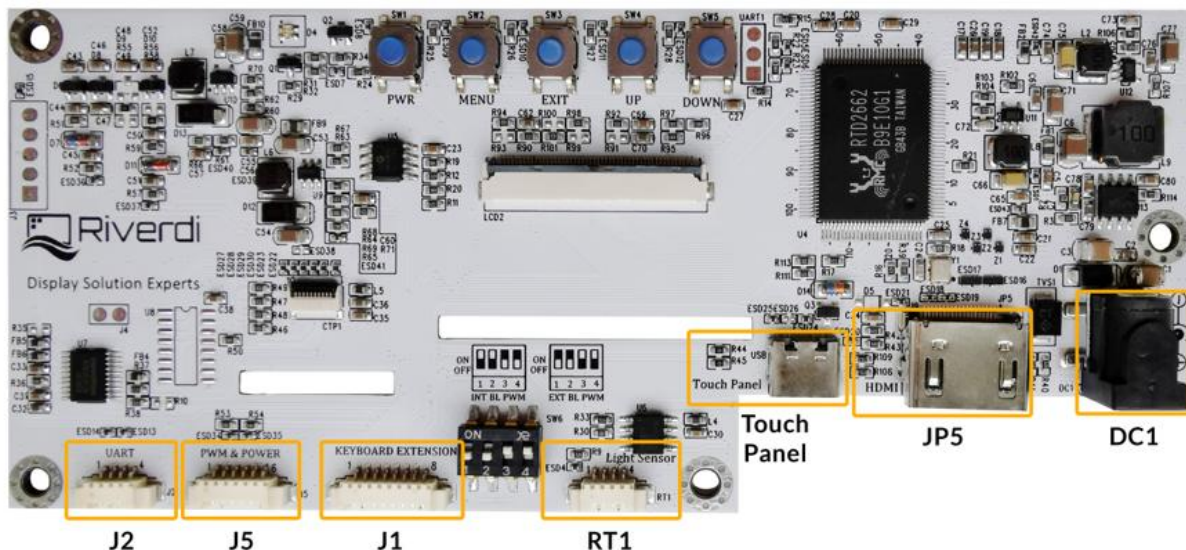

NAME	CONNECTOR	DESCRIPTION	NOTE
DC1	Power Jack	DC jack, (5.5 mm OD; 2.1mm ID) This is the connector to power on the TFT module. It allows DC for voltage range from 7.0V to 30.0V	
JP5	HDMI connector	This is the connector to which you can connect the HDMI signal source to the module.	
Touch Panel	USB-C	Touch panel interface for module with touch panel. Also, the USB-C can be used as a power supply for all modules with or without touch panels.	
J1	External keyboard connector	Molex 53261-0871 or alternative; Horizontal, 1.25mm pitch; 8 pins. The connector is reserved for external keyboard. Performs the same functions: PWR, MENU, EXIT, UP, DOWN as the pushbuttons on PCB.	Note 1
J5	Backlight PWM & Power	Molex 53261-0671 or alternative; Horizontal, 1.25mm pitch; 6 pins.	Note 2

		The unit realizes the function of digital dimming. This connector enables to control backlight PWM externally.	
J2	UART	Molex 53261-0471 or alternative; Horizontal, 1.25mm pitch; 4 pins. It supports asynchronous serial communication UART port.	Note 3
RT1	Light sensor	Molex 53261-0471 or alternative; Horizontal, 1.25mm pitch; 4 pins. To connect external light sensor	Note 1

Note 1. Light sensor and external keyboard are optional, not included in the standard kit.

Note 2. 4 position-DIP onboard switch SW6 is used to choose the power to backlight. The settings are:

INTERNAL BL PWM: Set 1&2 to OFF, and 3&4 to ON,

EXTERNAL BL PWM: Set 1&2 to ON, and 3&4 to OFF.

Note 3. UART functionality is under development process.

10.2 Power connector -DC1

PIN NO.	SYMBOL	DESCRIPTION
1	VDD	Power supply DC
2	GND	GND

10.3 HDMI connector -JP5

PIN NO.	SYMBOL	DESCRIPTION
1	TMDS Data 2+	TMDS differential signal 2+
2	TMDS Data2 Shield	Data2 shielding ground
3	TMDS Data 2-	TMDS differential signal 2-
4	TMDS Data 1+	TMDS differential signal 1+
5	TMDS Data1 Shield	Data1 shielding ground
6	TMDS Data 1-	TMDS differential signal 1-
7	TMDS Data 0+	TMDS differential signal 0+
8	TMDS Data 0 Shield	Data0 shielding ground
9	TMDS Data 0-	TMDS differential signal 0-
10	TMDS Data Clock+	TMDS differential signal Clock+
11	TMDS Data Shield	Clock shielding ground
12	TMDS Data Clock-	TMDS differential signal Clock-
13	CEC	Electronic protocol CEC
14	NC	No Connection
15	SCL	I ² C clock Line
16	SDA	I ² C data Line
17	DDC/CEC GND	Data display channel
18	+5V	HDMI 5V
19	Hot Plug Detect	Hot plug Detect

Note 1. Matched Riverdi 4K HDMI cable accessory: 4K HDMI CABLE

10.4 Touch panel connector -USB-C

PIN NO.	SYMBOL	DESCRIPTION
A1/B1	USB_GND	USB_ Ground
B12/A12	USB_GND	USB_ Ground
A4/B4	V_BUS	V_Bus Power; 5V
B9/A9	V_BUS	V_Bus Power; 5V
A5	CC1	Configuration channel
A6	DP1	USB differential pair, position 1, positive
A7	DN1	USB differential pair, position 1, negative
A8	SBU1	Sideband use
B5	CC2	Configuration channel
B6	DP2	USB differential pair, position 2, positive
B7	DN2	USB differential pair, position 2, negative
B8	SBU2	Configuration channel

Note 1. All the signals in Touch panel connector are in accordance with USB-C standard.

Note 2. Matched Riverdi cable accessory: USB-A 2.0 TO USB-C CABLE

10.5 Light sensor connector – RT1

PIN NO.	SYMBOL	DESCRIPTION	NOTE
1	GND	Ground	
2	ADC_IN	ADC Input from Light sensor; Maximum input 3.3V	
3	NC	No connection	
4	Light sensor VDD	Light sensor VDD	Note 1

Note 1. The output voltage ranges from 3.0 V to 3.6 V. The maximum current is 50mA.

Note 2. Matched Riverdi cable accessory: RVA-0104M-1.25FF

10.6 Backlight PWM &Power -J5

PIN NO.	SYMBOL	DESCRIPTION	NOTE
1	GND	Ground	
2	GND	Ground	
3	EN	Backlight enable, active H	
4	PWM	PWM input; 3.3V	Note 1
5	VDD	Power supply 7.0V - 30.0V	Note 2
6	VDD	Power supply 7.0V - 30.0V	

Note 1. PWM frequency range: 1kHz - 10kHz

100% PWM duty cycle corresponding to minimum backlight

0% PWM duty cycle corresponding to maximum backlight

Note 2. Pin 5&6 are internally connected with power connector(DC), VDD.

So, the voltage range is the same as power connector(DC)

Note 3. 4 position-DIP onboard switch **SW6** is used to choose the power source to backlight. The settings are:

- a) INTERNAL BL PWM: Set 1&2 to OFF, and 3&4 to ON,
- b) EXTERNAL BL PWM: Set 1&2 to ON, and 3&4 to OFF.

Note 4. Matched Riverdi cable accessory: RVA-0106M-1.25FF-1

Attention! An essential detail concerning this cable setup in your application:

pins 1,2 and 5,6 have misleading colors.

10.7 UART connector -J2

PIN NO.	SYMBOL	DESCRIPTION	NOTE
1	GND	Ground	
2	RXD	Receive Data	
3	TXD	Transmit Data	
4	VDD_UART	UART VDD	Note 2

Note 1. UART functionality is under development process.

Note 2. The output voltage ranges from 3.0 V to 3.6 V. The maximum current is 50mA.

Note 3. Matched Riverdi cable accessory: RVA-0104M-1.25FF

10.8 External Keyboard connector - J1

PIN NO.	SYMBOL	DESCRIPTION
1	Down	Page down
2	Up	Page up
3	Exit	Exit
4	Menu	Menu
5	PWR	Power on/off
6	LED_EN	LED Enable; Output signal 3.3V
7	GND	Ground
8	Keyboard VDD	Keyboard VDD; Output 3.3V

Note 1. Matched Riverdi cable accessory: RVA-0108M-1.25FF

11. DISPLAY SPECIFICATION

The TFT of the module applies Riverdi High Brightness, IPS, 7.0" RGB: RVT70HSTNWC00-B.

The supported resolution of the display in this module is 1024*600.

For detailed information, please refer to datasheet of display.

12. INSPECTION

Standard acceptance/rejection criteria for TFT module according to document available [here](#).

13. RELIABILITY TEST

NO.	TEST ITEM	TEST CONDITION	NOTE
1	High Temperature Storage	80°C/120 hours	A,B,C,D,E
2	Low Temperature Storage	-30°C/120 hours	
3	High Temperature Operating	70 °C /120 hours	
4	Low Temperature Operating	-20°C/120 hours	
5	High Temperature and High Humidity	+60°C, 90%RH, 120hrs	
6	Thermal Cycling Test (No operation)	-20°C/30 min ~ +70°C/30 min for a total 10 cycles, Start with cold temperature and end with high temperature.	A,B,C,D,E
7	Vibration Test	Sweep:10Hz~55Hz~10Hz 2G 2 hours for each direction of X. Y. Z. (6 hours for total)	A,B,C,D,E
8	Package Vibration Test	Random Vibration : 0.015G*G/Hz from 5-200HZ, - 6dB/Octave from 200-500HZ 2 hours for each direction of X. Y. Z. (6 hours for total)	A,B,C,D,E
9	Package Drop Test	Height: 60 cm 1 corner, 3 edges, 6 surfaces	A,B,C,D,E
10	ESD	Contact=+/-2KV, Air=+/- 4KV,(R=330R,C=150pF), 1 sec,9point,10times/point;	A,B,C,D,E

Notes

- A. LCM each function is OK.
- B. LCM appearance inspection without abnormalities (Including scratch, damage, corrosion and serious deformation)
- C. LCM brightness above the Min. value of Spec.
- D. Luminance uniformity above the Min. value of Spec.
- E. Color chromaticity within tolerance range.

14. LEGAL INFORMATION

CE marking is usually obligatory only for a complete end product. Riverdi display modules are semi-finished goods which are used as inputs to become part of the finished products.

Therefore, Riverdi display modules are not CE marked.

This is not a standalone product. It was designed as an electronic component. It needs integration with a whole system to be fully functional.

Riverdi grants the guarantee for the proper operation of the goods for a period of 12 months from the date of possession of the goods. If in a consequence of this guaranteed execution the customer has received the defects-free item as replacement for the defective item, the effectiveness period of this guarantee shall start anew from the moment the customer receives the defects-free item.

Information about device is the property of Riverdi and may be the subject of patents pending or granted. It is not allowed to copy or disclosed this document without prior written permission.

Riverdi endeavors to ensure that all contained information in this document is correct but does not accept liability for any error or omission. Riverdi products are in developing process and published information may be not up to date. Riverdi reserves the right to update and makes changes to Specifications or written material without prior notice at any time. It is important to check the current position with Riverdi.

Images and graphics used in this document are only for illustrative the purpose. All images and graphics are possible to be displayed on the range products of Riverdi, however the quality may vary. Riverdi is no liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive, or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) relating to any product, service provided or to be provided by Riverdi, or the use or inability to use the same, even if Riverdi has been advised of the possibility of such damages.

Riverdi products are not fault tolerant nor designed, manufactured or intended for use or resale as on line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of the product could lead directly to death, personal injury or severe physical or environmental damage ('High-Risk Activities'). Riverdi and its suppliers specifically disclaim any expressed or implied warranty of fitness for High-Risk Activities. Using Riverdi products and devices in 'High-Risk Activities' and in any other application is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Riverdi from all damages, claims or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Riverdi intellectual property rights.

15. CONTACT

Your Success is Our Priority

Stuck on a technical challenge? Need expert guidance?
Our dedicated support team is just a message away.

Contact us at

[**contact@riverdi.com**](mailto:contact@riverdi.com)

We're here to ensure your project's success, every step of the way!