



TFT MODULE SPECIFICATION

RVT70HSPFWCA0

**Raspberry Pi5, MIPI DSI, IPS 7.0" LCD TFT display
datasheet**

Rev. 1.0

2025-12-19

Riverdi Sp. z o.o.

Nowy Świat 36
80-299 Gdańsk, Poland
VAT ID: PL5842767153
Registration number (KRS): 0000923967

+48 587 703 116

Office hours: 9:00 to 17:30 CET (Mon-Fri)

contact@riverdi.com

riverdi.com

ITEM	CONTENTS	UNIT
LCD Type	TFT/Transmissive/Normally Black/IPS	/
Size	7.0	Inch
Viewing Direction	Free	/
Outside Dimensions (W x H x D)	181.60 x 100.60 x 24.54	mm
Active Area (W x H)	154.21 x 85.92	mm
Pixel Pitch (W x H)	0.1506 x 0.1432	mm
Resolution	1024 x 600	/
Brightness	850	cd/m ²
Color Depth	16.7 M	/
Pixel Arrangement	RGB Vertical Stripe	/
Interface	Raspberry Pi 5(RPi-IO) + DSI	/
With/Without Touch	With Projected Capacitive Touch Panel	/
CTP Driver	ILI2132A	/
Supply Voltage for Module	5.0 (USB-C 5A) or 7.5-36 (DC input 25W)	V
Bonding Technology	Air Bonding	/
Weight	278	g

Note 1. RoHS3 compliant

Note 2. LCM weight tolerance: ± 5%.

1. REVISION RECORD

REV NO.	REV DATE	CONTENTS	REMARKS
1.0	2025-12-19	Initial release	

2. CONTENTS

1. REVISION RECORD	3
2. CONTENTS	4
3. MODULE CLASSIFICATION INFORMATION	5
4. ASSEMBLY	6
4.1 Mounting Frame	6
5. MODULE DRAWING	7
6. ABSOLUTE MAXIMUM RATINGS	8
7. ELECTRICAL CHARACTERISTICS	8
8. BACKLIGHT ELECTRICAL CHARACTERISTICS	9
9. ELECTRO-OPTICAL CHARACTERISTICS	10
10. INTERFACES DESCRIPTION	13
10.1 J7 connector	13
10.2 J1 connector	14
11. TIMING CHARACTERISTICS	15
12. CaPACITIVE TOUCH SCREEN PANEL SPECIFICATIONS	16
12.1 Mechanical characteristics	16
12.2 Electrical characteristics	16
13. INSPECTION	16
14. RELIABILITY TEST	17
15. LEGAL INFORMATION	18
16. CONTACT	19

3. MODULE CLASSIFICATION INFORMATION

RV	T	70	H	S	P	F	W	C	A0
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.

NO.	PARAMETER	SYMBOL
1.	BRAND	RV - Riverdi
2.	PRODUCT TYPE	T - TFT Standard
3.	DISPLAY SIZE	70 - 7.0"
4.	MODEL SERIAL NO.	H - High Brightness, IPS
5.	RESOLUTION	S - 1024 x 600 px
6.	INTERFACE	P - Raspberry Pi 5
7.	FRAME	F - With Mounting Metal Frame
8.	BACKLIGHT TYPE	W - LED White
9.	TOUCH PANEL	C - With Capacitive Touch Panel
10.	VERSION	A0 - aTouch

4. ASSEMBLY

4.1 Mounting Frame

For dimensions 3.5", 4.3", 5.0", 7.0", 10.1", 12.1" and 15.6", the product with mounting frame version is available. Thanks to the four catches attached to the side, frame provides strong assembly to the surface by mounting element (like the screw, see Figure 1). The frames are specially designed to fit Riverdi products perfectly. The diameter of the mounting hole is 3.5mm.


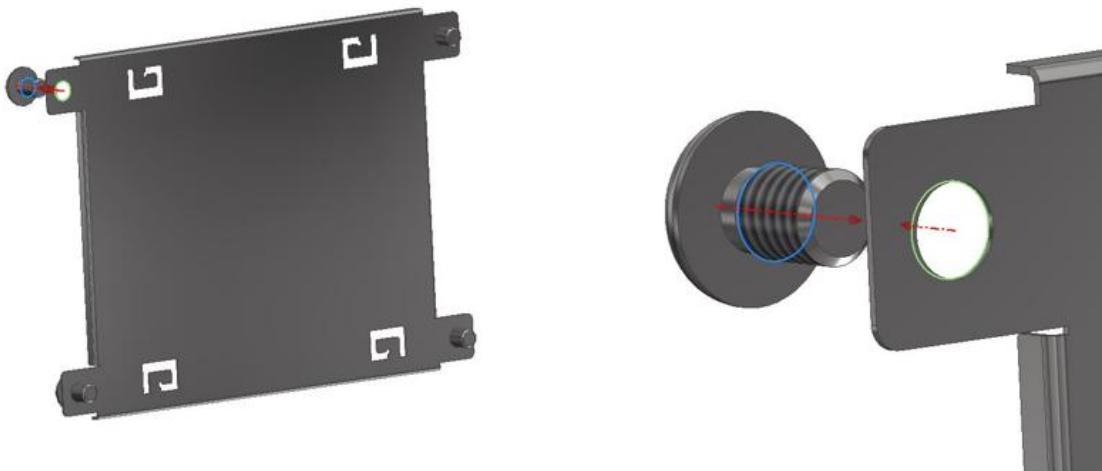


Figure 1. Mounting Frame

Revision:	Changes:	Date:
1.0	Initial Case	2025.12.15

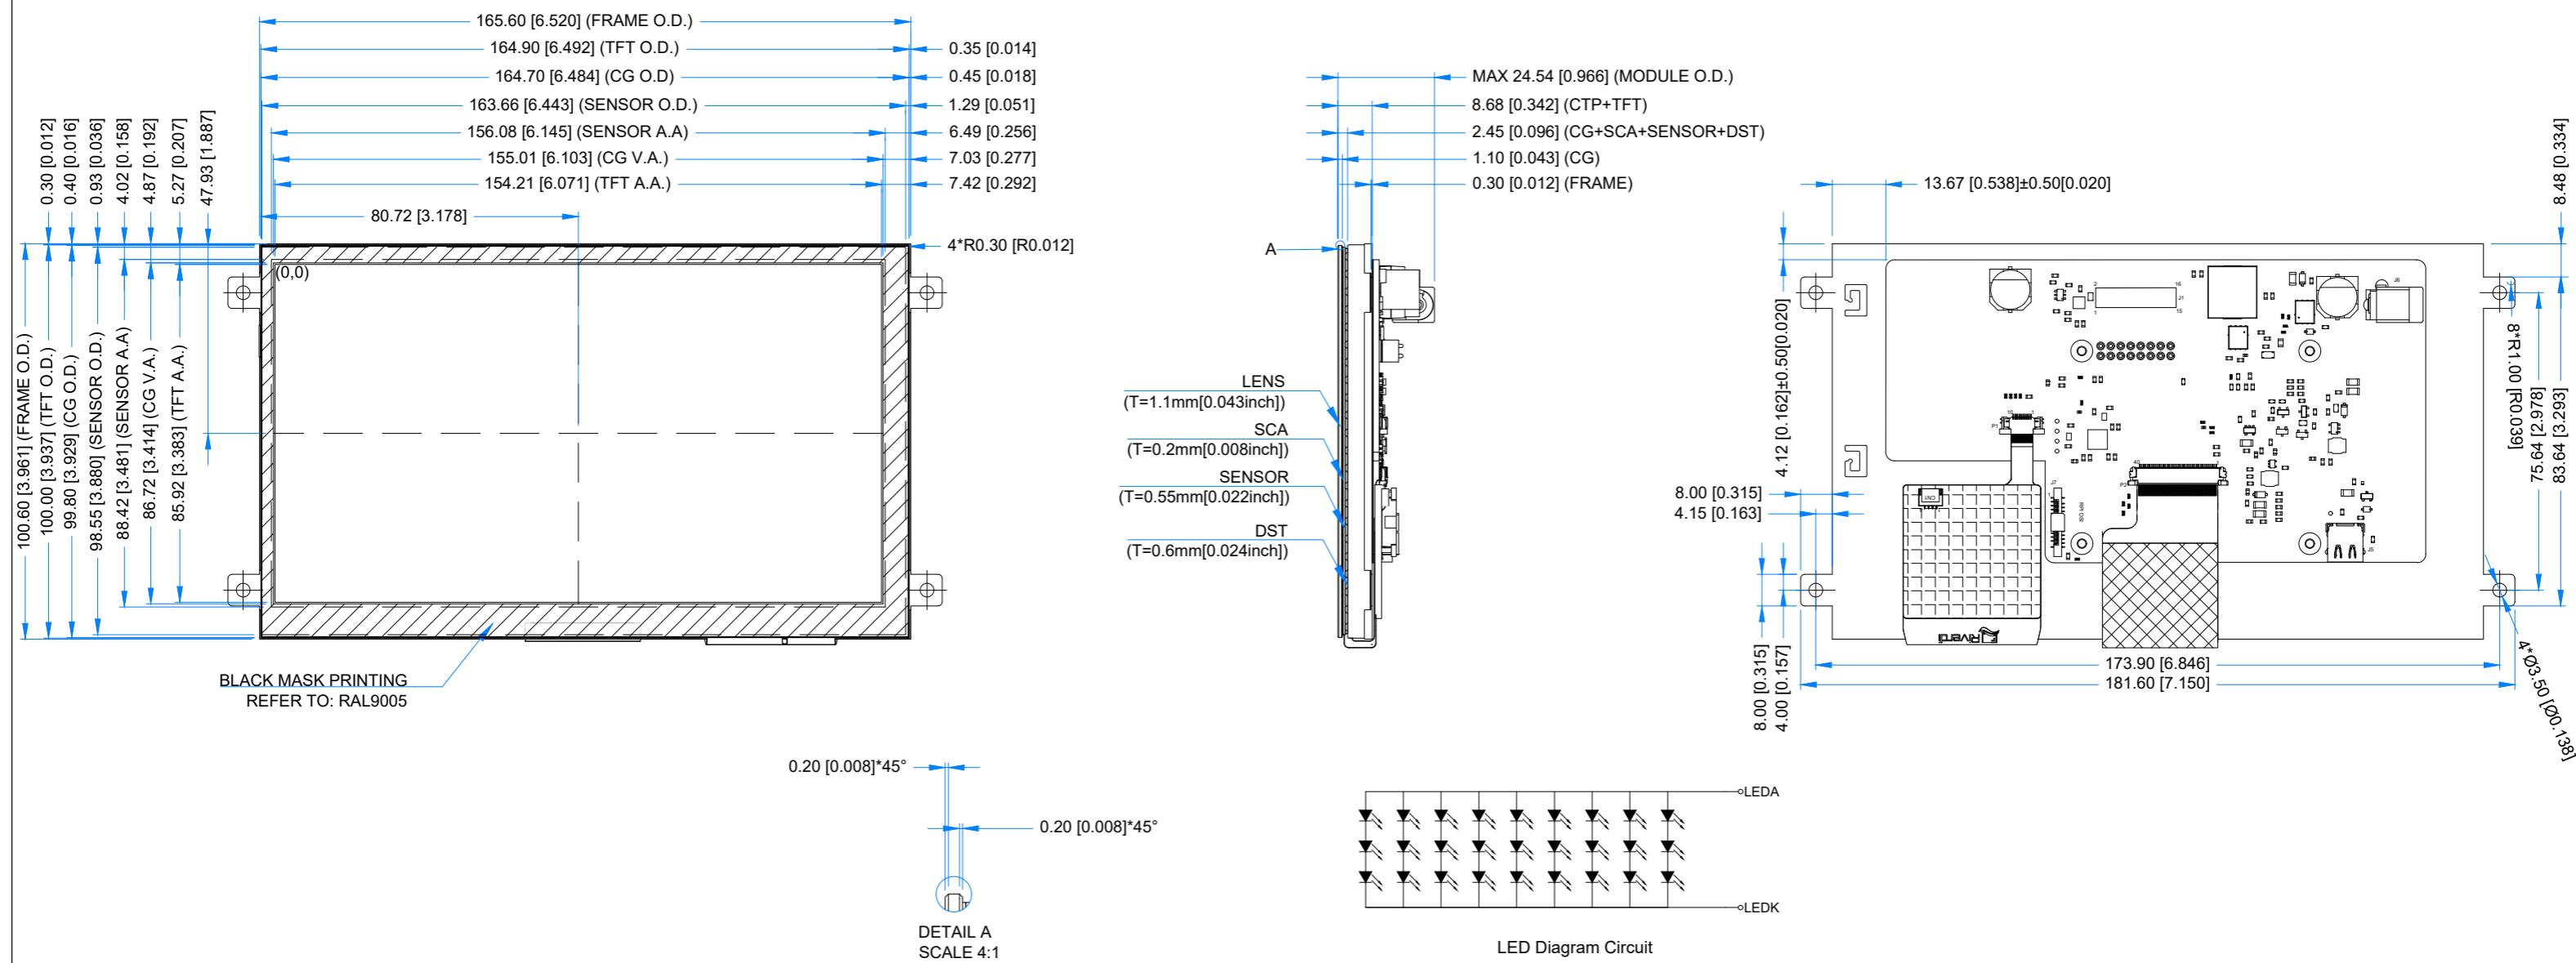

TFT NOTES: 1. DISPLAY TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS 2. RESOLUTION: 1024x600 3. VIEWING ANGLE: FREE 4. INTERFACE: MIPI DSI 5. DRIVER IC ON BOARD: SN65DSI83 6. SUPPLY VOLTAGE FOR MODULE: 5.0V(USB), 7.5-36V(DC INPUT) 7. RASPBERRY PI COMPATIBLE	TP NOTES: 1. TP STRUCTURE: G+G 2. CG THICKNESS: 1.1mm[0.043inch] 3. DRIVER IC: ILI2132A 4. SURFACE HARDNESS: 7H 5. INTERFACE: CONNECTED TO RPI 5 VIA I2C	GENERAL NOTES: 1. MODULE SURFACE LUMINANCE: 800cd/m ² 2. OPERATING TEMPERATURE: -20°C ~ 70°C 3. STORAGE TEMPERATURE: -30°C ~ 80°C 4. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm 5. RoHS COMPLIANT	PN: RVT70HSPFWCA0 SN: DRAWN: M.Stabinski CHECKED: A.Demko-Karolczuk APPR: M.Wierzbowski	2025.12.15 [mm] ISO A3 P. 1 of 1
---	--	--	---	---

6. ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Supply Voltage for Module	V_{DD}	-0.5	45	V
Operating Temperature	T_{OP}	-20	70	°C
Storage Temperature	T_{ST}	-30	80	°C
Storage Humidity (@ 25 ± 5°C)	H_{ST}	10	-	% RH
Operating Ambient Humidity (@ 25 ± 5°C)	H_{OP}	10	-	% RH

Note. The above are maximum values. If exceeded, they may cause permanent damage to the unit.

7. ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
USB-C Supply Voltage for Module	V_{USB}	4.8	5.0	5.2	V	
V_{IN} Supply Voltage	V_{IN}	7.5	12	36	V	
V_{IL} Input low voltage	V_{IL}	0	-	0.8	V	
V_{IH} Input high voltage	V_{IH}	2.5	-	3.3	V	
V_{OL} Output low voltage	V_{OL}	-	-	0.4	V	
V_{OH} Output high voltage	V_{OH}	2.9	-	-	V	

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Current drawn from V_{USB} @5.0V	I_{USB}	-	1.3	5.0	A	Note 1,2

Note 1.

MIN, current was measured with BL brightness set to 0%,
TYP, current was measured with BL brightness set to 50%,
MAX, current was measured with BL brightness set to 100% and RPI5 is under maximum load conditions.

Note 2.

Max provided current is absolute max.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Power consumption	P	-	7.8	25	W	Note 1

Note.1 Current drawn please calculate as $I=P/V$. Based on the power supply value.

5V with power supply 7.8W,

$$7.8/5 = 1.56A$$

8. BACKLIGHT ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Lifetime	-	-	50,000	-	hours	Note 1

Note 1. Unless specified, the ambient temperature $T_a = 25^\circ C$

Note 2. The recommended operating conditions refer to a range in which operation of this product is guaranteed. The operation cannot be guaranteed if the absolute maximum values exceed.

Note 3. If LED is driven by high current, high ambient temperature and humidity condition, the lifetime of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating lifetime is estimated data.

9. ELECTRO-OPTICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	RMK	NOTE
Response Time	Tr+Tf	$\theta=0^\circ$ $\phi=0^\circ$ Ta=25 °C	-	35	-	ms	FIG 2.	4, 7
Contrast Ratio	Cr		-	800	-	---	FIG 3.	1, 7
Surface Luminance	Lv		-	850	-	cd/m ²		2, 7
Viewing Angle Range	θ	$\phi = 90^\circ$	75	85	-	deg	FIG 4.	6
		$\phi = 270^\circ$	75	85	-	deg		
		$\phi = 0^\circ$	75	85	-	deg		
		$\phi = 180^\circ$	75	85	-	deg		
CIE (x, y) Chromaticity	Rx	$\theta=0^\circ$ $\phi=0^\circ$ Ta=25 °C	0.578	0.618	0.658	-	FIG 3.	5,7
	Ry		0.489	0.329	0.369	-		
	Gx		0.376	0.416	0.456	-		
	Gy		0.493	0.533	0.573	-		
	Bx		0.071	0.111	0.151	-		
	By		0.108	0.148	0.188	-		
	Wx		0.270	0.310	0.350	-		
	Wy		0.290	0.330	0.370	-		

Note 1. Contrast Ratio (CR) is defined mathematically as below, for more information see Figure 2.

$$\text{Contrast Ratio} = \frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P3, P4, P5)}}$$

Note 2. Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see Figure 2.

$$Lv = \text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}$$

Note 3. The uniformity in surface luminance δ WHITE is determined by measuring luminance at each test position 1 through 5, and then dividing the minimum luminance of 5 points luminance by maximum luminance of 5 points luminance. For more information see Figure 2.

$$\delta \text{ WHITE} = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}$$

Note 4. Response time is the time required for the display to transition from white to black (Rise Time, T_r) and from black to white (Decay Time, T_f). For additional information see Figure 1. The test equipment is BM-7A.

Note 5. CIE (x, y) chromaticity, the x, y value is determined by measuring luminance at each test position 1 through 5, and then make average value.

Note 6. For TFT module, viewing angle is the angle at which the contrast ratio is greater 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to LCD surface. For more information see Figure 3.

Note 7. Viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80). For response time testing, the testing data is based on BM-7A. Instruments for Contrast Ratio, Surface Luminance, Luminance Uniformity, Chromaticity the test data is based on SR-3A.

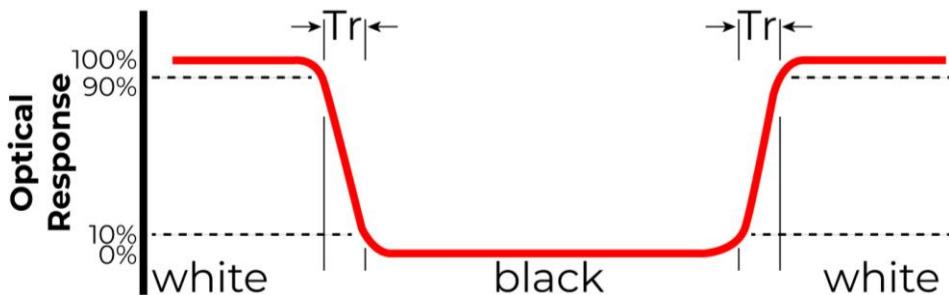


Figure 2. The definition of response time

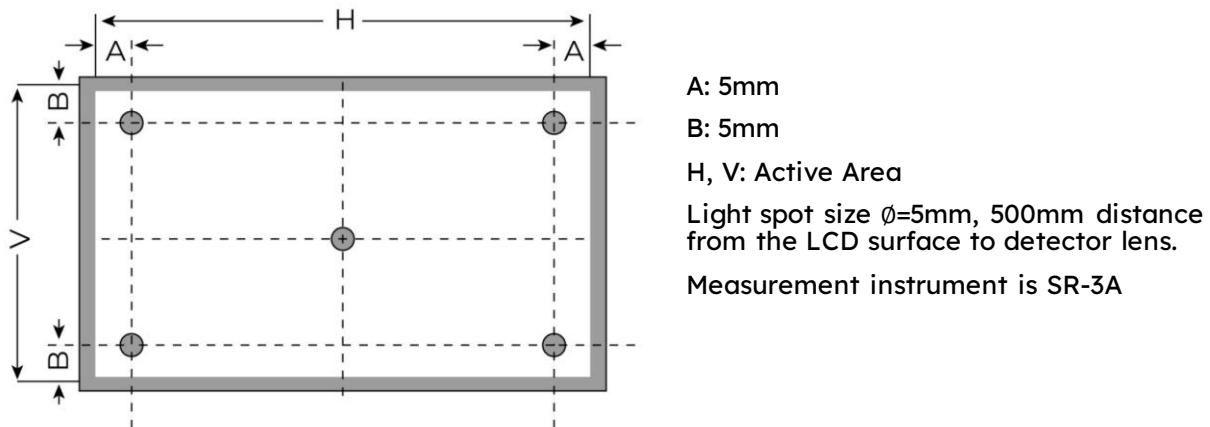


Figure 3. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity

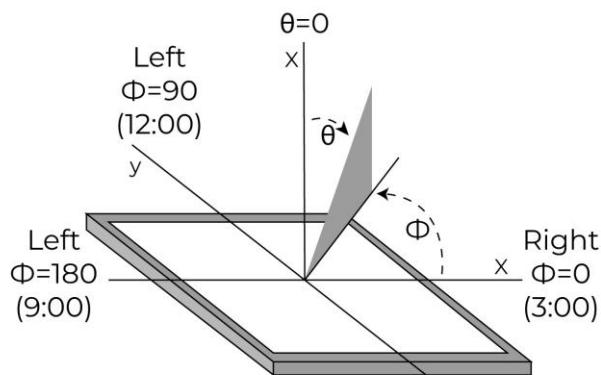


Figure 4. The definition of viewing angle

10. INTERFACES DESCRIPTION

10.1 J7 connector

PIN	SYMBOL	I/O/P	DESCRIPTION	NOTE
1	GND	P	Ground	
2	DSI_D0N	I/O		
3	DSI_D0P	I/O	MIPI DSI differential data pair. (Data lane 0)	
4	GND	P	Ground	
5	DSI_D1N	I		
6	DSI_D1P	I	MIPI DSI differential data pair. (Data lane 1)	
7	GND	P	Ground	
8	DSI_CLKN	I		
9	DSI_CLKP	I	MIPI DSI differential clock pair	
10	GND	P	Ground	
11	DSI_D2N	I		
12	DSI_D2P	I	MIPI DSI differential data pair. (Data lane 2)	
13	GND	P	Ground	
14	DSI_D3N	I		
15	DSI_D3P	I	MIPI DSI differential data pair. (Data lane 3)	
16	GND	P	Ground	
17	NC	-	Not connected	
18	NC	-	Not connected	
19	GND	P	Ground	

20	RPi_DSI_SCL	I/O	RPi Clock signal	
21	RPi_DSI_SDA	I/O	RPi Data signal	
22	VCC	P	Power supply 3.3V	

Note. Matched 22 pins, 0.5 mm pitch, 100 mm long FFC accessory: FFC0522100.

10.2 J1 connector

PIN	SYMBOL	I/O/ P	DESCRIPTION	NOTE
1	3.3V	P	Power Supply 3.3V from RPi	
2	5.0V	P	Power Supply 5.0V from DC/DC or USB-C	
3	CTP_SDA	I	Touch Panel data signal	
4	5.0V	P	Power Supply 5.0V from DC/DC or USB-C	
5	CTP_SCL	I	Touch Panel clock signal	
6	GND	P	Ground	
7	CTP_RST	I	Touch Panel reset signal	
8	NC	-	Not connected	
9	GND	P	Ground	
10	NC	-	Not connected	
11	LCD_RES	I	LCD reset signal	
12	BLPWM	I	Backlight PWM	
13	LCD_STBY	I	LCD standby	
14	GND	P	Ground	
15	CTP_INT	I/O	Touch Panel Interrupt	
16	RPi_Bridge_RST	I	RPi bridge reset signal	

Note. This interface is doubled. It has double connection available. Pogo pin and iDC connector J1.

11. TIMING CHARACTERISTICS

The TFT of the module applies Riverdi high brightness, IPS, 7.0" TFT: RVT70HSL FWCA0

For detailed information of the display, please refer to the datasheet of display.

PARAMETER	SYMBOL	VALUE			UNIT
		MIN.	TYP.	MAX.	
DCLK frequency (Frame rate 60Hz)	Fclk	40.8	51.2	67.2	MHz
Horizontal display area	Thd		1024		
H SYNC period time	Th	1114	1344	1400	DCLK
H SYNC blanking	Thb+Thfp	90	320	376	
Vertical display area	Tvd		600		H
V SYNC period time	Tv	610	635	800	
V SYNC blanking	Tvb+Tvfp	10	85	200	

12. CAPACITIVE TOUCH SCREEN PANEL SPECIFICATIONS

12.1 Mechanical characteristics

DESCRIPTION	SPECIFICATION	REMARK
Touch Panel Size	7.0 inch	uxTouch
Outline Dimension of CTP	181.60 mm x 100.60 mm	
Product Thickness	2.45 mm	
Glass Thickness	1.1 mm	
CTP View Area	155.01 mm x 86.72 mm	
Sensor Active Area	156.08 mm x 88.42 mm	
Surface Hardness	7H	

12.2 Electrical characteristics

DESCRIPTION	SPECIFICATION	REMARK
Linearity	+/-1.5mm	ILI2132A
Controller	ILI2132A	
Resolution	1024 x 600	

13. INSPECTION

Standard acceptance/rejection criteria for TFT module according to document available [here](#).

14. RELIABILITY TEST

NO.	TEST ITEM	TEST CONDITION	NOTE
1	High Temperature Storage	80°C/120 hours	Note 1
2	Low Temperature Storage	-30°C/120 hours	
3	High Temperature Operating	70°C/120 hours	
4	Low Temperature Operating	-20°C/120 hours	
5	High Temperature and High Humidity	40°C, 90%RH, 120Hrs	
7	Thermal Cycling Test (No operation)	-20°C for 30min, 70°C for 30 min. 100 cycles. Then test at room temperature after 1 hour	Note 2
8	Vibration Test	Frequency: 10 ÷ 55 Hz. Stroke: 1.5 mm. Sweep: 10Hz ÷ 55Hz ÷ 10 Hz. 2 hours for each direction of X, Y, Z (Total 6 hours)	
9	Package Drop Test	Height: 60 cm 1 corner, 3 edges, 6 surfaces	

Note 1. Sample quantity for each test item is 5 ÷ 10 pcs.

Note 2. The device is kept at room temperature for 2 hours prior to starting the test

15. LEGAL INFORMATION

CE marking is usually obligatory only for a complete end product. Riverdi display modules are semi-finished goods which are used as inputs to become part of the finished products.

Therefore, Riverdi display modules are not CE marked.

This is not a standalone product. It was designed as an electronic component. It needs integration with a whole system to be fully functional.

Riverdi grants the guarantee for the proper operation of the goods for a period of 12 months from the date of possession of the goods. If in a consequence of this guaranteed execution the customer has received the defects-free item as replacement for the defective item, the effectiveness period of this guarantee shall start anew from the moment the customer receives the defects-free item.

Information about device is the property of Riverdi and may be the subject of patents pending or granted. It is not allowed to copy or disclosed this document without prior written permission.

Riverdi endeavors to ensure that all contained information in this document is correct but does not accept liability for any error or omission. Riverdi products are in developing process and published information may be not up to date. Riverdi reserves the right to update and makes changes to Specifications or written material without prior notice at any time. It is important to check the current position with Riverdi.

Images and graphics used in this document are only for illustrative the purpose. All images and graphics are possible to be displayed on the range products of Riverdi, however the quality may vary. Riverdi is no liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive, or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) relating to any product, service provided or to be provided by Riverdi, or the use or inability to use the same, even if Riverdi has been advised of the possibility of such damages.

Riverdi products are not fault tolerant nor designed, manufactured or intended for use or resale as on line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of the product could lead directly to death, personal injury or severe physical or environmental damage ('High-Risk Activities'). Riverdi and its suppliers specifically disclaim any expressed or implied warranty of fitness for High-Risk Activities. Using Riverdi products and devices in 'High-Risk Activities' and in any other application is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Riverdi from all damages, claims or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Riverdi intellectual property rights.

16. CONTACT

Your Success is Our Priority

Stuck on a technical challenge? Need expert guidance?

Our dedicated support team is just a message away.

Contact us at

contact@riverdi.com

We're here to ensure your project's success, every step of the way!