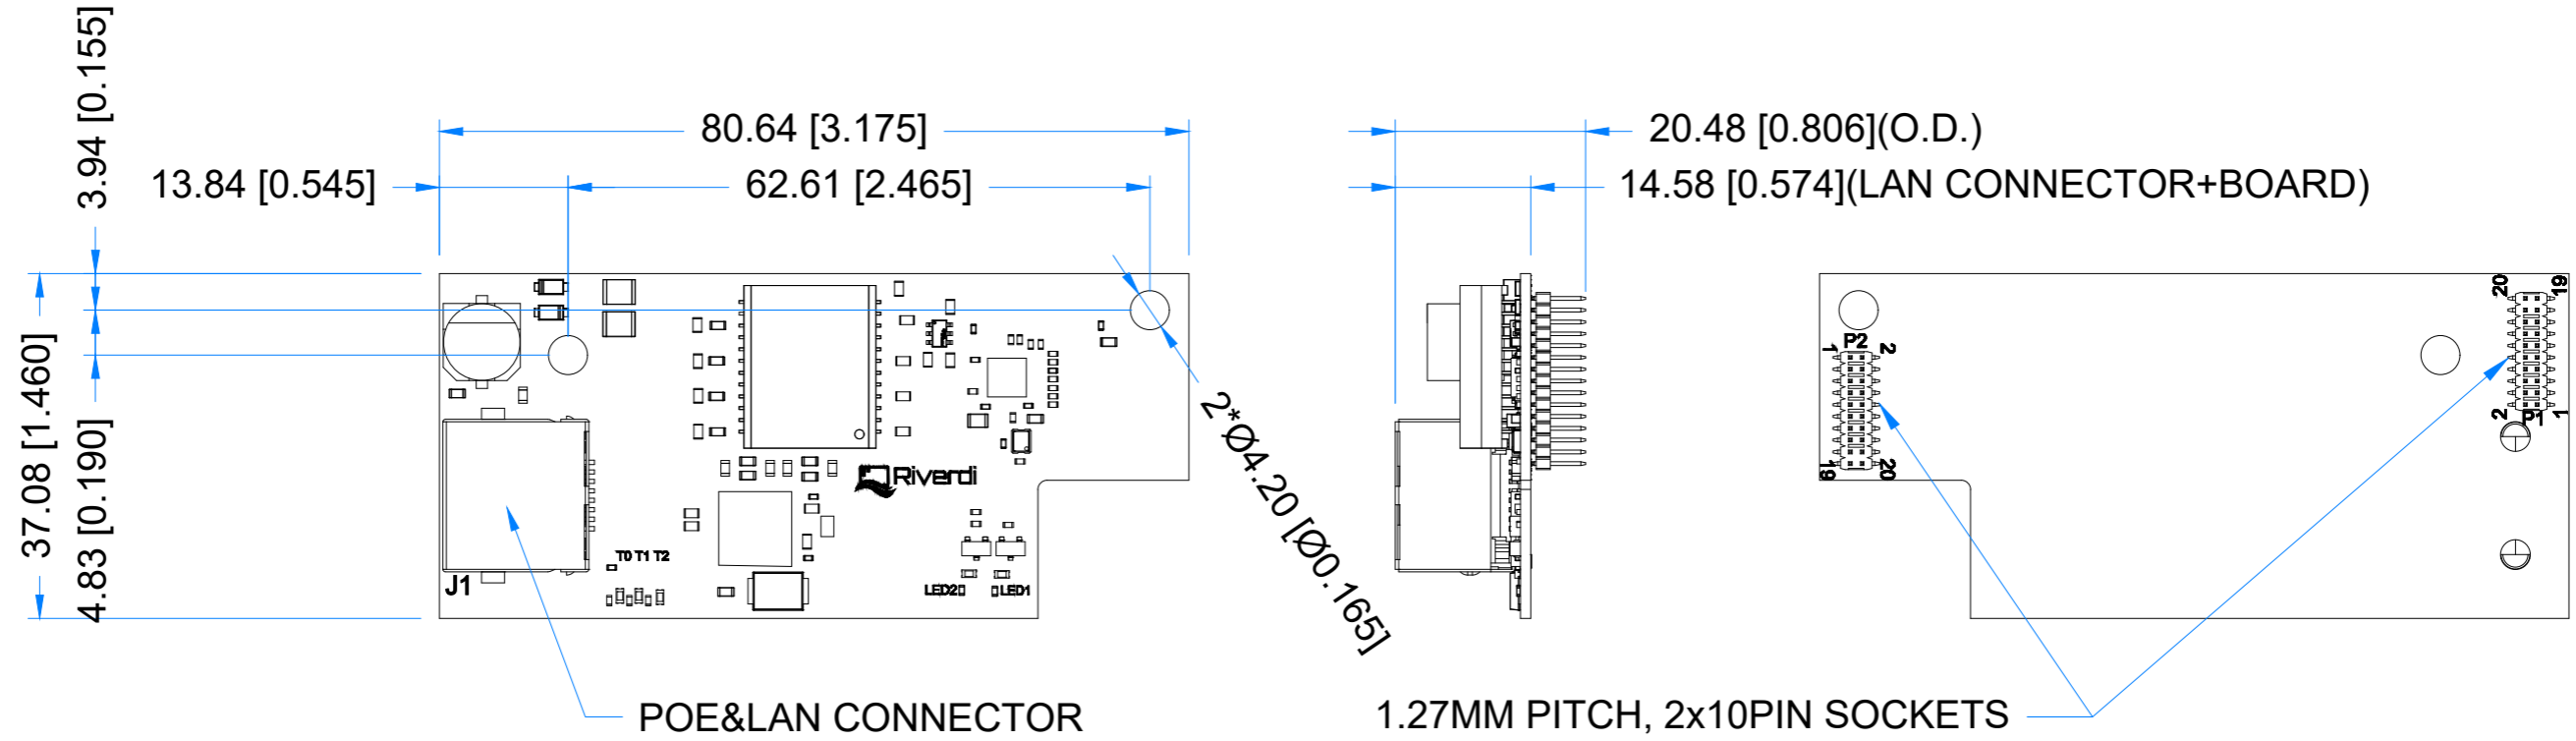




Revision:	Changes:	Date:
1.0	Initial release	2023.07.10



- GENERAL NOTES**
1. INPUT VOLTAGE: 36.0V-57.0V
 2. OPERATING TEMPERATURE: -20°C ~ 70°C
 3. STORAGE TEMPERATURE: -30°C ~ 80°C
 4. WITHOUT INDIVIDUAL TOLERANCE: ±0.5mm
 5. RoHS COMPLIANT

PN: STM32H7 POE ADDON			
SN:			
DRAWN: M.Natywa	2023.05.18	1:0.80	
CHECKED: Carol Gao	2023.07.10	[mm]	
APPR:		ISO A3	
			P. 1 of 1