

IPS LVDS 7.0" LCD TFT DATASHEET

Rev.1.3 2021-11-23

ITEM	CONTENTS	UNIT
LCD Type	TFT/Transmissive/Normally black/IPS	/
Size	7.0	Inch
Viewing Direction	Free	/
Outside Dimensions (W x H x D)	179.96 x 119.00 x 7.58	mm
Active Area (W x H)	154.21 x 85.92	mm
Pixel Pitch (W x H)	0.1506 x 0.1432	mm
Resolution	1024 (RGB) x 600	/
Brightness	850	cd/m²
LCD Interface Type	LVDS	/
Color Depth	16.7 M	/
Pixel Arrangement	RGB Vertical Stripe	/
LCD Driver	EK79001HK+EK73215BCGA	/
With/Without Touch	With Projected Capacitive Touch Panel	/
CTP Driver	ILI2132A	/
Touch Interface Type	USB /I2C/ Optional UART	/
Bonding Technology	Optical Bonding	/
Weight	214	g

Note 1: RoHS3 compliant

Note 2: LCM weight tolerance: ± 5%.



1. REVISION RECORD

REV NO.	REV DATE	CONTENTS	REMARKS
1.0	2020-08-15	Initial Release	
1.1	2021-07-28	Updating new template	
1.2	2021-10-01	Add info about driver IC of LCD Update chapter 11.1 TFT assignment	
1.3	2021-11-23	 Add notes about "GRB (Global Reset Pin)" Add notes to TFT pin 5, RESET Sub chapter 13.3 is updated Delete the redundant notes about "CABC_EN" 	



2. CONTENTS

1.	REVIS	ION RECORD	2
2.	CONT	ENTS	3
3.	MODU	JLE CLASSIFICATION INFORMATION	4
4.	uxTou	ch ASSEMBLY	5
5.	MODU	JLE DRAWING	6
6.	ABSOI	_UTE MAXIMUM RATINGS	7
7.	ELECT	RICAL CHARACTERISTICS	7
8.	BACKI	LIGHT ELECTRICAL CHARACTERISTICS	7
9.	POWE	R CONSUMPTION	8
10.	ELE	CTRO-OPTICAL CHARACTERISTICS	9
11.	INTE	RFACES DESCRIPTION	11
1	1.1 TF	T assignment	11
1	1.2 To	uch panel assignment	12
1	1.3 CC	DN1 assignment	12
12.	TIMI	NG CHARACTERISTICS	13
1:	2.1 Pa	rallel RGB timing characteristic	13
	12.1.1	DE MODE	13
	12.1.2	HV MODE – Horizontal input timing	13
	12.1.3	HV MODE – Vertical input timing	13
	12.1.4	Data input format	14
1:	2.2 AC	C characteristics	14
1:	2.3 Po	ower ON/OFF sequence	16
13.	CAP	ACITIVE TOUCH SCREEN PANEL SPECIFICATIONS	17
1.	3.1 Me	echanical characteristics	17
1.	3.2 Ele	ectrical characteristics	17
14.	INSF	PECTION	18
1		spection condition	
1	4.2 In:	spection standard	19
15.	REL	ABILITY TEST	20
16	LEC	AL INEODMATION	21



3. MODULE CLASSIFICATION INFORMATION

			70								
ĺ	1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.

NO.	PARAMETER	SYMBOL
1.	BRAND	RV – Riverdi
2.	PRODUCT TYPE	T – TFT Standard
3.	DISPLAY SIZE	70 – 7.0"
4.	MODEL SERIAL NO.	H – High Brightness, IPS
5.	RESOLUTION	S – 1024 x 600 px
6.	INTERFACE	L – TFT LCD, LVDS
7.	FRAME	N – Without Mounting Metal Frame
8.	BACKLIGHT TYPE	W – LED White
9.	TOUCH PANEL	C – With Capacitive Touch Panel
10.	VERSION	00 – (00-99)
11.	BONDING TECHNOLOGY	B – Optical Bonding




4. uxTouch ASSEMBLY

uxTouch are LCD TFT displays with specially designed projected capacitive touch panels. uxTouch display can be mounted without any additional holes in the housing. Our standard uxTouch displays include double-sided adhesive tape (DST) to stick TFT easily to the housing.

uxTouch models with double-side adhesive tape can be mounted by fastening the glass to the housing.



Figure 1. General view of the module

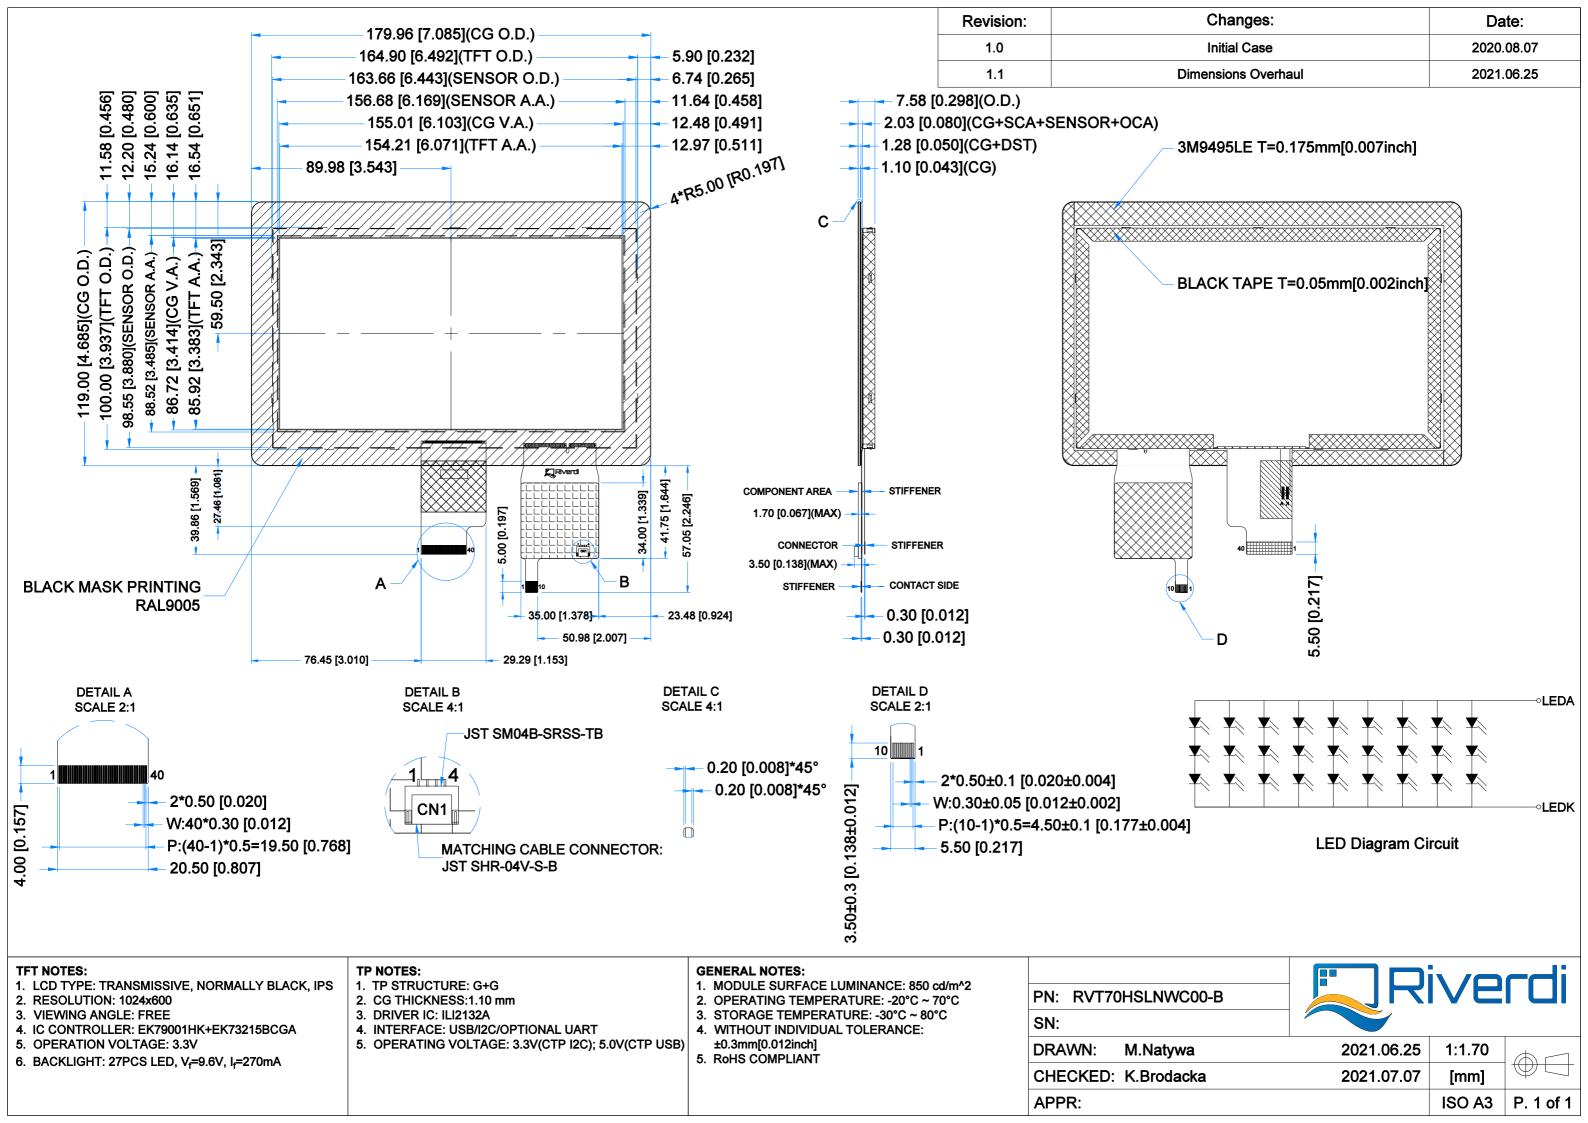



6. ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
	VDD	-0.3	3.96	
Dayyou for Circuit Driving	AVDD	-0.5	14.85	
Power for Circuit Driving	VGH	-0.3	40	V
	VGL	-20.0	0.3	1
Operating Temperature	T _{OP}	-20	70	°C
Storage Temperature	T _{ST}	-30	80	°C
Operating Humidity (@ 25 ± 5°C)	RH	10%	-	RH
Storage Humidity (@ 25 ± 5°C)	RH	10%	-	RH

7. ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
	DVDD	3.0	3.3	3.6		
Cupply \/altaga for	VGH	17	18	19		
Supply Voltage for Module	VGL	-6.6	-6.0	-5.4	V	
Module	AVDD	9.4	9.6	9.8		
	VCOM	3.6	3.8	4.0		
	IDD	-	30	45	mA	DVDD = 3.3V
Current of Power	IADD	-	35	45	mA	AVDD = 9.6V
Supply	IGH	-	0.5	1	uA	VGH = 18V
	IGL	-	0.5	1	mA	VGL= -6V
Input Voltage ' H ' level	V _{IH}	0.7DVDD	-	DVDD	V	Note 1
Input Voltage ' L ' level	V _{IL}	0	-	0.3VDD	V	Note 1

Note 1. STHL, STHR, OEH, L/R, CPH1÷CPH3, STVD, STVU, OEV, CKV, U/D.

8. BACKLIGHT ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Backlight Driving Voltage	V _F	9.0	9.6	10.2	V	
Backlight Driving Current	I _F	-	270	-	mΑ	
Backlight Power Consumption	W _{BL}	-	2592	-	mW	
LED Lifetime	-	-	50,000	-	hours	Note 1

Note 1. If LED is driven by high current, the lifetime of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating lifetime is estimated data.




9. POWER CONSUMPTION

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	NOTE
Gate on Power Current	IVGH	VGH=18V	-	0.5	1		
Gate off Power Current	IVGL	VGL=6V	-	0.5	1		
Digital Power Current	IDVDD	DVDD=3.3V	-	30	45	mΑ	Note 1
Analog Power Current	IAVDD	AVDD=9.6 V	-	35	45		NOLE I
Total Power Consumption	PC		-	447	604	mW	

Note. Typ. Specification: Gray-level test pattern; Max Specification: Black test pattern







black pattern



10. ELECTRO-OPTICAL CHARACTERISTICS

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25 °C. The values specified are at an approximate distance 500mm from the LCD surface at a viewing angle of Φ and θ equal to 0°.

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	RMK	NOTE
Response Time	Tr+Tf		-	35	-	ms	FIG 2.	4
Contrast Ratio	Cr	θ=O°	-	800	-		FIG 3	1
Luminance Uniformity	δ WHITE	ø=0° Ta=25 °C	-	75	-	%	FIG 3.	3
Surface Luminance	Lv	1u-25 C	-	850	-	cd/m²	FIG 3.	2
		ø = 90°	-	85	-	deg	FIG 4.	
Viewing Angle	θ	ø = 270°	-	85	-	deg	FIG 4.	6
Range	U	ø = O°	-	85	-	deg	FIG 4.	O
		ø = 180°	-	85	-	deg	FIG 4.	
	Rx		0.578	0.618	0.658	-		
	Ry		0.489	0.329	0.369	-		
	Gx	θ=O°	0.376	0.416	0.456	-		
CIE (x, y)	Gy	ø=0°	0.493	0.533	0.573	-	FIG 3.	5
Chromaticity	Bx	=0 Ta=25 °C	0.071	0.111	0.151	-	FIU 3.	5
	Ву	1a-25 C	0.108	0.148	0.188	-	-	
	Wx		0.270	0.310	0.350	-		
	Wy		0.290	0.330	0.370	-		

Note 1. Contrast Ratio (CR) is defined mathematically as below, for more information see Figure 3.

Contrast Ratio = $\frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P3, P4, P5)}}$

Note 2. Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see Figure 3.

Lv = Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)

Note 3. The uniformity in surface luminance δ WHITE is determined by measuring luminance at each test position 1 through 5, and then dividing the minimum luminance of 5 points luminance by maximum luminance of 5 points luminance. For more information see Figure 3.

 $\delta \text{ WHITE } = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}$

Note 4. Response time is the time required for the display to transition from white to black (Rise Time, Tr) and from black to white (Decay Time, Tf). For additional information see Figure 2. The test equipment is Autronic-Melchers's ConoScope series.

Note 5. CIE (x, y) chromaticity, the x, y value is determined by measuring luminance at each test position 1 through 5, and then calculating the average value.



Note 6. Viewing angle is the angle at which the contrast ratio is greater than 2. For TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to LCD surface. For more information see Figure 4.

Note 7. For viewing angle and response time testing, the testing data is based on Autronic-Melchers's ConoScope series. Instruments for Contrast Ratio, Surface Luminance, Luminance Uniformity, CIE the test data is based on TOPCON's BM-5 photo detector.

Figure 2. The definition of response time


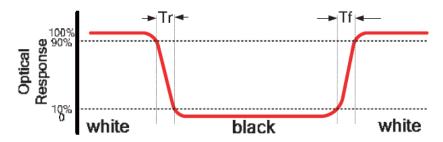


Figure 3. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity



A:5mm


B:5mm

H, V: Active Area

Light spot size Ø=5mm, 500mm distance from the LCD surface to detector lens.

Measurement instrument is TOPCON'S luminance meter BM-5

Figure 4. The definition of viewing angle

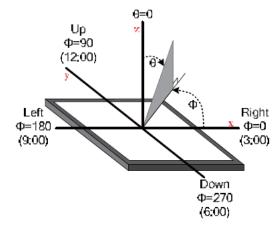



11. INTERFACES DESCRIPTION

11.1 TFT assignment

	SYMPOL	1/0	DESCRIPTION	NOTE	
PIN NO.	, 	1/0	DESCRIPTION	NOTE	
1	VCOM	Р	Common voltage		
2	VDD	Р	Power voltage for digital circuit		
3	VDD	Р	Power voltage for digital circuit		
4	NC	-	No connection		
5	RESET	1	Global reset pin	Note 1	
6	STBYB	I	Standby mode, normally pulled high STBYB = "1", normal operation STBYB = "0" timing controller, source driver will turn off, all output is High-Z.		
7	GND	Р	Ground		
8	RXINO-	1	-LVDS differential data input		
9	RXIN0+	I	+LVDS differential data input		
10	GND	Р	Ground		
11	RXIN1-	I	-LVDS differential data input		
12	RXIN1+	ſ	+LVDS differential data input		
13	GND	Р	Ground		
14	RXIN2-	I	-LVDS differential data input		
15	RXIN2+	I	+LVDS differential data input		
16	GND	Р	Ground		
17	RXCLKIN-	I	-LVDS differential clock input		
18	RXCLKIN+	I	+LVDS differential clock input		
19	GND	Р	Ground		
20	RXIN3-	I	-LVDS differential data input		
21	RXIN3+	I	+LVDS differential data input		
22	GND	Р	Ground		
23	NC	-	No connection		
24	NC	-	No connection		
25	GND	Р	Ground		
26	NC	-	No connection		
27	NC	-	No connection		
28	SELB	1	6-bit/8bit mode select	Note 2	
29	AVDD	Р	Power for analog circuit		
30	GND	P	Ground		
31	LED-	Р	LED cathode		
32	LED-	Р	LED cathode		
33	L/R	<u> </u>	Horizontal inversion	Note 3,4	
34	U/D	<u> </u>	Vertical inversion	Note 3,4	
35	VGL	 Р	Gate OFF voltage	110000,1	
36	NC		No connection		
37	NC		No connection No connection		
38	VGH	P			
39	LED+	P	Gate ON voltage LED anode		
40	LED+	P	LED anode		
40	LED+	Ρ	LLD allone		



I: input, P: Power

Note 1. Global reset pin. Active Low to enter Reset State. Normally pull high.

It's necessary to connecting with an RC delay circuit for stability.

(GRB delay VDD larger than 1ms)

Note 2. If LVDS input data is 6 bits, SELB must be set to High; If LVDS input data is 8 bits, SELB must be set to Low.

Note 3. When L/R = "0", set right to left scan direction. When L/R = "1", set left to right scan direction. When U/D = "0", set top to bottom scan direction.

Note 4. U/D R/L Function Description

SETTING OF SCAN	SCANNING DIRECTION	
U/D	L/R	
GND	DVDD	Up to down, left to right
DVDD	GND	Down to up, right to left
GND	GND	Up to down, right to left
DVDD	DVDD	Down to up, left to right

11.2 Touch panel assignment

PIN NO.	SYMBOL	DESCRIPTION	NOTE
1	USB_GND	USB_ Ground	
2	USB_VDD	USB Power for CTP, 5.0V	
3	USB_D-	USB _Data Signal –	
4	USB_D+	USB _Data Signal +	
5	I2C_GND	I2C _ Ground	
6	I2C_VDD	I2C _Power for CTP, 3.3 V	
7	I2C_RST	I2C _Reset Pin, Active low	
8	I2C_SCL	I2C _Clock Input	Note 1
9	I2C_INT	I2C _Interrupt Signal from CTP, Active low	
10	I2C_SDA	I2C _Data Signal	

Note 1. External pull-up resistors are required.

11.3 CON1 assignment

PIN NO.	SYMBOL	DESCRIPTION
1	USB_VDD	USB_Power for CTP, DC 5.0V
2	USB_D-	USB_Data Signal -
3	USB_D+	USB_Data Signal +
4	USB_GND	USB_Ground



12.TIMING CHARACTERISTICS

12.1 Parallel RGB timing characteristic

12.1.1 DE MODE

PARAMETER	SYMBOL		VALUE		UNIT
PARAMETER	STMBOL	MIN.	TYP.	MAX.	ONIT
DCLK frequency (Frame rate 60Hz)	fclk	40.8	51.2	67.2	MHz
Horizontal display area	thd		1024		
HSYNC period time	th	1114	1344	1400	DCLK
HSYNC blanking	thb+thfp	90	320	376	
Vertical display area	tvd		600		
VSYNC period time	tv	610	635	800	Н
VSYNC blanking	tvb+tvfp	10	85	200	

12.1.2 HV MODE – Horizontal input timing

PARAMETER	SYMBOL		VALUE		UNIT
PARAMLILK	STMBOL	MIN.	TYP.	MAX.	ONIT
Horizontal display area	thd		1024		DCLK
DCLK frequency (frame rate 60Hz)	fclk	44.9	51.2	63	MHz
1 Horizontal Line	th	1200	1344	1400	
HSYNC pulse width	thpw	1	-	140	DCLK
HSYNC back porch	thbp	160	160	160	DCLK
HSYNC front porch	thfp	16	160	216	

12.1.3 HV MODE – Vertical input timing

PARAMETER	SYMBOL		VALUE		UNIT
PARAMETER	STMBOL	MIN.	TYP.	MAX.	ONIT
Vertical display area	tvd		600		
VSYNC period time	tv	624	635	750	
VSYNC pulse width	tvpw	1	-	20	Н
VSYNC back porch	tvb	23	23	23	
VSYNC front porch	tVfp	1	12	127	1



12.1.4 Data input format

Figure 4. 6 -bit LVDS Input Timing chart


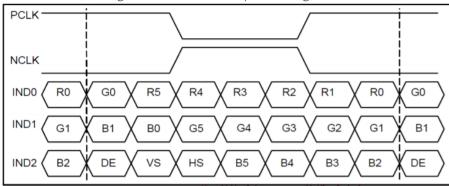



Figure 5. 8- bit LVDS Input Timing chart




12.2 AC characteristics

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Clock Frequency	RxFCLK		20	-	71	MHz
Input Data Skew	TRSKM	VID =400mV	500	-	-	ps
Margin		RxVCM=1.2V				
		RxFCLK=71MHz				
Clock High Time	TLVCH	-	-	4/(7*RxFCLK)	20	ns
Clock Low Time	TLVCL	-	-	3/(7*RxFCLK)	23	ns
PLL wake-up-time	TenPLL	-	-	-	150	us

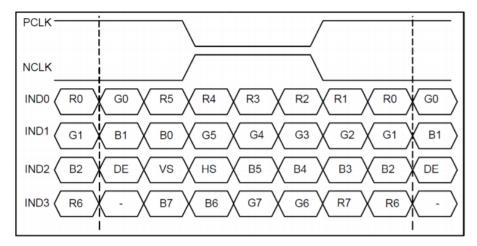

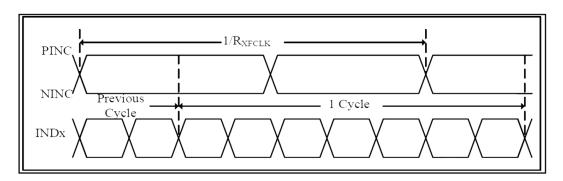

LVDS timing(1)

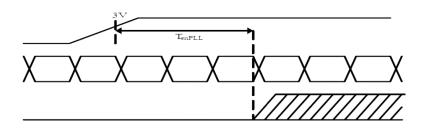

LVDS timing(2)

Ideal strobe position

T_{RSKM}

T_{SW}

T_{RSKM}

Tsw:Receiver strobe position Trskm:Receiver strobe margin


LVDS timing(3)



12.3 Power ON/OFF sequence

In order to prevent IC from power on reset fail, the rising time (TROP) of the digital power supply VDD should be maintained with the given specifications. Refer to "AC Characteristics" for more detail on timing.

There is another paragraph of sub-function description.

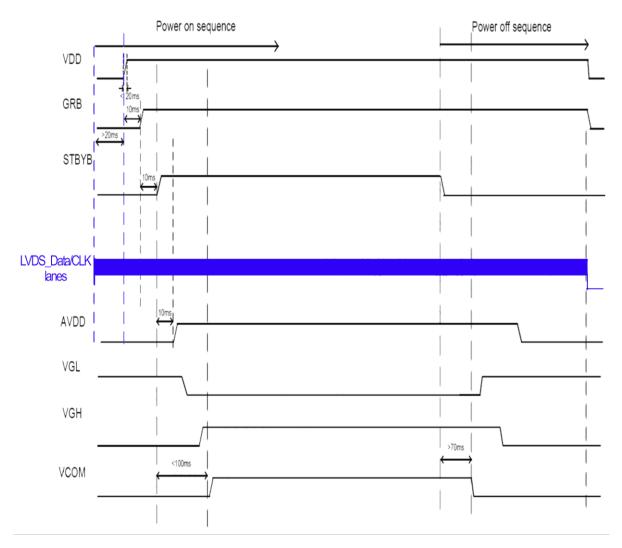

Note 1: GRB (Global Reset Pin) is internally connected to TFT interface pin 5, RESET.

Active Low to enter Reset State. Normally pull high.

It's necessary to connecting with an RC delay circuit for stability.

(GRB delay VDD larger than 1ms)



13.CAPACITIVE TOUCH SCREEN PANEL SPECIFICATIONS

13.1 Mechanical characteristics

DESCRIPTION	SPECIFICATION	REMARK
Touch Panel Size	7.0 inch	
Outline Dimension of CTP	179.96 mm x 119.00 mm	
Product Thickness	2.03 mm	
Glass Thickness	1.1 mm	
CTP View Area	155.01 mm x 86.72 mm	uxTouch
Sensor Active Area	156.68 mm x 88.52 mm	
Structure type	Glass + Glass	
Surface Hardness	7H	

13.2 Electrical characteristics

DESCRIPTION		SPECIFICATION
Power Consumption (IDD)	Active Mode	90 mA
	Sleep Mode	10 mA
Linearity		+/- 1.5mm
Controller		ILI2132A
Resolution		1024 x 600



14. INSPECTION

Standard acceptance/rejection criteria for TFT module


14.1 Inspection condition

Ambient conditions:

- Temperature: 25 ± 2°C
- Humidity: (60 ± 10) %RH
- Illumination: Single fluorescent lamp non-directive (300 to 700 lux)

Viewing distance: 35 ± 5cm between inspector bare eye and LCD.

Viewing Angle: U/D: 45°/45°, L/R: 45°/45°

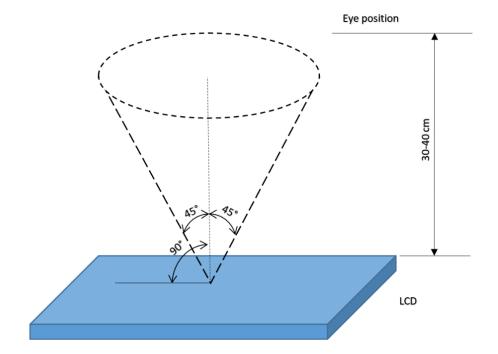



14.2 Inspection standard

ITEM		CRITE	RIOI	٧		
	_ x _	Size =7"				
Black spots,		Average Diameter		Qualified Qty		
white spots, light leakage, Foreign Particle (round Type)		D ≤ 0.2 m	nm		lgn	ored
	D=(x+y)/2	0.2 mm <	< D ≤ ().3 mm	N≤3	3
	Spots density: 10 mm	0.5mm <	D		Not	allowed
	Width ———			Size = 7	"	
		Lengt	:h	Width		Qualified Qty
LCD black spots, white spots, light leakage	長	-		W ≤ 0.0	5	Ignored
(line Type)	Length	L ≤ 5.0	0	0.05< W ≤	0.1	N≤3
	[5.0 <	L	0.10< W	/	Not allowed
	Spots density: 10 mm					
	Size = 7					
Bright/Dark	Item		Qualified Qty			
Dots	Bright dots		N ≤ 2			
	Dark dots	.	N≤3			
	Total Bright and Dark		ots N ≤ 4 Size ≥ 5"			
	Average Diamento		Qualified Qty			
	Average Diameter D < 0.2 mm	Ignored				
Clear spots	0.2 mm < D < 0.3 m	_				
Cicui spots	0.3 mm < D < 0.5 m					
	0.5 mm < D		0			
	Spots density: 10 mm					
		Size	≥ 5"			
Polarizer bubbles	Average Diameter		Qualified Qty			
	D < 0.25 mm		Ignored			
	0.25 mm < D < 0.5 mm		3			
	0.5 mm < D				0	
		Size	≥ 5"			
Touch panel	Average Diameter	r	Qualified Qty			
spots	D < 0.25 mm		Ignored			
	0.25 mm < D < 0.5 m	ım	4			



	0.5 m	m < D	0	
		Size ≥ 5"		
Touch panel	Length	Width	Qualified Qty	
white line	-	W < 0.03	Ignored	
scratch	L < 5.0	0.03 < W < 0.05	2	
	-	0.05 < W	0	

15. RELIABILITY TEST

NO.	TEST ITEM	TEST CONDITION	NOTE
1	High Temperature Storage	80°C/120 hours	
2	Low Temperature Storage	-30°C/120 hours	
3	High Temperature Operating	70 °C /120 hours	Note 1
4	Low Temperature Operating	-20°C/120 hours	
5	High Temperature and High Humidity	Humidity 40°C, 90%RH, 120Hrs	
6	Thermal Cycling Test (No operation)	-20°C for 30min, 70°C for 30 min. 100 cycles. Then test at room temperature after 1 hour	Note 2
7	Vibration Test	Frequency: 10 ÷ 55 Hz. Stroke: 1.5 mm. Sweep: 10Hz ÷ 55Hz ÷ 10 Hz. 2 hours for each direction of X, Y, Z (Total 6 hours)	
8	Package Drop Test	Height: 60 cm 1 corner, 3 edges, 6 surfaces	

Note 1. Sample quantity for each test item is $5 \div 10$ pcs.

Note 2. Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.



16.LEGAL INFORMATION

Riverdi grants the guarantee for the proper operation of the goods for a period of 12 months from the date of possession of the goods. If in a consequence of this guaranteed execution the customer has received the defects-free item as replacement for the defective item, the effectiveness period of this guarantee shall start anew from the moment the customer receives the defects-free item.

Information about device is the property of Riverdi and may be the subject of patents pending or granted. It is not allowed to copy or disclosed this document without prior written permission.

Riverdi endeavors to ensure that all contained information in this document is correct but does not accept liability for any error or omission. Riverdi products are in developing process and published information may be not up to date. Riverdi reserves the right to update and makes changes to Specifications or written material without prior notice at any time. It is important to check the current position with Riverdi.

Images and graphics used in this document are only for illustrative the purpose. All images and graphics are possible to be displayed on the range products of Riverdi, however the quality may vary. Riverdi is no liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) relating to any product, service provided or to be provided by Riverdi, or the use or inability to use the same, even if Riverdi has been advised of the possibility of such damages.

Riverdi products are not fault tolerant nor designed, manufactured or intended for use or resale as on line control equipment in hazardous environments requiring fail–safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of the product could lead directly to death, personal injury or severe physical or environmental damage ('High-Risk Activities'). Riverdi and its suppliers specifically disclaim any expressed or implied warranty of fitness for High-Risk Activities. Using Riverdi products and devices in 'High-Risk Activities' and in any other application is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Riverdi from all damages, claims or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Riverdi intellectual property rights.

Hi, I am here to help you!
If you have any additional questions, please contact our support via email: contact@riverdi.com