


|           |              |            |
|-----------|--------------|------------|
| Revision: | Changes:     | Date:      |
| 1.0       | Initial Case | 2021.11.02 |



**GENERAL NOTES:**  
 1. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm  
 2. RoHS3 COMPLIANT

PN: DON ADDON 101 LVDS\_Rev1.0  
 SN:  
 DRAWN: M.Natywa  
 CHECKED: Carol Gao  
 APPR:

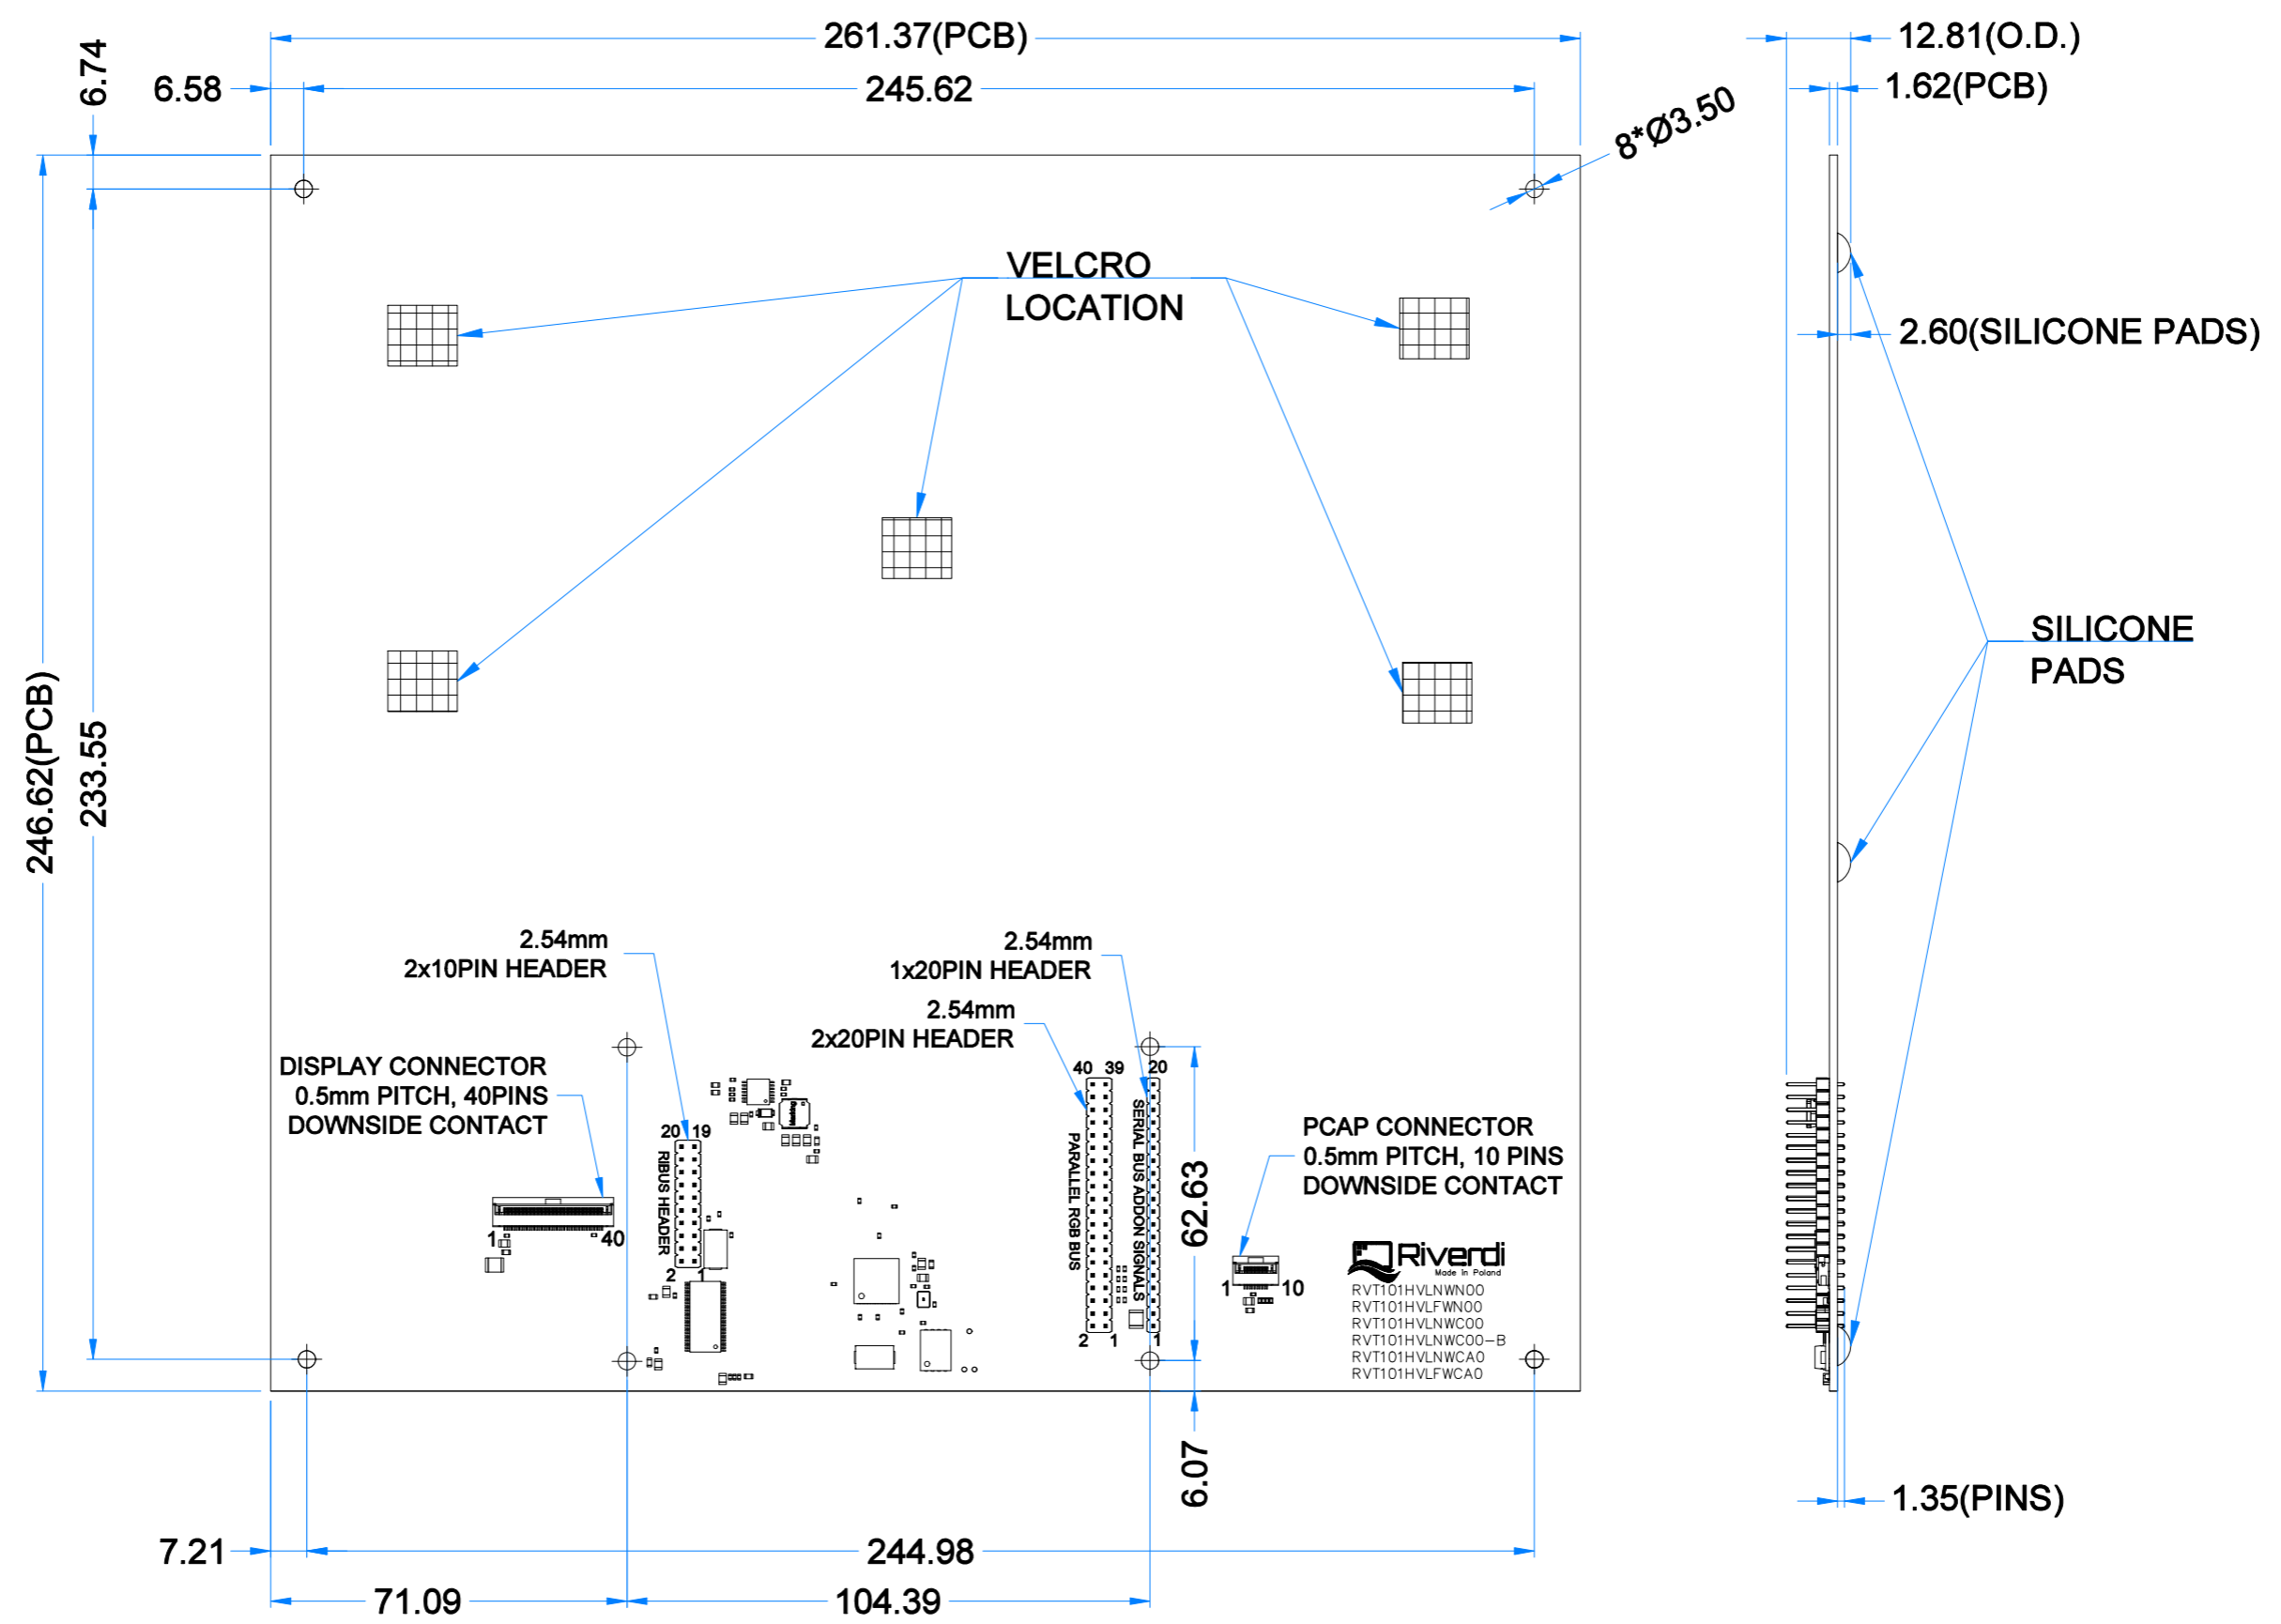

|            |           |  |
|------------|-----------|--|
| 2021.11.02 | 1:1.42    |  |
| 2021.11.03 | [mm]      |  |
| ISO A3     | P. 1 of 1 |  |



| DISPLAY CONNECTOR |           |         |        |
|-------------------|-----------|---------|--------|
| Pin No.           | Desc.     | Pin No. | Desc.  |
| 1                 | NC        | 21      | RXIN3+ |
| 2                 | VDD(3.3V) | 22      | GND    |
| 3                 | VDD(3.3V) | 23      | NC     |
| 4                 | NC        | 24      | NC     |
| 5                 | NC        | 25      | GND    |
| 6                 | NC        | 26      | NC     |
| 7                 | GND       | 27      | NC     |
| 8                 | RXIN0-    | 28      | NC     |
| 9                 | RXIN0+    | 29      | NC     |
| 10                | GND       | 30      | GND    |
| 11                | RXIN1-    | 31      | LED-   |
| 12                | RXIN1+    | 32      | LED-   |
| 13                | GND       | 33      | NC     |
| 14                | RXIN2-    | 34      | NC     |
| 15                | RXIN2+    | 35      | NC     |
| 16                | GND       | 36      | NC     |
| 17                | RXCLK-    | 37      | NC     |
| 18                | RXCLK+    | 38      | NC     |
| 19                | GND       | 39      | LED+   |
| 20                | RXIN3-    | 40      | LED+   |

| TOUCH PANNEL CONNECTOR |               |         |               |
|------------------------|---------------|---------|---------------|
| Pin No.                | Desc.         | Pin No. | Desc.         |
| 1                      | USB_GND       | 6       | I2C_VDD(3.3V) |
| 2                      | USB_VDD(5.0V) | 7       | I2C_RST       |
| 3                      | USB_D-        | 8       | I2C_SCL       |
| 4                      | USB_D+        | 9       | I2C_INT       |
| 5                      | I2C_GND       | 10      | I2C_SDA       |